



GEDA[®]
ORIGINAL



**GEDA
PRODUCT
RANGE**

THE NEXT LEVEL

┌

└

Dear customers,

High quality, on time-deliveries and a customer-orientated service are general expectations and naturally they go without saying for GEDA. So what makes the difference? All our business activities are based on good interpersonal relations which specifically means that in all our actions we focus on the needs of our employees, our customers and our suppliers. We not only consider ourselves as a manufacturer or employer, but also as a reliable partner. Contented, long-term employees together with fair and constructive partnerships with our customers as well as close trust cooperation with our suppliers make the difference!

Our employees are the people behind the name GEDA and through their daily commitment to our products, their high levels of professional qualifications and their loyalty and identification with the company, they create the basis of our success. The ideas, knowledge and commitment of each individual employee have been propelling GEDA forwards for decades. Therefore we encourage and challenge our employees with targeted further training and give them space for their own personal developments.


































This is underpinned by a flat organisational structure and teamwork at all levels. In addition, GEDA also views the training of young people to be very important as this is the only means of continuing the GEDA success story in the future.





















Johann Sailer
CEO




THE NEXT LEVEL

PRODUCT INDEX

	BATTERY-LINE	32
	GEDA BatteryLadderLIFT	34
	ROPE HOISTS	38
	GEDA STAR	40
	GEDA MINI / MAXI	46
	GEDA LIFT	52
	GEDA REMOVAL HOIST	60
	GEDA SOLARLIFT	62
	RACK AND PINION HOISTS MATERIAL HOISTS	64
	GEDA 200 Z	66
	GEDA 300 Z	70
	GEDA 500 Z	74
	GEDA 500 Z DUO	78
	GEDA 300 Z BOILER HOIST	84
	RACK AND PINION HOISTS TRANSPORT PLATFORMS FOR PERSONS AND MATERIAL	88
	GEDA 300 Z/ZP	90
	GEDA 500 Z/ZP	94
	GEDA 1200 Z/ZP	100
	GEDA 1500 Z/ZP	110
	GEDA 3700 Z/ZP	126
	RACK AND PINION HOISTS PERSONNEL AND MATERIAL HOISTS	130
	GEDA MULTILIFT P6	134
	GEDA MULTILIFT P12	138
	GEDA MULTILIFT P18	142
	GEDA MULTILIFT P22	146
	GEDA PH 2032	152
	GEDA PH 2737	156
	GEDA PH 3240	160
	GEDA BL 2000	166
	GEDA SBL 2000	170
	GEDA 2 PK	176
	RACK AND PINION HOISTS MAST CLIMBING PLATFORMS	180
	GEDA MCP	182

	INDUSTRIAL ELEVATORS SERVICE HOISTS	186
	GEDA SH	188
	INDUSTRIAL ELEVATORS MATERIAL HOISTS	192
	GEDA 850 ZM P	194
	GEDA 1200 ZM P	198
	INDUSTRIAL ELEVATORS TRANSPORT PLATFORMS FOR PERSONS AND MATERIAL	202
	GEDA 300 ZP P	204
	GEDA 500 ZP P	208
	GEDA 1200 ZP P	212
	GEDA 1500 ZP P	216
	INDUSTRIAL ELEVATORS PERSONNEL AND MATERIAL HOISTS	222
	GEDA MULTILIFT P12 P	224
	GEDA MULTILIFT P18 P	228
	SUSPENDED WORKING PLATFORMS	232
	GEDA AB 450 / 650	234
	GEDA Suspended Working Platform Standard	236
	GEDA AB 650 M	238
	RUBBISH CHUTES	240
	GEDA RUBBISH CHUTE STANDARD / COMFORT	242

www.geda.de

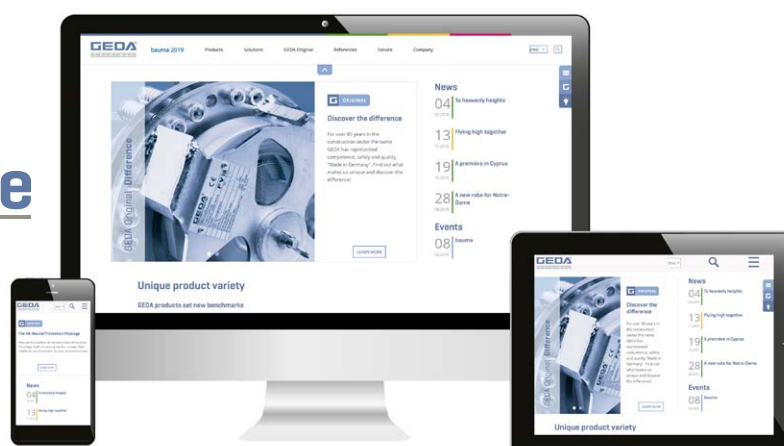

An aerial photograph of a large industrial complex. The main building has a distinctive red, multi-gabled roof. To its left is a smaller white building with a grey roof. A parking lot with many cars is situated between the buildings. In the foreground, there are several semi-trailers, one of which is labeled 'CargoTrans'. The facility is surrounded by green trees and a paved road.

ABOUT GEDA

For more than nine decades GEDA is a huge name in the construction hoist sector and on building sites across the world represents quality and unique expertise “Made in Germany”. Over the decades the company has developed a comprehensive and unrivalled product range. From compact wire rope hoists for workmen through personnel and material hoists – the GEDA product range could not be wider. Added to this are the industrial hoists product ranges as well as special solutions for special purposes.





Company Head Office

Asbach-Bäumenheim, Bavaria

GEDA-Dechentreiter GmbH & Co. KG

Mertinger Straße 60

86663 Asbach-Bäumenheim

Phone: +49 906 9809-0

Fax: +49 906 9809-50

www.geda.de

Gera, Thuringia

GEDA-Dechentreiter GmbH & Co. KG

Eastern Subsidiary

Ernst-M.-Jahr-Straße 5

07552 Gera

Phone: +49 365 55280-0

Fax: +49 365 55280-29

www.geda.de

Bergkamen, North Rhine-Westphalia

GEDA-Dechentreiter GmbH & Co. KG

Northwest Subsidiary

Marie-Curie-Straße 11

59192 Bergkamen-Rünthe

Phone: +49 2389 9874-32

Fax: +49 2389 9874-33

www.geda.de



Moscow, Russia

GEDA RUS, LLC

Tsentralnaya str., build. 3/1
office H-208 Nagornoye
Moscow region 141031
Russian Federation
Phone: +7 495 150-42-67
Fax: +7 495 150-43-67
www.geda-lift.ru

Istanbul, Turkey

GEDA MAJOR

IS VE INSAAT MAKINALARI SAN. TIC. LTD. STI.

Semsettin Günaltay Cad. No:224 A
Blok K:2 D:5
Tüccarbasi/Erenköy
34734 Istanbul
Turkey
Phone: +90 216 4782108
Fax: +90 216 4673564
www.geda-major.com.tr

League City, Texas, USA

GEDA USA, LLC

1151 Butler Road
League City (Houston), TX 77573
USA
Phone: +1 713 6217272
Fax: +1 713 6217279
Toll-Free: +1 866 9734332
www.gedausa.com

Seoul, Korea

GEDA KOREA

1708 (MetroDioVill Bldg.
Singogdeok-dong) 199
Baekboem-ro, Mapo-gu
Seoul 04195
Korea
Phone: +82 2 63837001
Fax: +82 2 63837009
www.gedakorea.com



TEMPORARY INSTALLATIONS

- ▶ **Rope Hoists**
- ▶ **Rack and Pinion Hoists**
 - Material Hoists**
 - Transport Platforms for Persons and Material**
 - Personnel und Material Hoists**
- ▶ **Suspended Working Platforms**
- ▶ **Rubbish Chutes**



PERMANENT INSTALLATIONS

- ▶ **Industrial Elevators**
- ▶ **Rack and Pinion Hoists**
 - Material Hoists**
 - Transport Platforms for Persons and Material**
 - Personnel und Material Hoists**





SPECIAL PRODUCTS

- ▶ **Battery-Line**
- ▶ **Rope Hoists**
- ▶ **Rack and Pinion Hoists**



SERVICE

- ▶ **Technical Support**
- ▶ **Assembly Work**
- ▶ **Training / Seminars**
- ▶ **Customer Service**



GEDA SOLUTIONS

Construction site, Industry or Façade works - GEDA offers you the right solutions for your sector.
Try it! - www.geda.de/en/solutions

GEDA®
ORIGINAL

Produkte


Einsatzwelten

GEDA Original

Referenzen

Home / Einsatzwelten


We offer you the right s

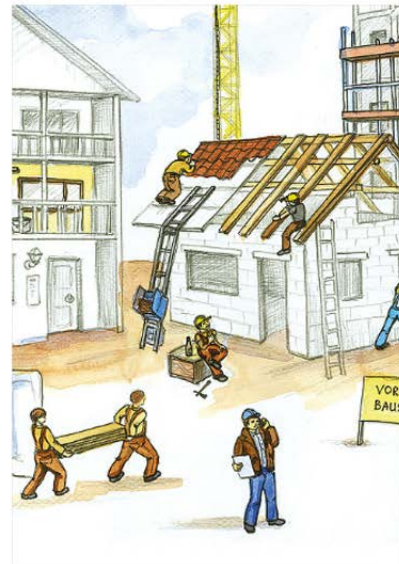

Solutions for the Construction site

With their flexibility and versatility, GEDA product solutions can handle virtually every construction challenge they are faced with.

Discover GEDA's diversity on the construction site and you will find the appropriate helper for your own particular line of work!

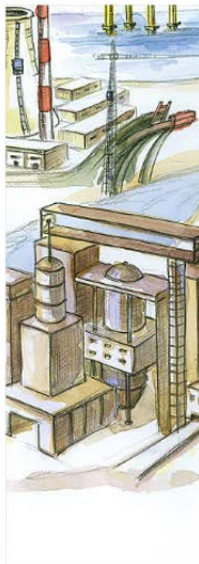


Solutions for Industry

Using state-of-the-art industrial hoist solutions and produced specifically for a wide range of industrial applications.

Despite the sometimes harsh environmental conditions, GEDA solutions ensure the safe transport of persons and goods. Discover the GEDA products for your own industrial environment.



Solutions for your sector

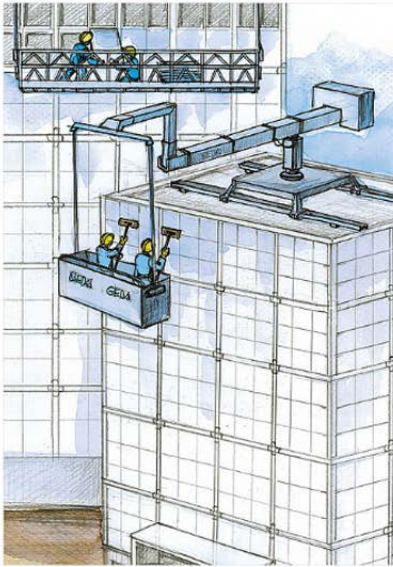

For the

Engineering, GEDA
solutions are designed
specifically to the needs of
industrial sectors.
In rough
situations GEDA lift
efficient and safe
and materials.
Product solutions for
operations!

Solutions for Façade works

Façade work covers many different
disciplines such as cleaning, new
constructions or renovations. Whatever
the requirements set by the architecture,
statics or meteorological situations,
GEDA has solutions for all exterior façade
works. Discover the GEDA product
solutions for your façade!




GEDA 1500 Z/ZP
Hamburg
Germany





**OVER
90 YEARS
SATISFIED
CUSTOMERS!**

ALL-ROUND PROTECTION FOR YOUR HOIST

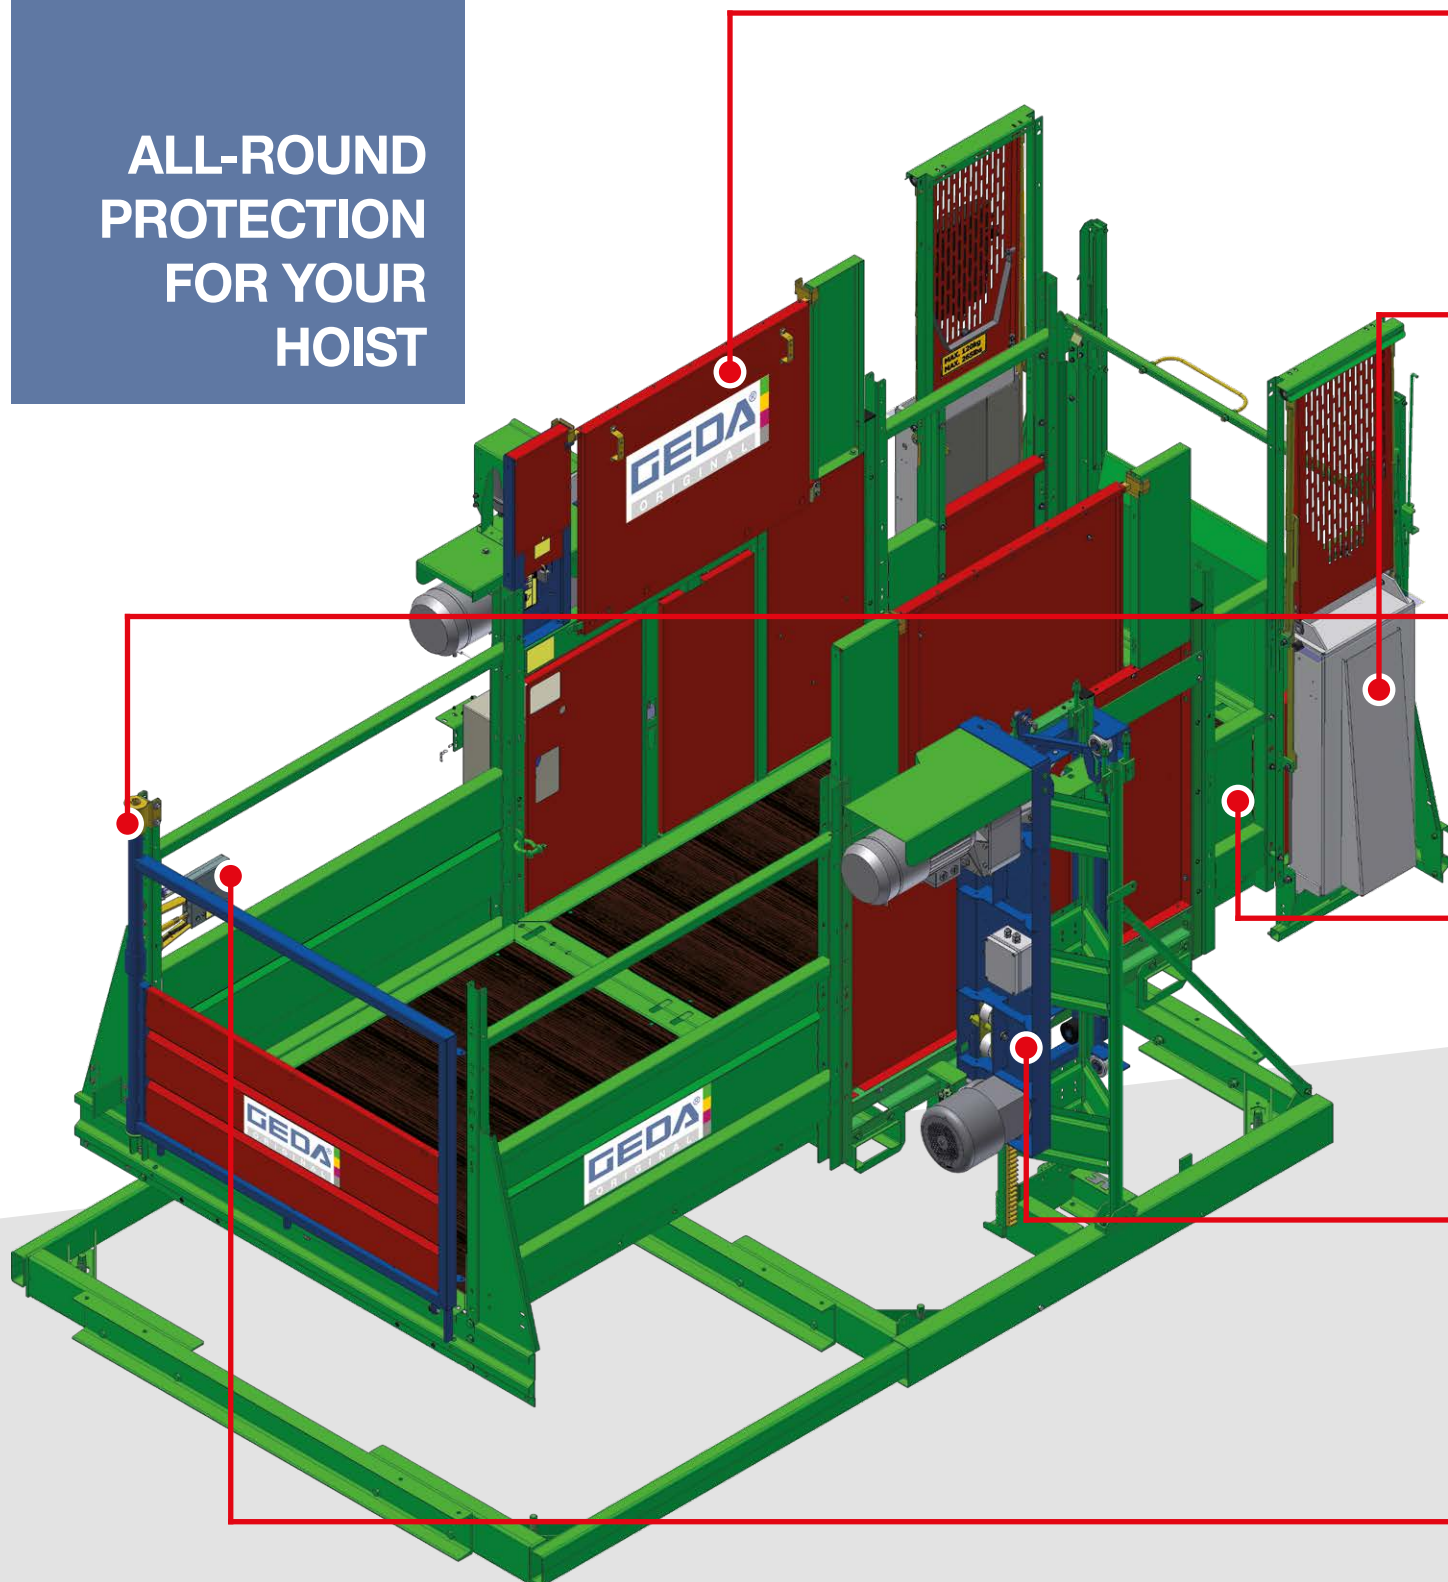

NEW: Rounding Machine

We have invested in state-of-the-art technology so that in future we can also fully protect the corners of our devices from corrosion. Rounded corners enable the coating to be applied consistently, significantly improving the durability of the surface coating on the corners.

GALVANIZATION AND POWDER COATING/ LACQUER

The use of pre-galvanized sheet metal guarantees high corrosion protection. A subsequent application of the powder coating or lacquer creates an individual colour scheme.

ELECTRO GALVANIZATION

High corrosion resistance and optimum stability with a low weight distinguish this light metal.

ALUMINIUM

CATHODIC DIP PAINT AND POWDER COATINGS

The dip process creates a long-lasting, reliable and resistant corrosion protection coat in the form of a zinc alloy layer.

In cathodic dip-paint coating the workpiece is immersed in a dip and coated with a very fine primer using electric current. A powder coating is then applied. The main benefits are the optimum coating of cavities, a high level of quality and cost-effectiveness.


HOT-DIP GALVANIZATION

**V2A
(STAINLESS
STEEL)**

The high chromium and nickel content of V2A ensures high resistance to oxidising metals making it corrosion-resistant.

NEW

**THE MOST
INNOVATIVE
MAST SYSTEM
EVER!**

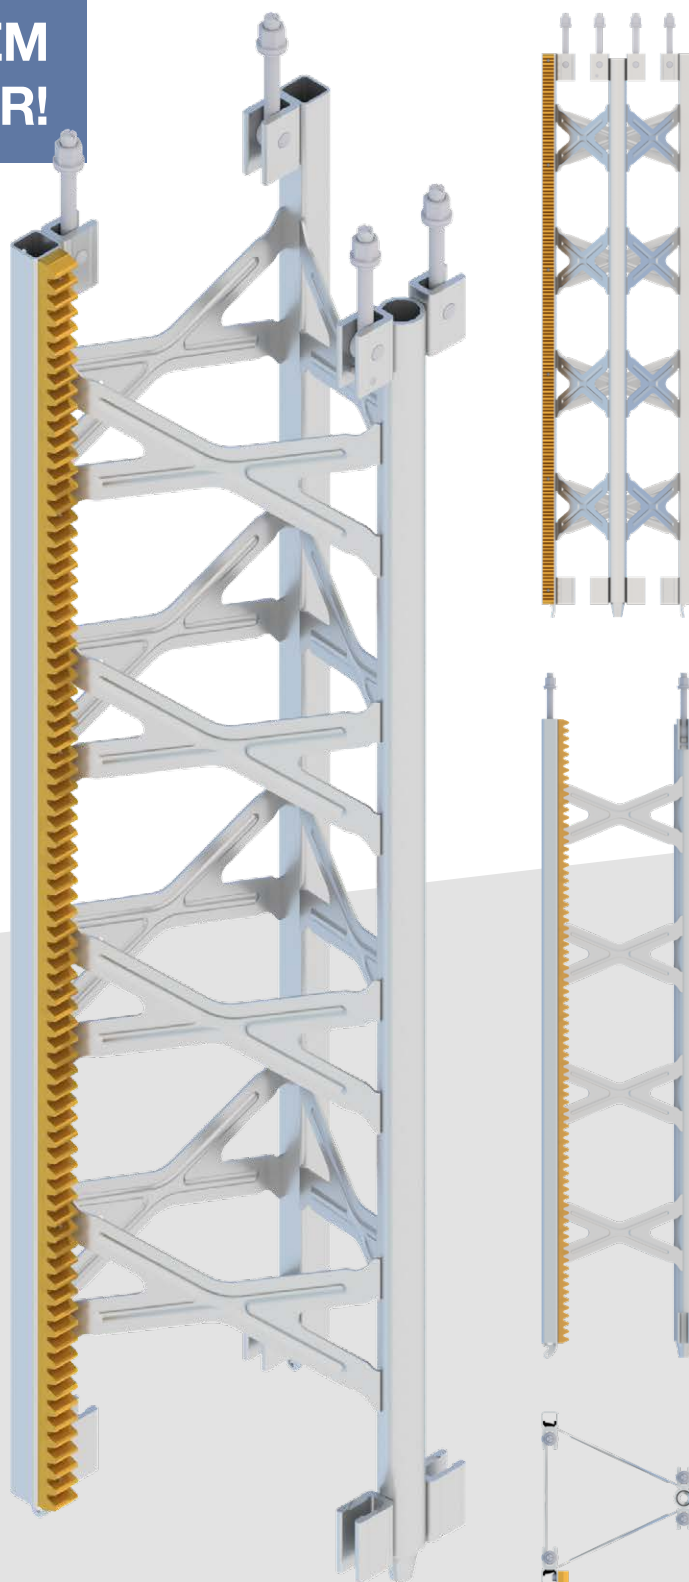

THE ADVANTAGES SPEAK FOR THEMSELVES!



Pioneering, efficient mast system

A genius system: the GEDA UNI-X-MAST system covers a large number of GEDA hoist solutions with load capacities of 300 to 2,000 kg.



Completely new development

Decades of know-how and outstanding features, for example the captive screws and nuts of the proven GEDA UNI-MAST system, went into the development of the new GEDA UNI-X-MAST. The result is impressive, not least due to its excellent structural properties.



Compatible with the proven GEDA UNI-MAST system

The mast elements and mast brackets of the new GEDA UNI-X Mast are fully compatible with the proven GEDA UNI-MAST system.



Low weight

Health and safety aspects are becoming more and more important on construction sites. The GEDA UNI-X-MAST system scores highly here with easy handling due to the 10% lower dead weight of the individual mast elements compared to GEDA UNI-MAST.




Flexible mast bracket

Thanks to the specially developed mast bracket, the GEDA UNI-X-MAST can be individual adapted to the conditions on site.



Made in Germany

Unique robustness and durability with proven GEDA quality: all components of the GEDA UNI-X-MAST system carry the "Made in Germany" mark.

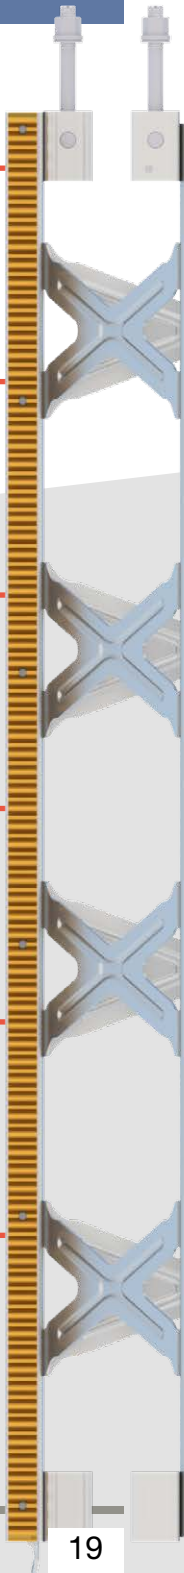


GEDA MAST SYSTEMS



GEDA UNI-X-MAST



GEDA VARIO-MAST



GEDA S-MAST

Temporary installations

**GEDA
500 Z**

**GEDA
500 Z DUO**

**GEDA
300 Z/ZP**

**GEDA
500 Z/ZP**

**GEDA
1500 Z/ZP**

**GEDA
MULTILIFT P6**

**GEDA
MULTILIFT P18**

**GEDA
MCP**

**GEDA
1200 Z/ZP**

**GEDA
3700 Z/ZP**

**GEDA
MULTILIFT P12**

**GEDA
MULTILIFT P22**

**GEDA
BL 2000**

**GEDA
SBL 2000**

Permanent installations

**GEDA
850 ZM P**

**GEDA
300 ZP P**

**GEDA
500 ZP P**

**GEDA
1500 ZP P**

**GEDA
MULTILIFT P18 P**


**GEDA
1200 ZM P**

**GEDA
1200 ZP P**

**GEDA
MULTILIFT P12 P**

**GEDA
SH Range**

Special products



GEDA PH-MAST



GEDA ALU-LEITER



GEDA ALU-MAST

**GEDA
PH 2032**

**GEDA
PH 2737**

**GEDA
PH 3240**

**GEDA
200 Z**

**GEDA
300 Z**

Temporäranlagen


**GEDA
SH Serie**

Permanentanlagen


**GEDA
2 PK**

**GEDA
300 Z BOILER
HOIST**

Spezialprodukte

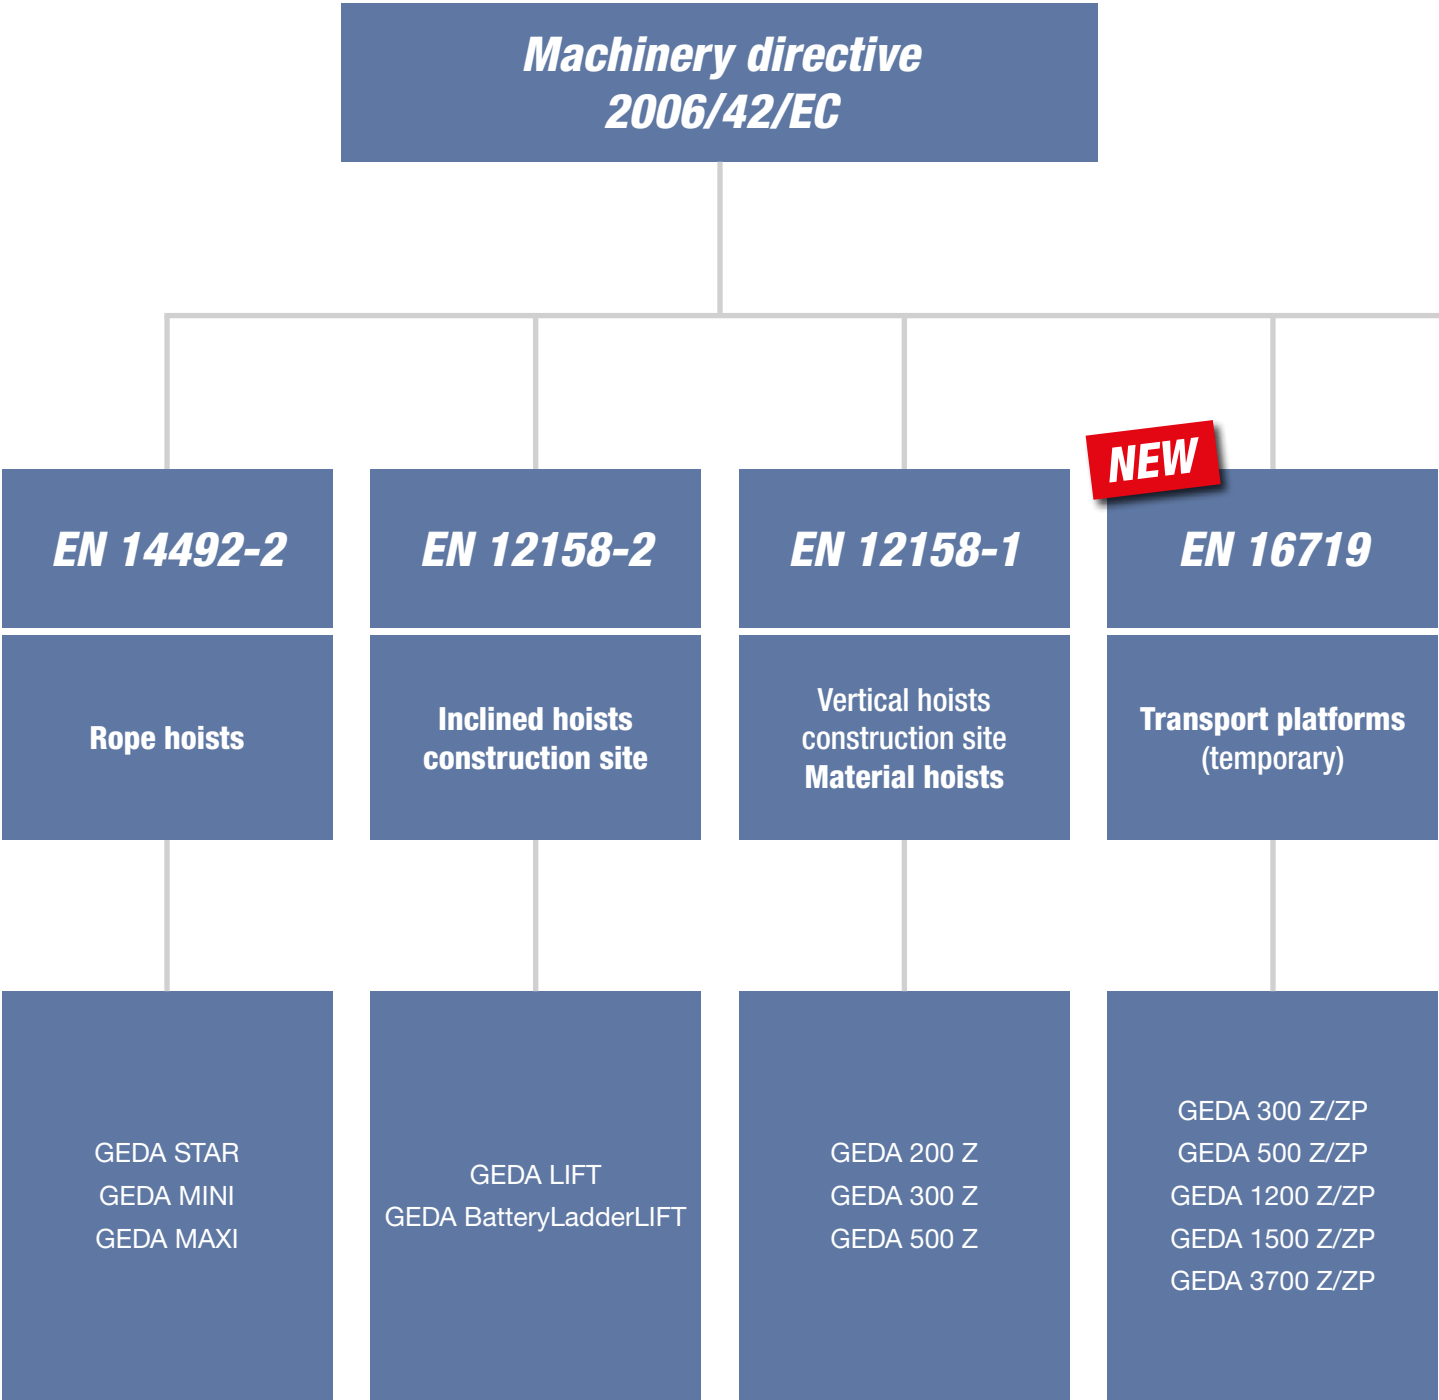


Deviating national regulations must be noted.

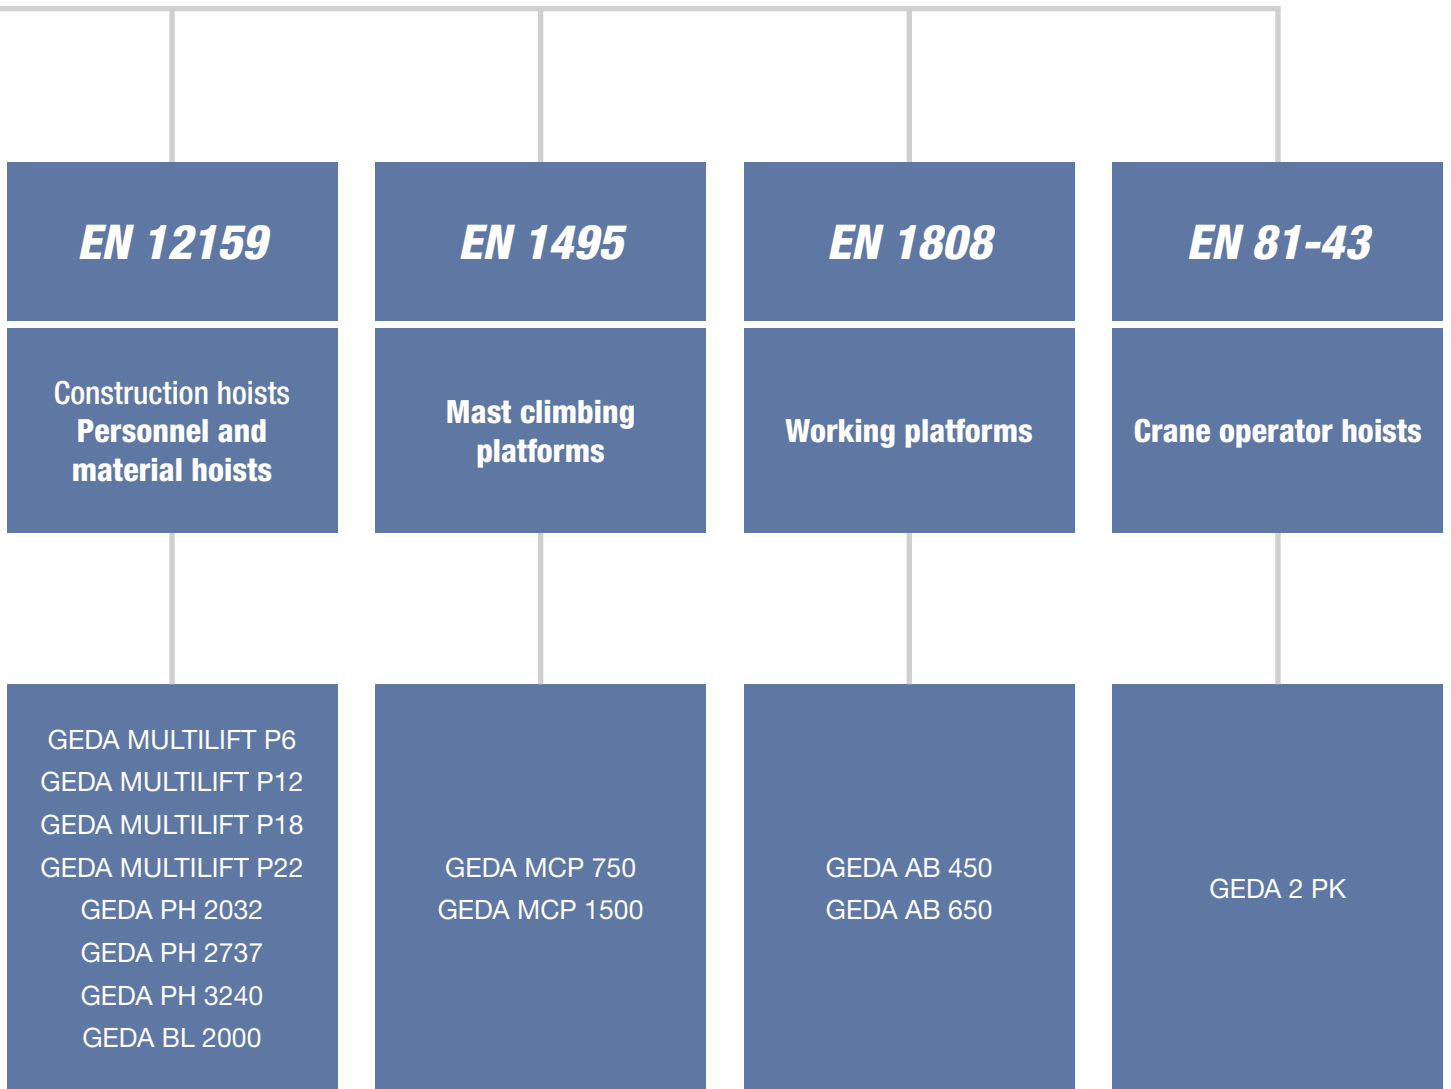

GEDA is already perfectly positioned for implementing the requirements of the new EN 16719 standard, which will from now on apply to transport platforms. The new regulations include extensive requirements regarding safety, for example base enclosure, landing level safety gates, anti-smashing-device, roof, etc.


On the following pages you will find the requirements of the EN 16719 and the customer and cost-effective solution from GEDA at a glance.

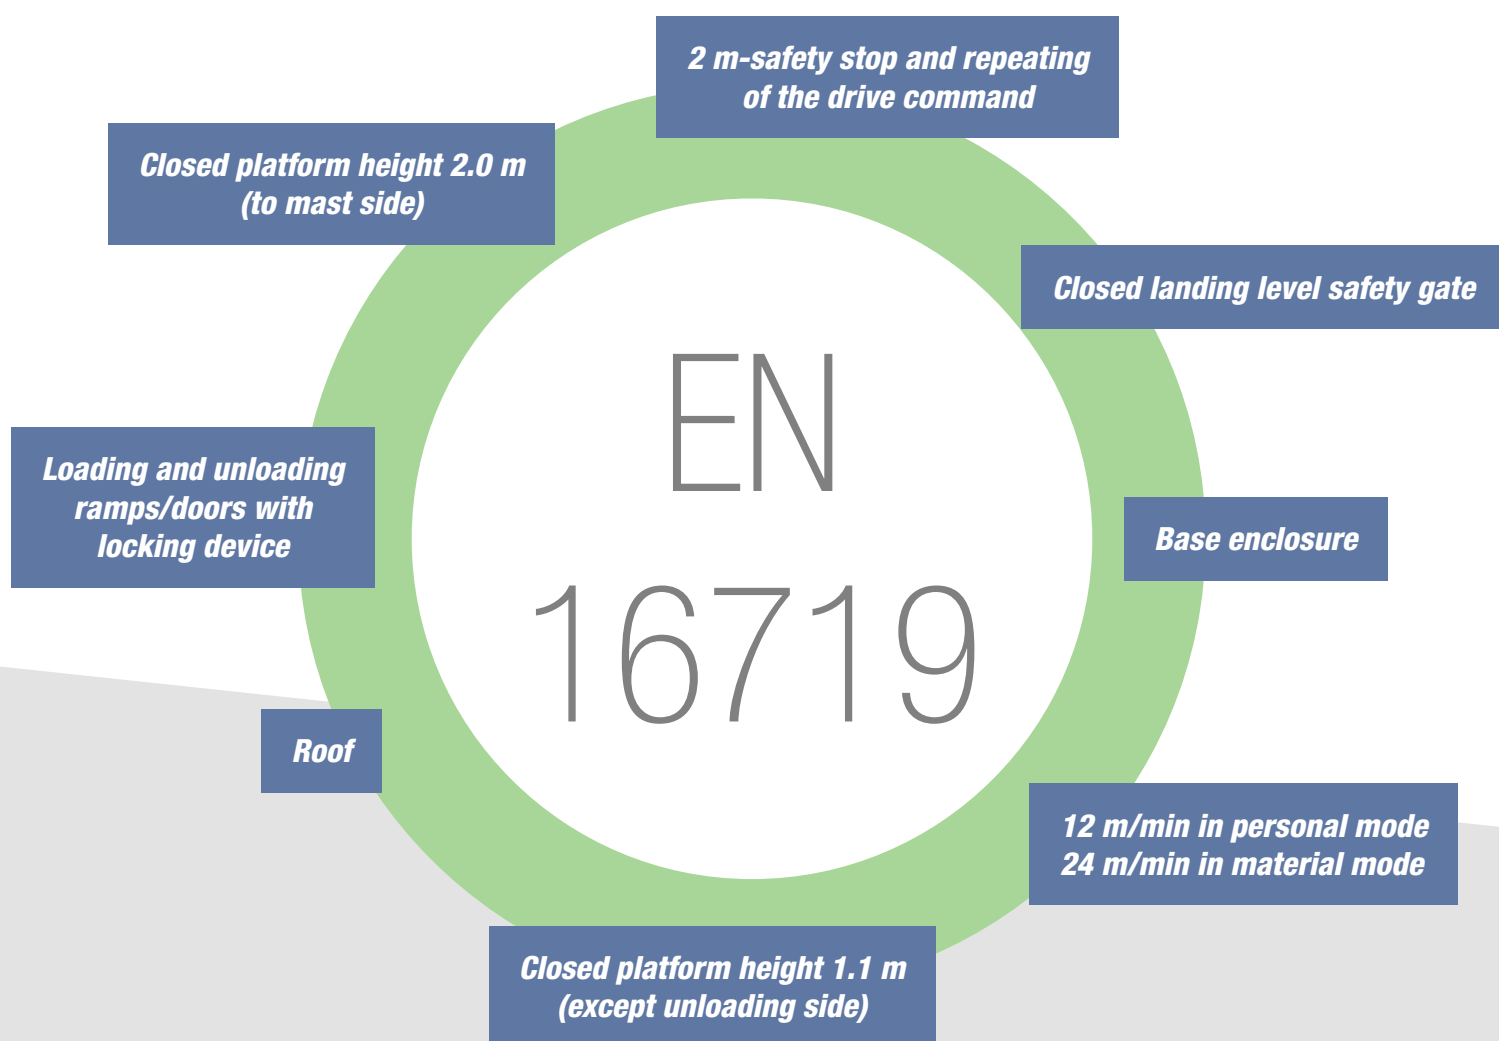

GEDA SOLUTION!

Cost-effective ✓
Tested for type examination by TÜV SÜD ✓
Customer oriented ✓

EN
16719

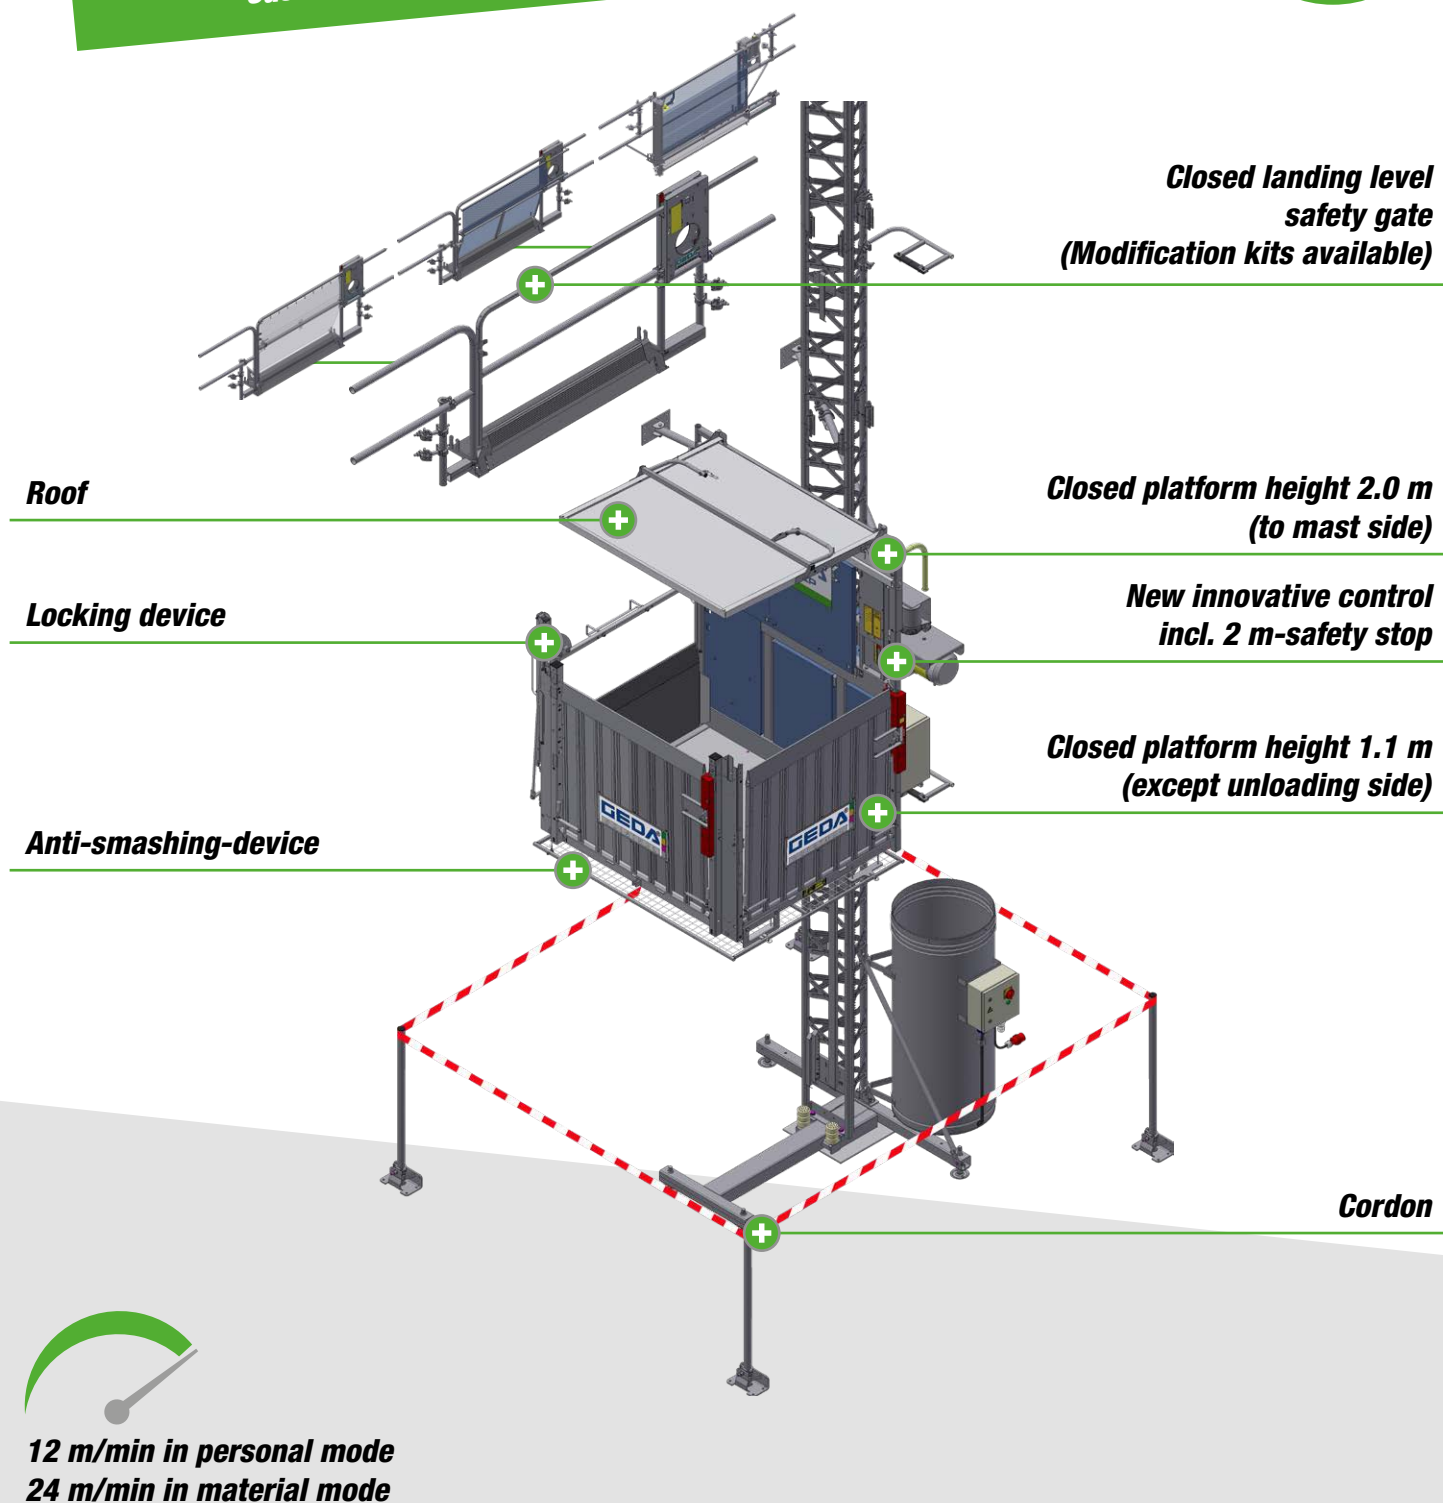

GEDA SERVICE-CENTER

*Company Head Office, Asbach-Bäumenheim
Germany*



SERVICE





TECHNICAL SUPPORT



Assistance with technical questions

- Technical support for all questions relating to electrics and mechanics
- Telephone support in the event of malfunctions on the construction site



Calculation of standard anchoring forces

- Technical information on adjacent anchoring forces and on ground pressure



Comprehensive spare parts service

- Well-qualified specialists for expert spare parts advice, acceptance of orders and delivery service



High degree of spare parts availability

- We ensure the availability of our spare parts for at least 10 years



Fast delivery

- For orders received by 16.00 hours same-day shipment is possible, depending on destination, shipment type and order scope



ASSEMBLY WORK



Planning and implementation of field staff deployments

- GEDA is on the side of its customers when it comes to performing repairs, accident prevention (UVV) tests and technical inspection (TÜV) tests
- Alignment of individual customer requirements is always the focus - this also includes the avoidance of long wait times



Reliable service - worldwide

- Our customers, whether on oil platforms, in refineries or in explosion-protected areas etc., can also rely on GEDA service when environmental conditions are tough such as extreme cold or high dust accumulation



On-site instruction and technical support

- Professional instruction and support attuned to customer needs provided by qualified GEDA service technicians



External service partners

- Customer proximity is our focus: GEDA is represented worldwide through skilled professional dealers who are also responsible for service in their local areas

TRAINING SEMINARS



The current training programme

- Update your GEDA product knowledge here! We offer an extensive training programme for the assembly and service staff of our dealers and for our end customers
- Training courses can be delivered both in Germany and abroad and in different languages. Therefore, the perfect combination of theory and practice!

You can find the current training programme at:
www.geda.de/en/service





CUSTOMER SERVICE



Repair and maintenance in the Service Centre

- GEDA specialists perform all repairs and service specialists undertake service and maintenance work
- Processing of technical inspection (ZÜS) acceptances



Maintenance contracts

With a maintenance contract we guarantee you regular maintenance of which there are many benefits:

- Guarantee of the safe working condition of the system, also between the expert inspections
- Reduction of faults which saves on breakdown and repair costs
- Optimisation of operational safety and retention value of the system

We will be pleased to offer you a maintenance contract attuned to your customised requirements



Trade-in of old devices

- When you purchase a new device we and our partners will be pleased to provide you with a quote for the trade-in of your old device

BATTERY LINE

SPECIAL PRODUCTS







Wireless operation with convenient radio remote control


Extremely short assembly time of only approx. 5 minutes

Cost-efficient – starting from the first floor

3-in-1 stepladder, lean-to ladder and LIFTLadder

Fast charging times – 100% recharged after approx. 2 hours

WLAN/mobile app control possible









The world innovation! The GEDA BatteryLadderLIFT

The GEDA BatteryLadderLIFT is the newcomer among the compact material hoists: it conveniently transports any materials along the façade, without annoying tangled cables, and it is quick and easy to install. Whether refurbishment projects or a new build sites, tilers, painters, window installers, joiners, removal firms or DIYers – there is virtually no limit to the possible applications.


Assembled by only one person in less than five minutes, the compact innovation from GEDA uses a powerful 24 V/10 Ah Li-ion battery drive and different platforms to transport all types of materials up to 120 kg. At the press of a button, the convenient radio remote control sets the compact device in motion from 0 to 15 m/min.

Any height from 2.2 m to 10 m can easily be reached through a clever combination of the stepladder and/or lean-to ladder with the convenient ladder joining kit. Even when the GEDA BatteryLadderLIFT is not needed, the versatile robust ladder with type approval can be used as a traditional construction site ladder.

Technical data:

	120 kg
	10 m
	15 m/min
	24 V/10 Ah

**Only a few parts and
toolless assembly!**

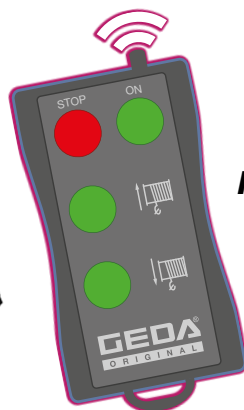

Load platforms:



Load platform Basic
Art. No. 65310



Load platform Standard
Art. No. 65320



Load platform Premium
Art. No. 65330

Remote radio control standard

WLAN control via mobile app



Apple and the Apple logo are trademarks of Apple Inc., registered in the U.S. and other countries.
App Store is a service mark of Apple Inc., registered in the U.S. and other countries.
Google Play and the Google Play logo are trademarks of Google Inc.

GEDA LIFTLadder:



GEDA LIFTLadder 4500
Art. No. 65210



GEDA LIFTLadder 2400
Art. No. 65220



Ladder connector
Art. No. 65230

Lifting height 2.2 - 2.4 m



1 x GEDA LIFTLadder 2400

Lifting height 2.2 - 6.8 m



1 x GEDA LIFTLadder 4500
1 x GEDA LIFTLadder 2400
1 x Ladder connector

Lifting height 2.2 - 10 m



2 x GEDA LIFTLadder 4500
1 x GEDA LIFTLadder 2400
2 x Ladder connector

Accessories:



Li-Ion Battery 24V/10 Ah
Art. No. 65420



Battery charger 3,0 A
Art. No. 65430



Head section
Art. No. 65410



Limit rod
Art. No. 65450



Transport case +
Art. No. 65470

**For further accessories
visit: www.geda.de**







ROPE HOISTS

TEMPORARY INSTALLATIONS

SPECIAL PRODUCTS

GEDA® STAR 200 STANDARD STAR 250 COMFORT



**Lightweight swivel arm
hoist**

**Easy material transport
even under difficult
conditions**

**Assembly can be
conducted by one person**

**Versatile attachment
options**

**Variety of load handling
devices**





GEDA STAR

Construction workers from all sectors have known and appreciated the benefits of the GEDA Star hoists for decades. Whether new build projects or renovation work: the versatile rope hoists impress with high load capacities and very easy material transport, even under difficult conditions. The extensive range of different load handling devices such as bucket holders, plate grabbers or rock baskets allow the rope hoists of the GEDA Star series to be ideally adapted to the requirements on site.

One particularly convenient feature is that the compact devices can be installed in any location at the scaffolding, in a window, between stories or on the roof. The electric winch can be separated from the swivel arm, allowing installation by one person.

GEDA® STAR 200 STANDARD



Technical data:



200 kg



25/50 m



22 m/min



**1 kW/230 V/
50 Hz/16 A**

GEDA® STAR 250 COMFORT



Technical data:



250 kg



25/50 m



28 m/min



**1 kW/230 V/
50 Hz/16 A**



GEDA STAR

For easy material transport even under difficult conditions

Versatile fixing devices:



Scaffold clamp

Convenient scaffold clamp for 1½" tubular scaffolds

Art. No. 01860



Floor to ceiling tie

Floor to ceiling tie, telescopic from 230 - 325 cm, (swivel arm adjustable in height) for narrow windows, stairwells, etc

Art. No. 01862




Tripod

Free-standing tripod with ballast container for flat roofs and open floors

Art. No. 01863

Landing level safety gates:

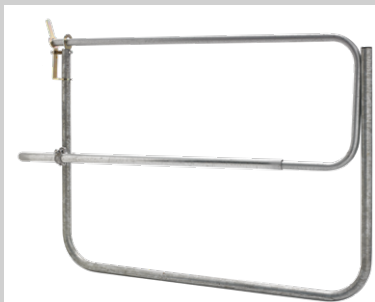

Simple


Art. No. 01206



ECO S

Art. No. 42500

Accessories/Load carrying devices:

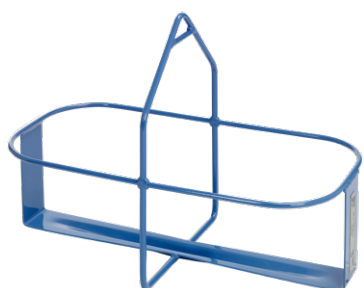

Bucket hanger for 2 buckets
Art. No. 01810



Bucket hanger for 4 buckets
Art. No. 01811



Bucket ring for 4 buckets
Art. No. 01812



Tipping container 35 l
Art. No. 01813



Tipping container 65 l
Art. No. 01814



Mortar skip 65 l
Art. No. 01815



Brick cage
Art. No. 01816



Chain sling for wheelbarrow
Art. No. 01817




Board lifting frame
Art. No. 01819



Delivery cage
Art. No. 01820

For further accessories
visit: www.geda.de



GEDA® MINI 60 S MAXI 120 S MAXI 150 S



Fast and safe material transport



Fast assembly

Ideal for scaffolders, decorators and façade specialists

Comprehensive safety features

Variety of load handling devices



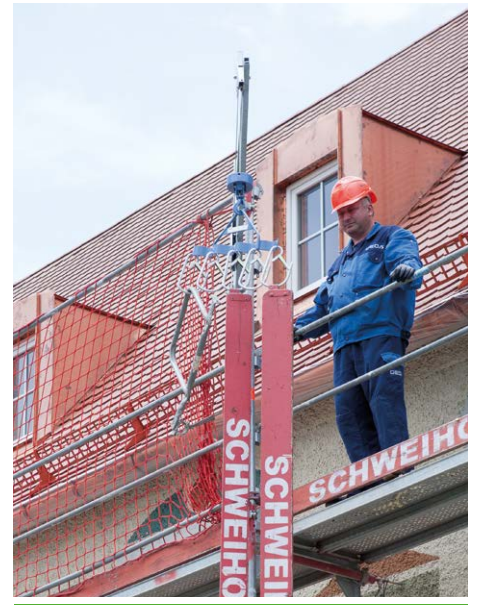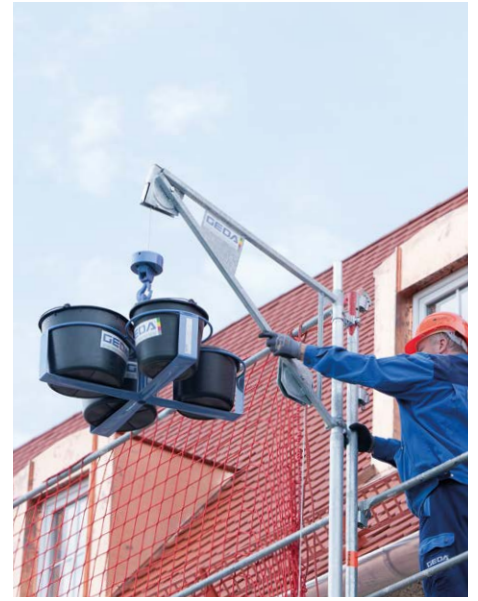

GEDA MINI / MAXI

With two lifting speeds, easy assembly and extensive safety features, the convenient rope hoists from the GEDA Mini/Maxi range are the ideal helpers for efficient, yet safe transport of scaffolding elements and construction materials.

The manual drive of the rope drum is not transported upwards, but simply fastened to the scaffolding at the bottom, while the lightweight swivel arm is attached at the top of the scaffold at the desired height. This even allows quick and easy relocation of the rope hoists during different construction phases.

A broad selection of accessories and load handling devices turns the compact rope hoists into true all-round talents at construction sites. Whether bulky scaffolding elements, loaded wheelbarrows, buckets or other construction materials – the GEDA rope hoists from the Mini/Maxi range have been known in the construction industry for decades and ensure easy and efficient material transport at the press of a button.

GEDA® MINI 60 S



Technical data:



60 kg



40/70 m



23/69 m/min



**0.25/0.75 kW/
230 V/50 Hz/16 A**

GEDA® MAXI 120 S



Technical data:



120 kg



40/70 m



20/60 m/min



**0.45/1.35 kW/
230 V/50 Hz/16 A**

**110 V-version
also available!**

GEDA® MAXI 150 S



Technical data:



150 kg



40/70 m



15/45 m/min



**0.45/1.35 kW/
230 V/50 Hz/16 A**

**Want double payload?
Take it easy with GEDA!**

Increase the load capacity of your GEDA MAXI 150 S only with a few accessories.*



Swivel arm (300 kg)

Art. No. 01272



Pulley block (300 kg)

Art. No. 01273



Additional weight

Art. No. 56956

*The technical data of the GEDA MAXI 150 S change as follows:
Load capacity 300 kg; Lifting height 16/26 m; Lifting speed 7/21 m/min

GEDA® MINI / MAXI

SAFETY FEATURES:

GEDA MINI / MAXI

The quick and safe hoist for transporting material on a scaffold



Easy placement of the rope on the swivel arm without having to dismantle the rollers



An integrated limit switch turns it off on reaching the swivel arm, when overloaded or caught on the scaffold.



The motor stops when the rope slackens; the rope remains tight on the drum

Swivel arm:



Swivel arm


Art. No. 05711



Swivel arm support

Art. No. 29497

Landing level safety gates:

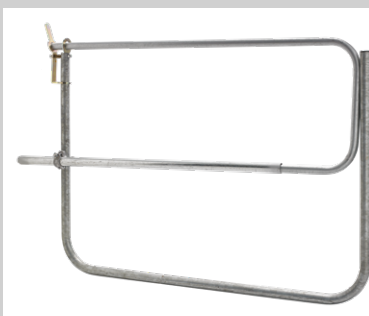

Simple

Art. No. 01206



ECO S

Art. No. 42500

Accessories/Load carrying devices:



Hook
Art. No. 01408



Hook tie for 5 hooks
Art. No. 01827



Rope
Art. No. 03066



Bucket ring for 4 buckets
Art. No. 01812




Tipping container 65 l
Art. No. 01814



Mortar skip 65 l
Art. No. 01815



Lifting sling
Art. No. 01432



Bucket hanger for 2 buckets
Art. No. 01810



Bucket hanger for 4 buckets
Art. No. 01811



Brick cage
Art. No. 01816



Chain sling for wheelbarrow
Art. No. 01817



Board lifting frame
Art. No. 01819



Delivery cage
Art. No. 01820



Transport trolley
Art. No. 47760



Padlock
Art. No. 01429

For further accessories
visit: www.geda.de



GEDA®

LIFT 200 STANDARD

LIFT 250 COMFORT

FIXLIFT 250



Proven a thousand times over – the ideal transport helper at the construction site

Easy assembly without tools

Robust workmanship

Comprehensive safety features

Variety of load handling devices





GEDA LIFT

Fast and easy installation without tools, the robust workmanship, the small footprint and the versatile application options of the GEDA LIFT have already been popular with craftspeople from all sectors for decades. There is a reason why more than 85,000 items of the traditional product from GEDA have already been sold.

Special accessories enable virtually all types of materials to be transported upwards to the roof and into the building. Whether for bricklayers, interior fitters, roofers, tilers or floor installers, the GEDA LIFT has the right load handling devices for any construction material and any application.

Three different lift options with lifting speeds up to 38 m/min are available to suit the conditions at the construction site. An AC power connection is sufficient to transport materials up to 250 kg. The load capacity depends on the design of the aluminium ladder sections, the inclination and the rail length.

GEDA® LIFT 200 STANDARD



Technical data:



200 kg



19 m



25 m/min



**1 kW/230 V/
50 Hz/16 A**

GEDA® LIFT 250 COMFORT



Technical data:



250 kg



19 m



30 m/min



**1.3 kW/230 V/
50 Hz/16 A**

**110 V-version
also available!**

GEDA® FIXLIFT 250



Technical data:



250 kg



19 m



19/38 m/min



**0.6/1.2 kW/230 V/
50 Hz/16 A**

*The flexible
GEDA LIFT
system!*



Accessories/Load carrying devices:



Ladder section 2 m 200 kg
Art. No. 03378



Ladder section 1 m 200 kg
Art. No. 03379



Ladder section 2 m 250 kg
Art. No. 02888



Ladder section 1 m 250 kg
Art. No. 02889




Ladder prop
Art. No. 05643



General purpose platform
Art. No. 02893



Front protector for general purpose platform
Art. No. 02862

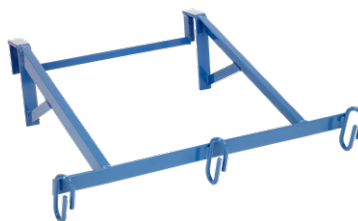

Bucket hanger
Art. No. 02817



Vario platform
Art. No. 02895



Rigid platform
Art. No. 02253



Tile holder
Art. No. 02860



Sheet carrier
Art. No. 02831

Accessories/Load carrying devices:



Prop for sheet carrier
Art. No. 02812



Tipping skip with tipping attachment
Art. No. 02818



Angle track section
Art. No. 02877



Angle track section
Art. No. 02828



Wheeled undercarriage
Art. No. 02822



Roof tile batten trolley
Art. No. 02884



Roof tie
Art. No. 02826



Transport axle
Art. No. 02886



Tilting trolley
Art. No. 02855



Tipping skip (for tilting trolley only)
Art. No. 02856



Liftbox
Art. No. 46309

For further accessories
visit: www.geda.de



**Versatile
application
possibilities!**

GEDA® LIFT

► **powerful**

► **fast**

► **efficient**



GEDA®

ORIGINAL

Profitable
even at
low lifting
heights!

Saves time!

Protects
your health!

Saves costs!

GEDA® REMOVAL HOIST



GEDA REMOVAL HOIST

The GEDA Removal Hoist puts an end to cumbersome carrying of bulky furniture or heavy moving boxes through small staircases.

Three different variants are available, which can be used individually depending on the situation on site. The transport professional is available in the following versions: "GEDA Removal Hoist 200 Standard", "GEDA Removal Hoist 250 Comfort" and "GEDA Removal Hoist 250 Perfect".

Depending on the type, the hoist transports up to 250 kg quickly and safely up to a maximum height of 18.3 m.

All models have a small footprint – during transport and during use. Narrow pavements or tight courtyards are no problem for the GEDA removal lift.

If particularly delicate pieces of furniture or removal goods have to be transported, we recommend using the "GEDA Removal Lift 250 Perfect". The hoist is equipped with a special soft start feature which ensures particularly gentle transport.

Technical data:



250 kg



18.3 m



0-15-30 m/min



**1.5 kW/230 V/
50 Hz/16 A**

Accessories/Load carrying devices:



Ladder section 2 m 250 kg
Art. No. 02888



Ladder section 1 m 250 kg
Art. No. 02889



Height-adjustable foot section
Art. No. 11295



Angle track section
Art. No. 02828



Ladder prop
Art. No. 05643



Support bar
Art. No. 03394



Rigid platform
Art. No. 02253



Rotating platform
Art. No. 18722



Head section support
Art. No. 10061



Head section with control
Art. No. 19770



Assembly arm
Art. No. 02205

**For further accessories
visit: www.geda.de**



GEDA® SOLARLIFT



GEDA SOLARLIFT

The GEDA Solarlift gently transports highly-sensitive solar elements and photovoltaic modules quickly and safely to the roof. The specially designed solar platform ensures careful transport of the valuable modules and holds the sensitive cargo safely in place.

The GEDA Solarlift also scores when it comes to transport and storage. It can easily be transported to its deployment site as the components can be dismantled into individual pieces. Once at the construction site, the device impresses with quick and easy assembly without additional tools and the small size of the compact base unit means that it can be installed even at sites with difficult access conditions.

In addition to the single-level variants GEDA Lift 200 Standard and GEDA Lift 250 Comfort, the two-level GEDA Fixlift 250 is also available.

The load capacity in each case depends on the design of the aluminium ladder sections, the inclination and the rail length.

Technical data:



250 kg



19 m



19/38 m/min



**0.6/1.2 kW/230 V/
50 Hz/16 A**

Accessories/Load carrying devices:



Ladder section 2 m 200 kg
Art. No. 03378



Ladder section 1 m 200 kg
Art. No. 03379



Ladder section 2 m 250 kg
Art. No. 02888



Ladder section 1 m 250 kg
Art. No. 02889



Ladder prop
Art. No. 05643



General purpose platform
Art. No. 02893



Front protector for general purpose platform
Art. No. 02862



Solar platform
Art. No. 02908



Sheet carrier
Art. No. 02831




Angle track section
Art. No. 02877



Angle track section
Art. No. 02828



Wheeled undercarriage
Art. No. 02822



Roof tie
Art. No. 02826



Transport axle
Art. No. 02886



Liftbox
Art. No. 46309

**For further accessories
visit: www.geda.de**







RACK AND
PINION HOISTS

MATERIAL HOISTS

TEMPORARY INSTALLATIONS

SPECIAL PRODUCTS

GEDA® 200 Z


Ideal for scaffolders and construction workers

Lightweight platform – only 44 kg

Easy, fast assembly

Platform swivels 90° to both sides

Space-saving loading and unloading parallel to the building/scaffolding





GEDA 200 Z

The compact and lightweight GEDA 200 Z is the ideal helper for scaffolders and construction workers. At the place of use, it impresses with easy setup directly from the platform and with its very small footprint: The patented quick lock system of the ladder sections replaces complicated threaded connections and allows quick and easy assembly of the device. The base unit and the platform of the GEDA 200 Z require an area of only 1.5 x 1.5 m on the ground, allowing loading of the platform (which weighs only 44 kg) parallel to the building without problems. As the platform can be swivelled to the right and left by 90 degrees, unloading at the different landing levels is also perfectly easy.

With a load capacity of 200 kg and a lifting speed of 25 m/min, the GEDA 200 Z achieves a lifting height of up to 35 m. The material hoist is designed to be easy to maintain and repair, ensures rapid scaffolding setup and provides smooth and efficient material transport at construction sites.

Technical data:



200 kg



35 m




25 m/min



**1.7 kW/230 V/
50 Hz/16 A**

Platform:

Ideal for scaffolders and construction workers

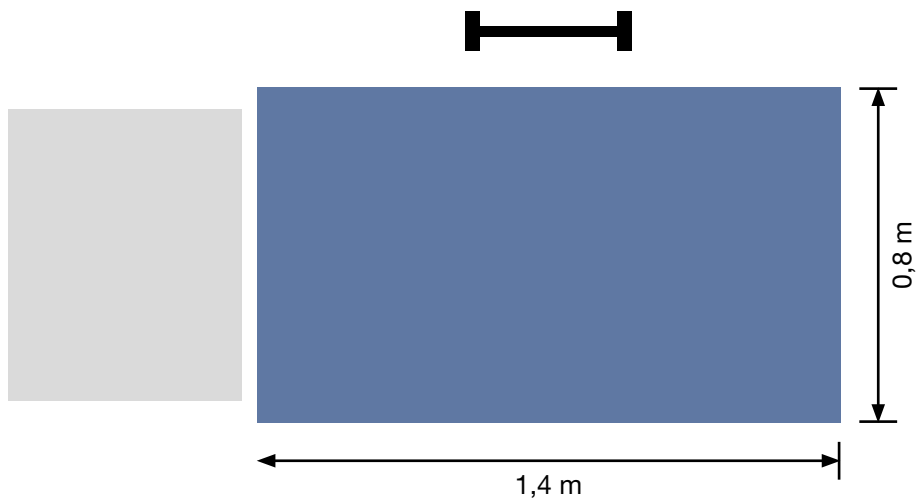

GEDA 200 Z swivel platform

1 loading and unloading ramp

Accessories:

For a wide range of
accessories visit:
www.geda.de




Landing level safety gate:




ECO
Art. No. 38500


Space requirements:

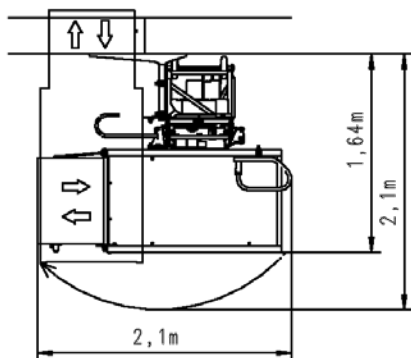

Normal space requirement in front of a wall

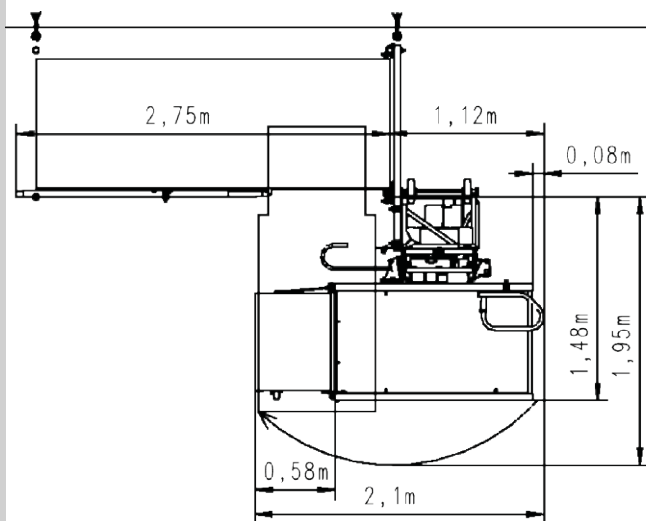

Normal space requirement in front of a scaffold

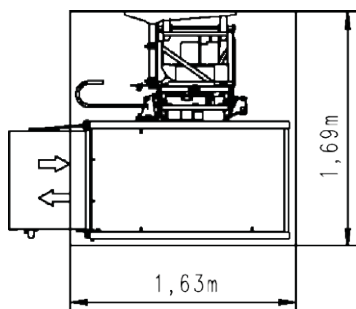

Shaft dimensions



GEDA® 300 Z

The spacious transport helper at the construction site

Ideal for transporting scaffolding parts

Convenient loading and unloading

Platform swivels 90° to one side

Lightweight aluminium mast – can be assembled by one person









GEDA 300 Z

Whether scaffolding elements, tools or other construction materials: The GEDA 300 Z is the compact and robust partner for efficient material transport at construction sites. The lightweight 2-m aluminium mast elements can be assembled by one person.

The convenient loading and unloading ramp ensures comfortable access to the platform, which is approved for transporting up to 300 kg. Once at the landing level, the car of the GEDA 300 Z, which can be swivelled by 90 degrees, allows a safe transition and comfortable loading and unloading.


The GEDA 300 Z is available in a 230 V or a 400 V version and can therefore be adapted ideally to the power supply at the construction site.

Technical data:

	300 kg
	50 m 100 m
	20 m/min 30 m/min
	1.8 kW/230 V/50 Hz/16 A 2.5 kW/400 V/50 Hz/16 A

Platform:

The compact hoist on site!

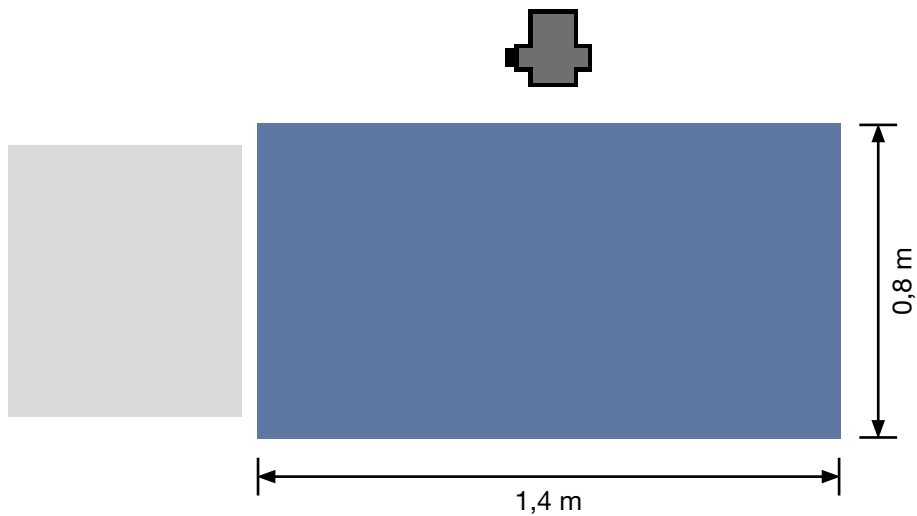


GEDA 300 Z swivel platform

1 loading and unloading ramp

Accessories:

For a wide range of
accessories visit:
www.geda.de




Landing level safety gate:




ECO
Art. No. 38500


Space requirements:

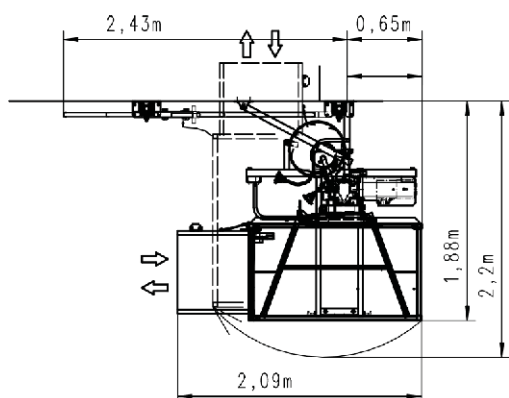

Normal space requirement in front of a wall

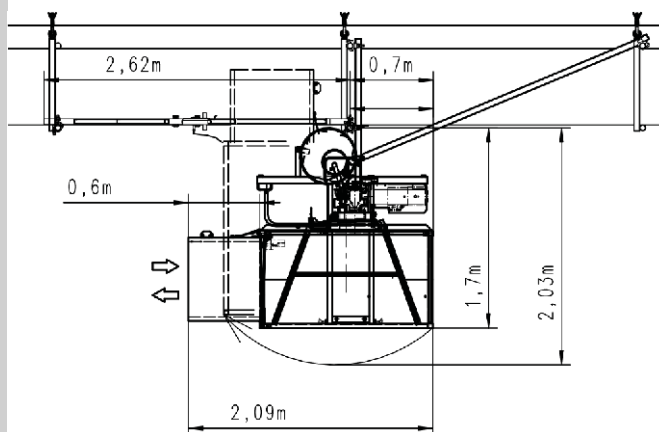

Normal space requirement in front of a scaffold

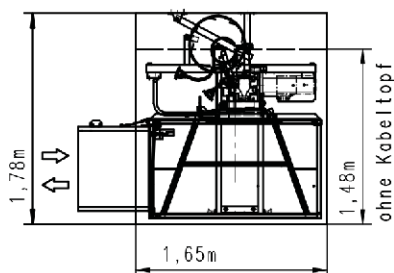

Shaft dimensions



GEDA® 500 Z




Powerful material hoist

GEDA UNI-X-MAST system

**Ideal for transporting all
types of construction
materials**

**Convenient loading and
unloading**

**Platform swivels 90° to
one side**





GEDA 500 Z

Thanks to its robust design, the GEDA 500 Z braves the often rough conditions at construction sites and has proven itself as a reliable transport helper over many years.

With its spacious platform, the powerful material hoist offers sufficient space for heavy, bulky construction materials up to a weight of 500 kg, and moves its freight up to 100 m height at 30 m/min.

The platform of the GEDA 500 Z can be swivelled by 90 degrees, which allows safe and comfortable loading and unloading at the respective landing levels. At the ground station, items can be loaded parallel to the building, which saves space.

A patented single-axle trailer for transport and for automatic set-down and loading of the hoist is available from the accessories range.

Technical data:



500 kg



100 m




30 m/min



**5.5 kW/400 V/
50 Hz/16 A**

Platform:

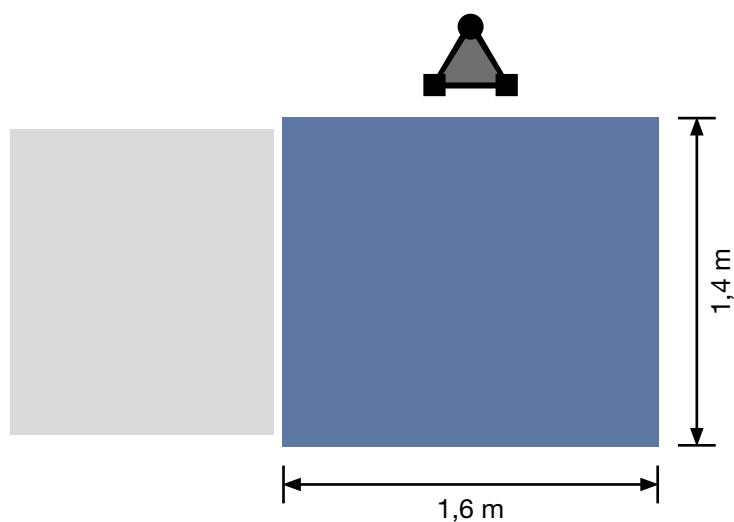

GEDA 500 Z swivel platform

1 loading and unloading ramp

Accessories:

For a wide range of
accessories visit:
www.geda.de




Landing level safety gate:




ECO +
Art. No. 39700


Space requirements:

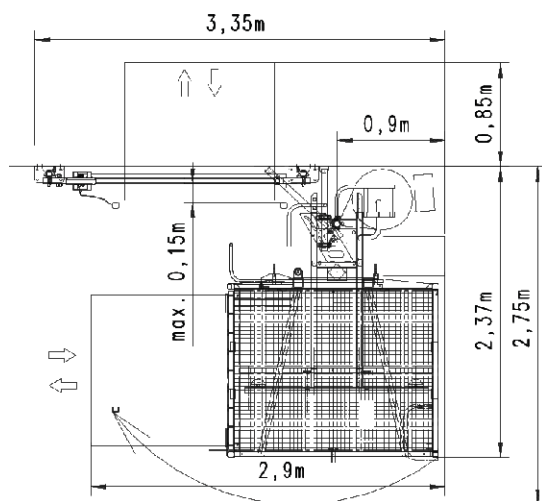

Normal space requirement in front of a wall

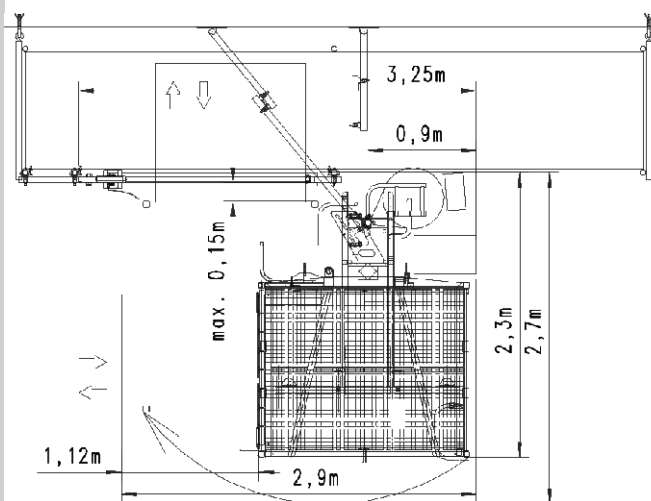

Normal space requirement in front of a scaffold

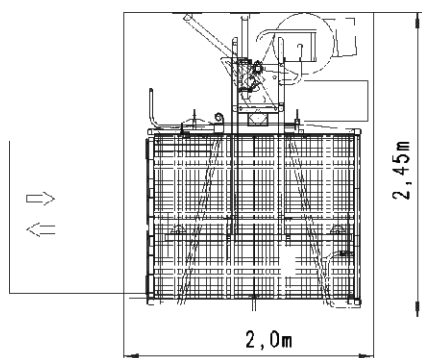

Shaft dimensions

GEDA® 500 Z DUO




Powerful material hoist

GEDA UNI-X-MAST system

Ideal for transporting all types of construction materials

Can be used as a move-through platform and as a swivel platform

Convenient loading and unloading





GEDA 500 Z DUO

The GEDA 500 Z DUO material hoist differs from its "little brother", the GEDA 500 Z, in one additional feature: The platform of the 500 Z DUO can be used as a move-through platform and as a swivel platform. This function means that the material hoist can be adapted to the individual situation at the construction site even better.

The convenient loading and unloading ramp ensures comfortable access to the platform, which is approved for transporting up to 500 kg. Once at the landing level, the car of the GEDA 500 Z DUO, which can be swivelled by 90 degrees, allows a safe transition and comfortable loading and unloading. At the ground station, items can be loaded parallel to the building, which saves space.

A patented single-axle trailer for transport and for automatic set-down and loading of the hoist is available from the accessories range.

Technical data:



500 kg



100 m




30 m/min



**5.5 kW/400 V/
50 Hz/16 A**

Platform:

Usable as load through and rotatable platform

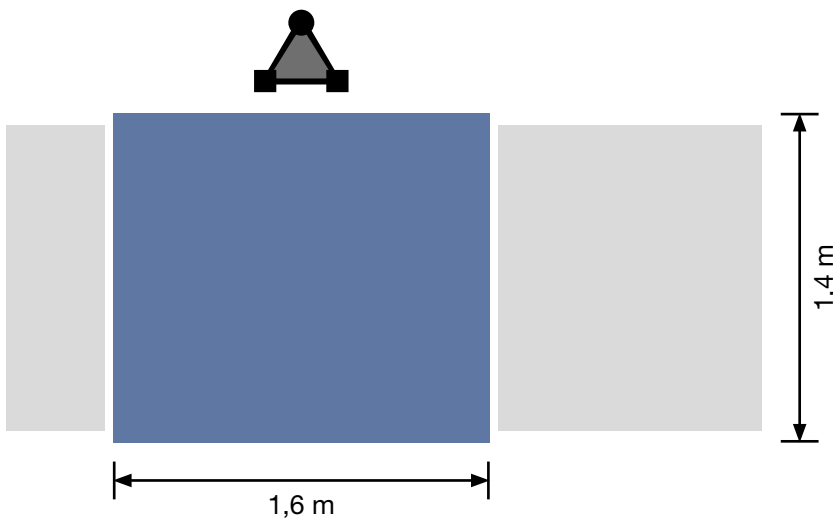

GEDA 500 Z DUO swivel platform 1 loading ramp / 1 unloading ramp

Accessories:

For a wide range of
accessories visit:
www.geda.de



Landing level safety gates:



Standard-Basic
Art. No. 01268



Standard
Art. No. 01217



Comfort
Art. No. 01212



BOLLERHOIST



GEDA 300 Z BOILER HOIST
Power Plant, Großkrotzenburg
Germany

GEDA® 300 Z BOILER HOIST

**Specially developed for
repair and maintenance of
silos, boilers, etc.**

**Complete disassembly
possible**

**Access possible through
manhole (45 cm)**

**Extremely fast
assembly times**

**Lightweight aluminium
mast – can be assembled
by one person**



GEDA® 300 Z BOILER HOIST



GEDA 300 Z BOILER HOIST

When repairing and maintaining silos, blast furnaces, co-generation plants, boilers, etc., every minute and especially every centimetre of space count, since access is only possible through the small manhole (45 cm diameter). This is precisely where the GEDA 300 Z Boiler Hoist comes into its own.

The platform of the pure material hoist can be accessed for loading/unloading and personnel can also travel in the hoist for assembling/dismantling the device. The GEDA 300 Z Boiler Hoist can be completely dismantled into its individual parts and is also popular with customers based on its fast assembly and disassembly: it takes two people only about 40 minutes. All connection cables are fitted with plug-and-socket elements to ensure easy and fast assembly of the rack and pinion hoist.

The wearing rack ensures a long service life and is gentle on the gear unit. For added safety, devices such as the safety gear, safety stop with acoustic warning and overload protection are included as a standard.

Technical data:




300 kg



100 m




25 m/min



**2.2 kW/400 V/
50 Hz/16 A**

GEDA® 300 Z BOILER HOIST

Platform:

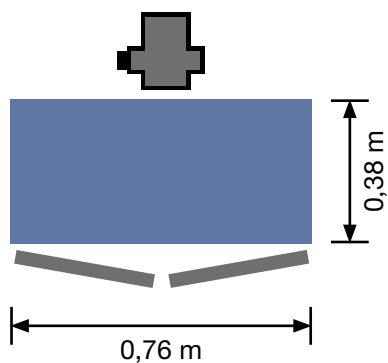

GEDA 300 Z BOILER HOIST

Accessories:

For a wide range of
accessories visit:
www.geda.de



GEDA® 300 Z BOILER HOIST



Completely collapsible!
Access through manholes (45 cm) possible!

GEDA 300 Z/ZP
GEDA 500 Z/ZP
GEDA 1500 Z/ZP
Mainz Cathedral
Germany



RACK AND
PINION HOISTS

TRANSPORT PLATFORMS

TEMPORARY INSTALLATIONS



GEDA® 300 Z/ZP

More information
EN
16719
on page 24/25

**Two devices in one:
material hoist and
transport platform**

GEDA UNI-X-MAST system


**Space miracle:
ideal for use on restricted
construction sites, narrow
driveways or yards**

**Folding working platform
and innovative flat cable
bin**

**Automatic lubrication
device as a standard**

**Break-off safety for flat
cable as a standard**



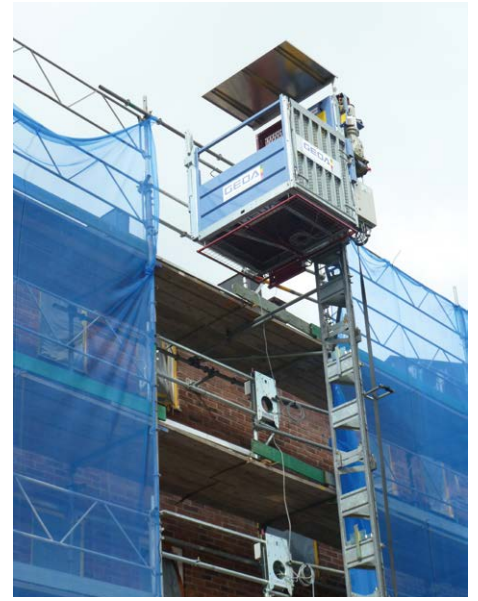

GEDA 300 Z/ZP

The “baby” among the GEDA transport platforms features a range of benefits. When folded, the GEDA 300 Z/ZP is only 0.85 m wide, allowing easy transport to the construction site – even through narrow driveways. With the convenient fork lift pockets, the complete device can easily be transported with a pallet truck or fork lift truck.

Once at the construction site, the GEDA 300 Z/ZP reveals its true size: its compact 1.35 x 0.95 m platform and the flat cable bin can be set up even on the narrowest pavements and in the smallest courtyards.

The two separate controls quickly turn the material hoist into a transport platform which is also approved for transporting up to three passengers.

In addition to the 400 V model, the device is also available as a 230 V version. The 230 V hoist can simply be connected to the existing power supply without requiring a separate high-voltage connection. This is often a great advantage, especially when renovating older buildings.

Technical data:



300 kg/3 persons
500 kg/3 persons



50 m




9 m/min
12 m/min




1.7 kW/230 V/50 Hz/16 A
1.9 kW/400 V/50 Hz/16 A

Platform:

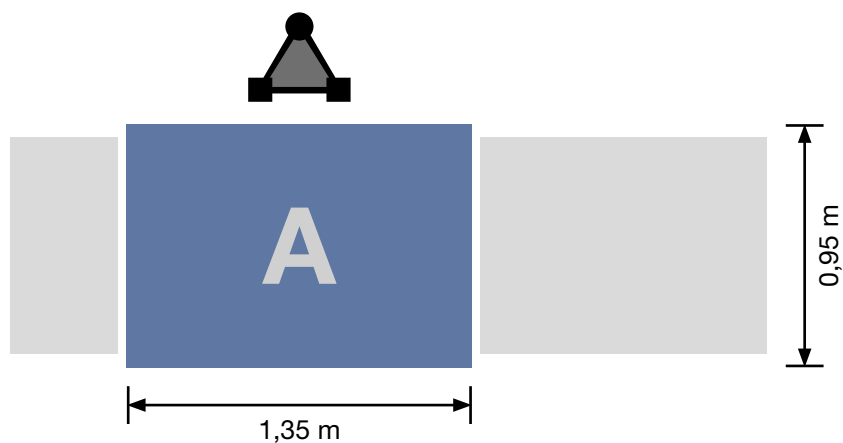

GEDA 300 Z/ZP platform A

1 loading ramp / 1 unloading ramp

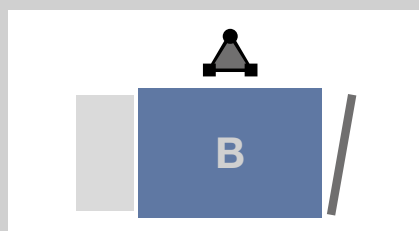

Accessories:

For a wide range of
accessories visit:
www.geda.de



Recommended landing level safety gates:

Tarpaulin retrofit
kit available!



Comfort

Art. No. 01212



Comfort incl. sheet metal panel

Art. No. 68301



VARIO LITE

Art. No. 68200




VARIO/VARIO +

Art. No. 68000;68050


Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel


Space requirements:

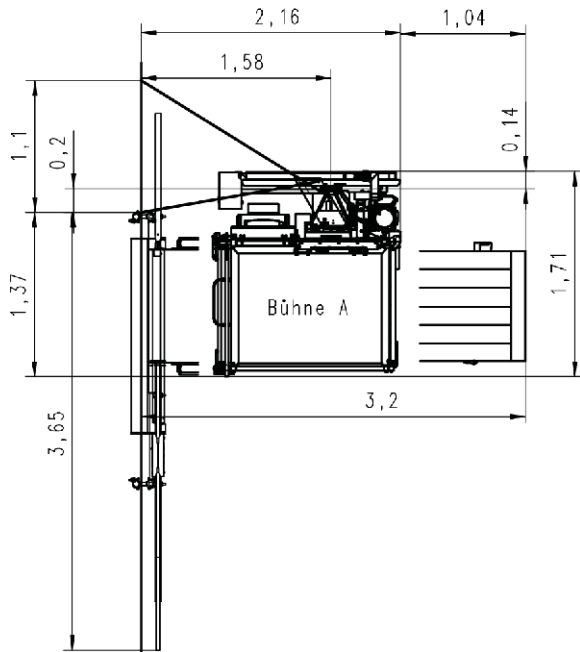


Normal space requirement in front of a wall

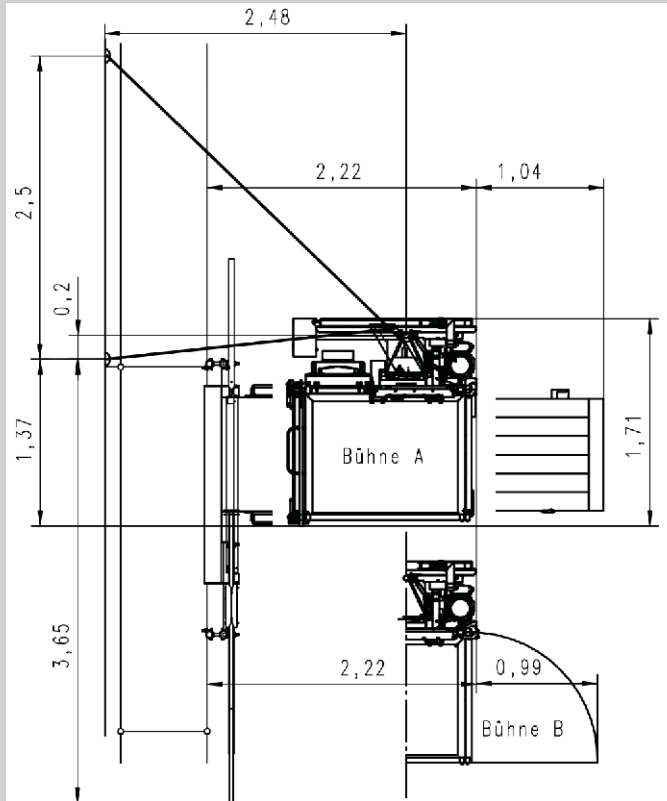

Normal space requirement in front of a scaffold

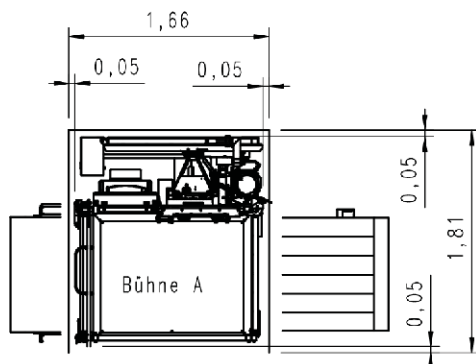

Shaft dimensions (no person transport)

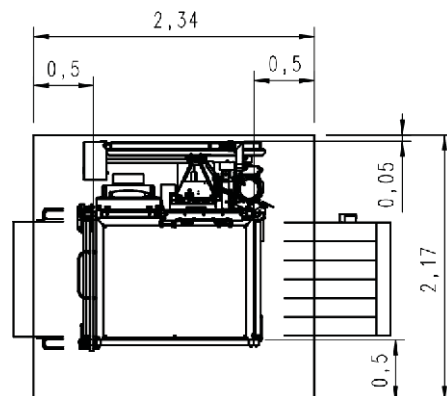

Shaft dimensions (person transport)

GEDA® 500 Z/ZP

More information
EN
16719
on page 24/25

Your powerful partner for heavy loads and efficient working


Two devices in one: material hoist and transport platform

GEDA UNI-X-MAST system

Cost-efficient even at low transport heights

Automatic lubrication device as a standard



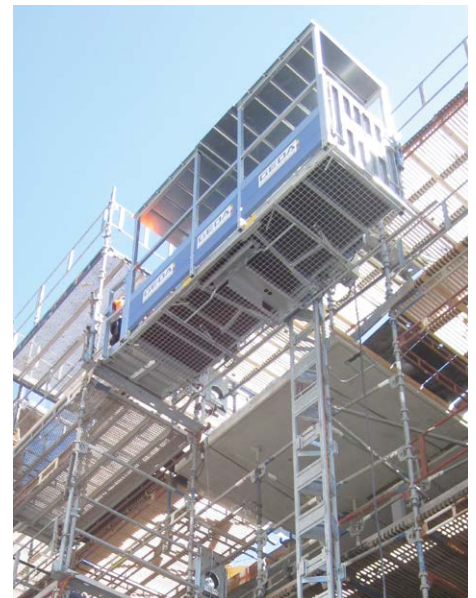

GEDA 500 Z/ZP

The GEDA 500 Z/ZP transport platform has been specifically designed for use in tough building site conditions and is extremely flexible. With two separate controls, it can be used simply as a material hoist or as a transport platform for passengers and materials.

A lifting speed of 24 m/min in material mode and 12 m/min in passenger mode ensures rapid construction progress.

The 500 Z/ZP transport platform is an indispensable aid for rapid assembly of scaffolding as well as for the subsequent work at the construction site. With minimal space requirements, high load capacity and various application options, the construction hoist saves time and ensures optimum logistics processes on site.

Every construction site has its own challenges. Different platform versions with different loading doors and flaps therefore allow optimum adaptation of the GEDA 500 Z/ZP to the requirements on site. The spacious loading platform without cover provides sufficient space for all types of construction materials.

Technical data:




500/850 kg
5 persons



100 m




12/24 m/min



**3.0/6.1 kW/400 V/
50 Hz/16 A**


Platform:

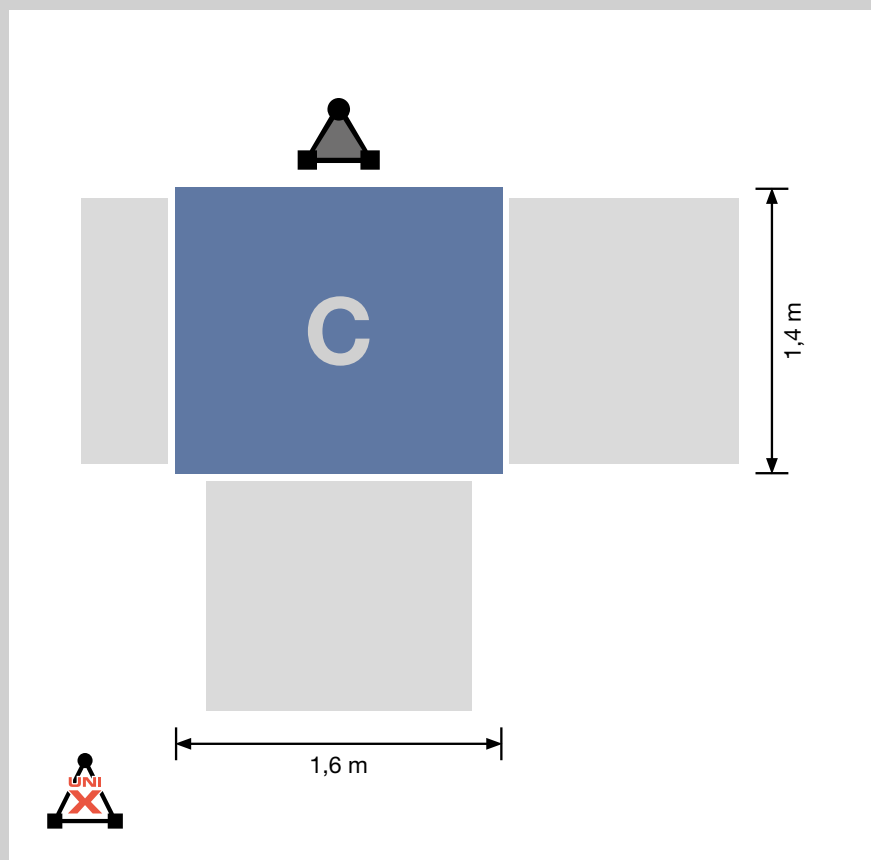

GEDA 500 Z/ZP platform C

2 loading ramps / 1 unloading ramp

**1000 kg
load capacity
also available!**



Accessories:

For a wide range of
accessories visit:
www.geda.de



Recommended landing level safety gates:

**Tarpaulin retrofit
kit available!**



Comfort

Art. No. 01212



Comfort incl. sheet metal panel

Art. No. 68301



VARIO LITE

Art. No. 68200




VARIO/VARIO +

Art. No. 68000;68050


Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel


Space requirements:

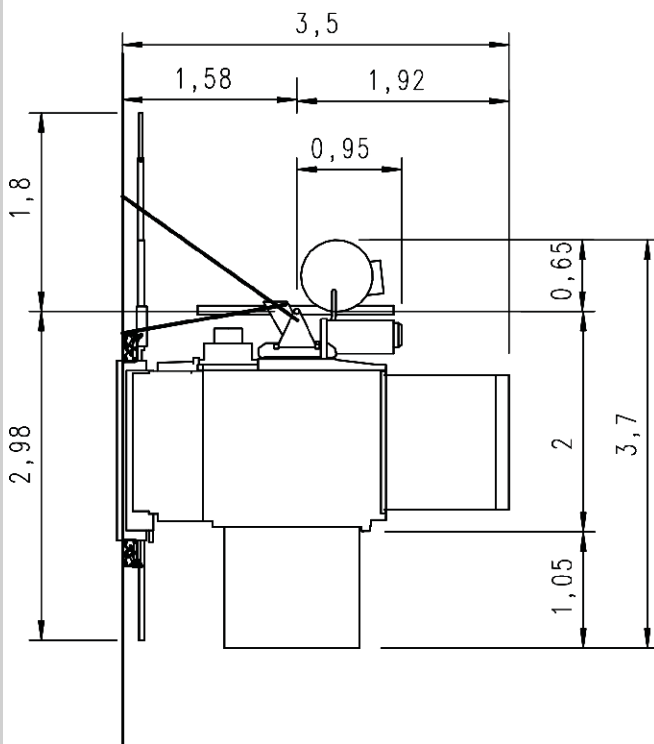


Normal space requirement in front of a wall

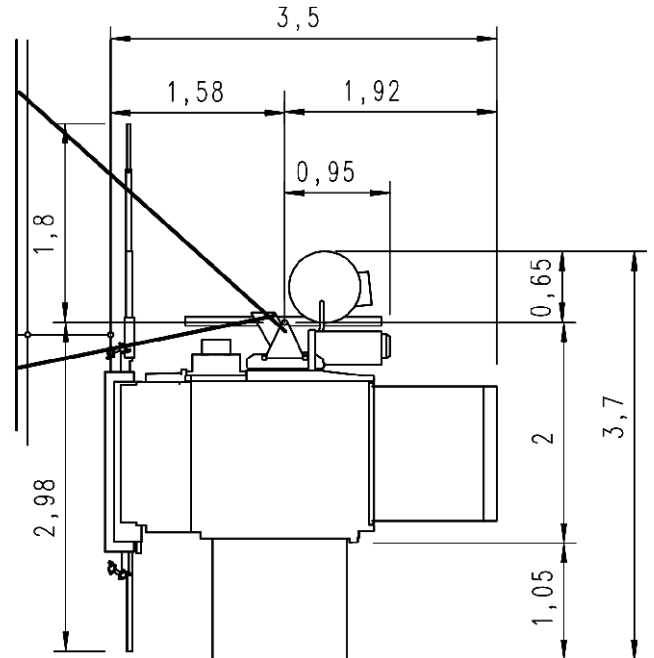

Normal space requirement in front of a scaffold

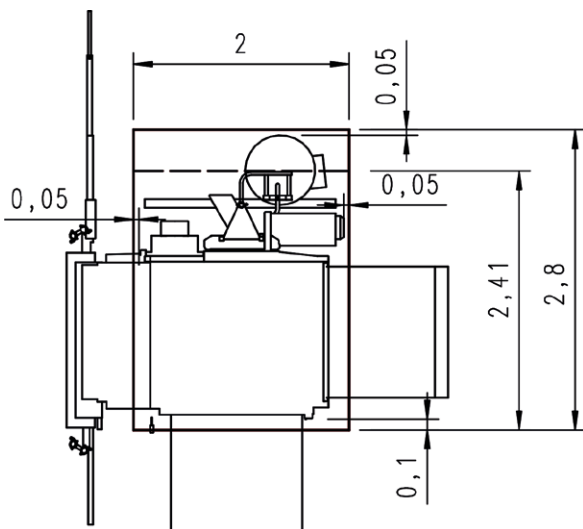


Shaft dimensions (no person transport)

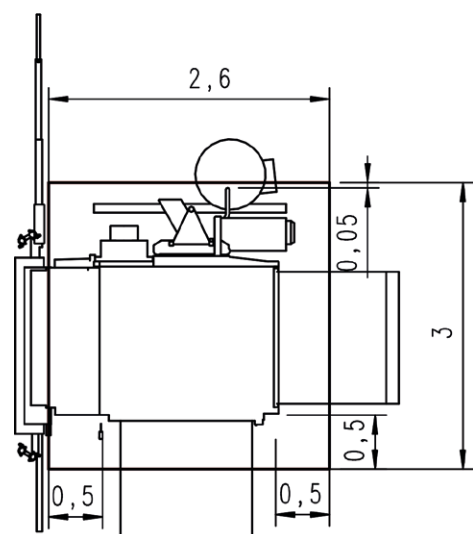

Shaft dimensions (person transport)

Platform:

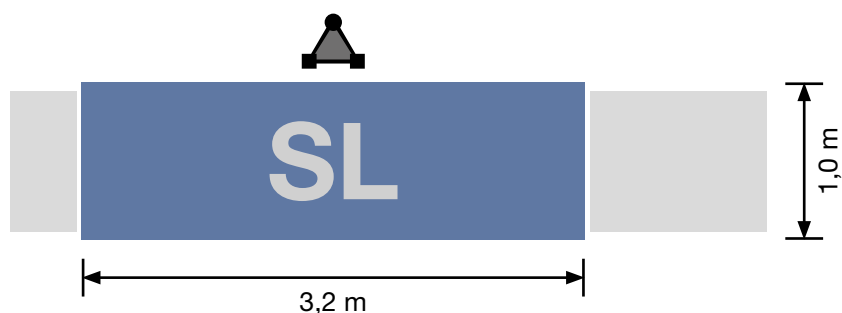

GEDA 500 Z/ZP platform SL

1 loading ramp / 1 unloading ramp

Recommended landing level safety gates:

Tarpaulin retrofit kit available!



Comfort

Art. No. 01212



Comfort incl. sheet metal panel

Art. No. 68301



VARIO LITE

Art. No. 68200




VARIO/VARIO +

Art. No. 68000;68050

Accessories:


For a wide range of
accessories visit:
www.geda.de




Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel


Space requirements:

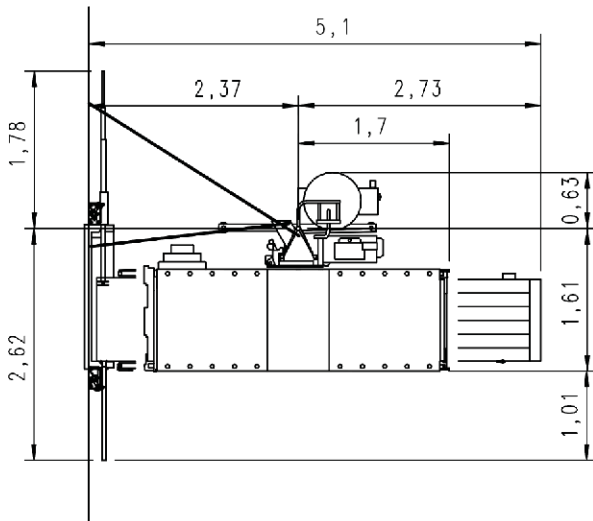


Normal space requirement in front of a wall

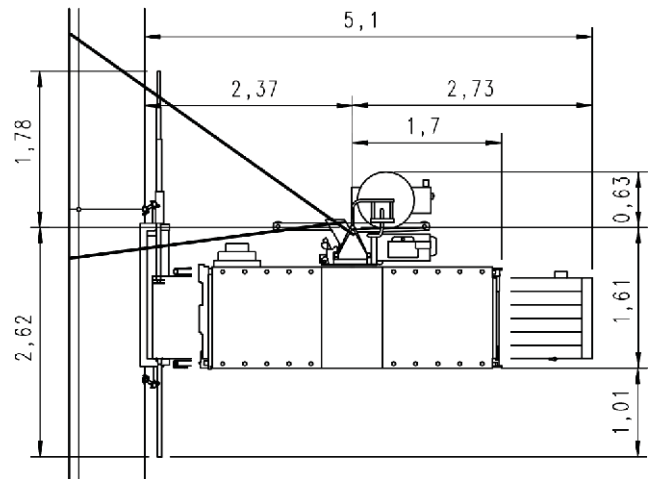

Normal space requirement in front of a scaffold

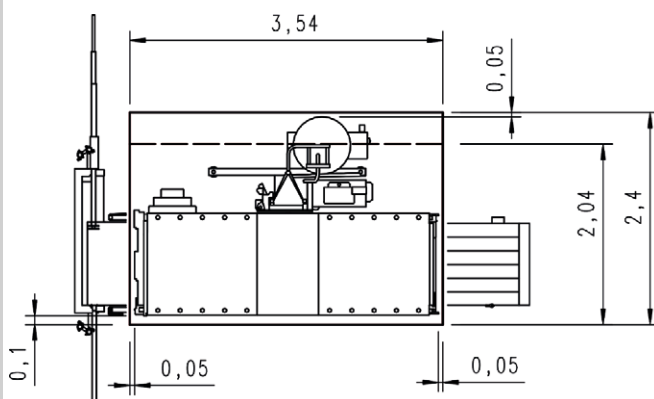

Shaft dimensions (no person transport)

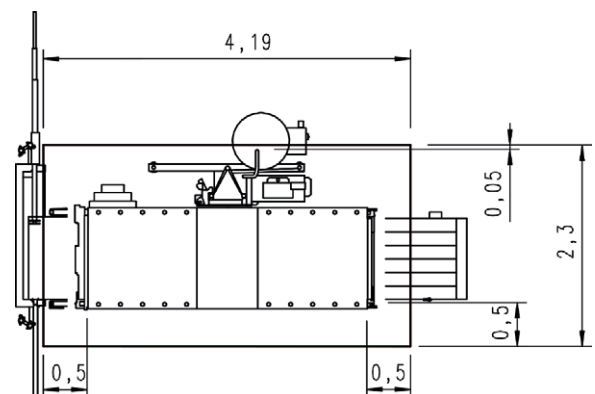

Shaft dimensions (person transport)

GEDA® 1200 Z/ZP

More information
EN
16719
on page 24/25

Your powerful partner for heavy loads and efficient working


Two devices in one: material hoist and transport platform

Large loading volume – allows convenient transport of all types of construction materials

Safe loading and unloading at all landing levels

Automatic lubrication device as a standard



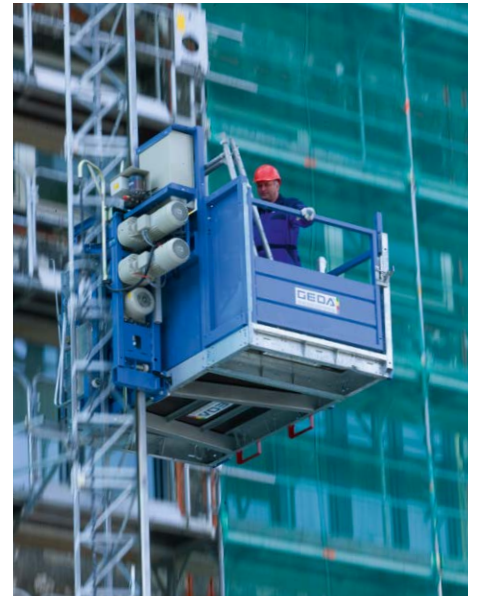

GEDA 1200 Z/ZP

The large loading capacity of the GEDA 1200 Z/ZP transport platform allows quick and safe transport even of bulky and heavy construction materials. With two separate controls, the GEDA 1200 Z/ZP can be used simply as a material hoist with a lifting speed of 24 m/min or as a transport platform for passengers and materials with a lifting speed of 12 m/min.

Various platform modules with different load capacities and sizes offer the right solution for any area of application and any challenge at a construction site.

Despite the high load capacity of up to 1500 kg, the transport platform is guided on only one mast of the proven GEDA VARIO-MAST system.

Technical data:




1500 kg
7 persons



150 m




12/24 m/min



**2 x 3.0/6.1 kW/400 V/
50 Hz/32 A**

Platform:

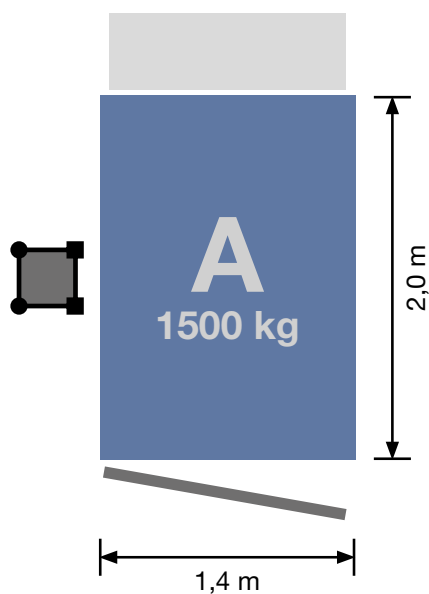

GEDA 1200 Z/ZP platform A

1 loading door / 1 unloading ramp

Recommended landing level safety gates:

Tarpaulin retrofit kit available!



Comfort

Art. No. 01212



Comfort incl. sheet metal panel

Art. No. 68301



VARIO LITE

Art. No. 68200



VARIO/VARIO +

Art. No. 68000;68050

Accessories:


For a wide range of accessories visit:
www.geda.de




Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel


Space requirements:

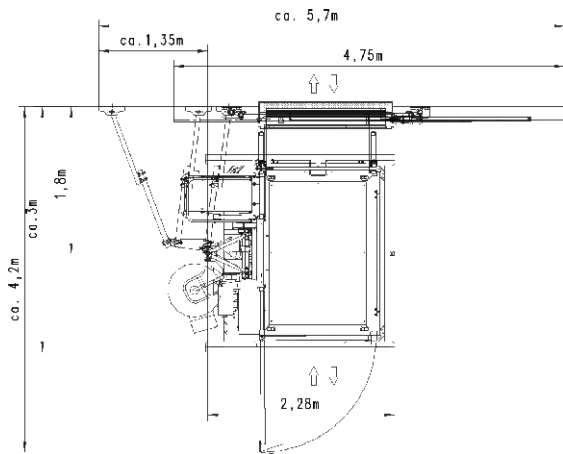

Normal space requirement in front of a wall

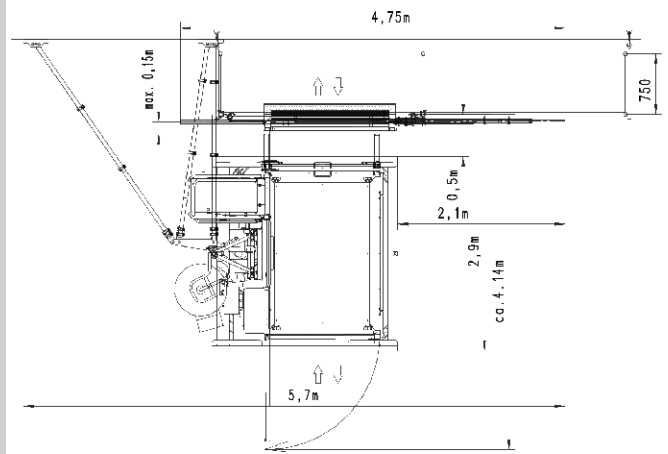


Normal space requirement in front of a scaffold

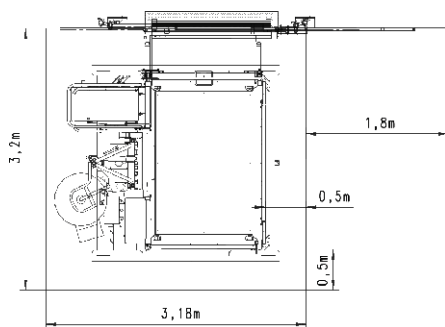

Shaft dimensions (person transport)

Platform:

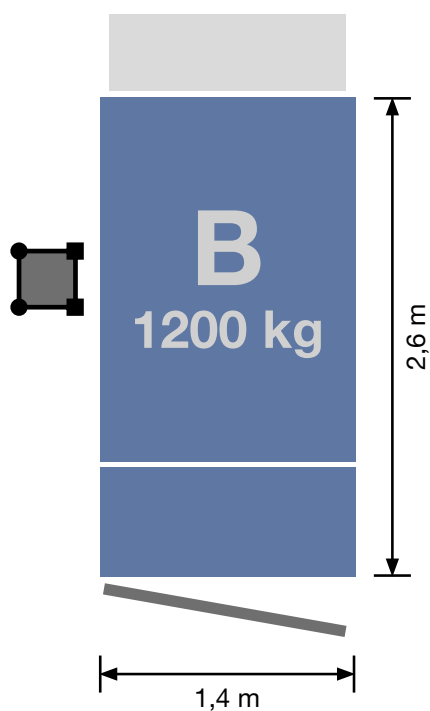

GEDA 1200 Z/ZP platform B

1 loading door / 1 unloading ramp

Recommended landing level safety gates:

Tarpaulin retrofit kit available!



Comfort

Art. No. 01212



Comfort incl. sheet metal panel

Art. No. 68301



VARIO LITE

Art. No. 68200



VARIO/VARIO +

Art. No. 68000;68050

Accessories:


For a wide range of
accessories visit:
www.geda.de




Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel


Space requirements:

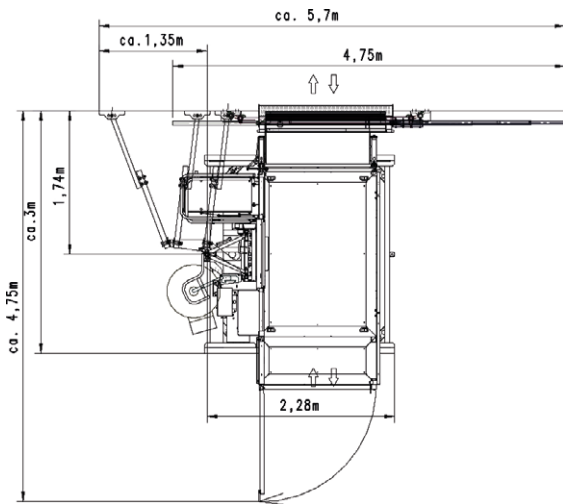

Normal space requirement in front of a wall

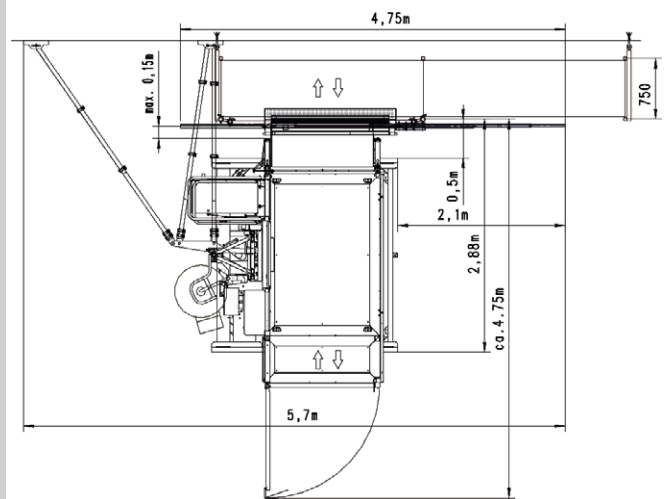


Normal space requirement in front of a scaffold

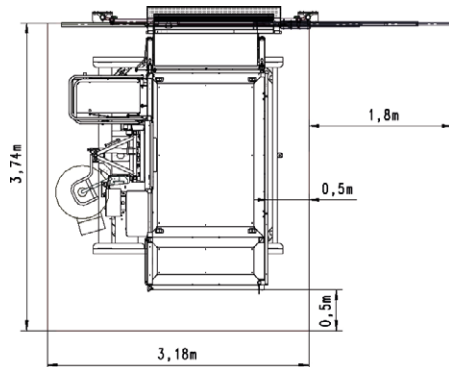

Shaft dimensions (person transport)

Platform:

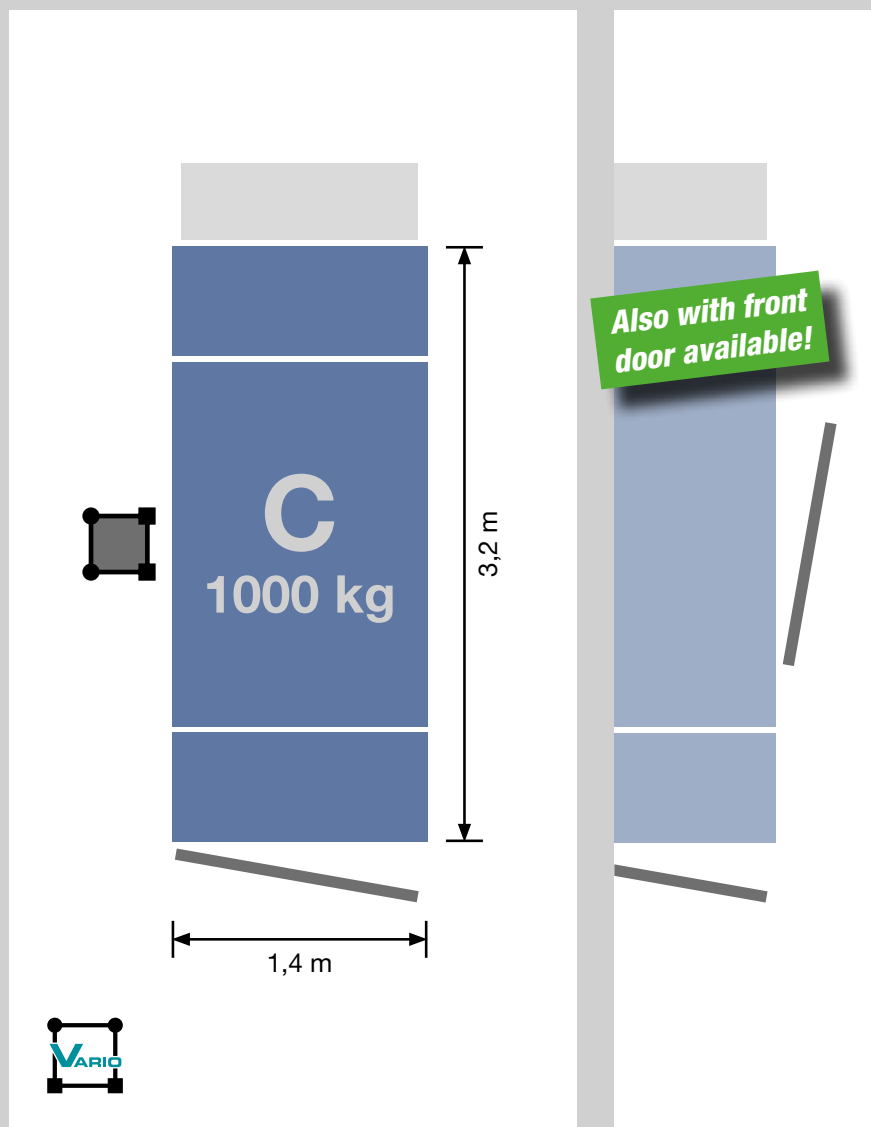

GEDA 1200 Z/ZP platform C

1 loading door / 1 unloading ramp

Recommended landing level safety gates:

Tarpaulin retrofit kit available!



Comfort

Art. No. 01212



Comfort incl. sheet metal panel

Art. No. 68301



VARIO LITE

Art. No. 68200



VARIO/VARIO +

Art. No. 68000;68050

Accessories:


For a wide range of
accessories visit:
www.geda.de




Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel


Space requirements:

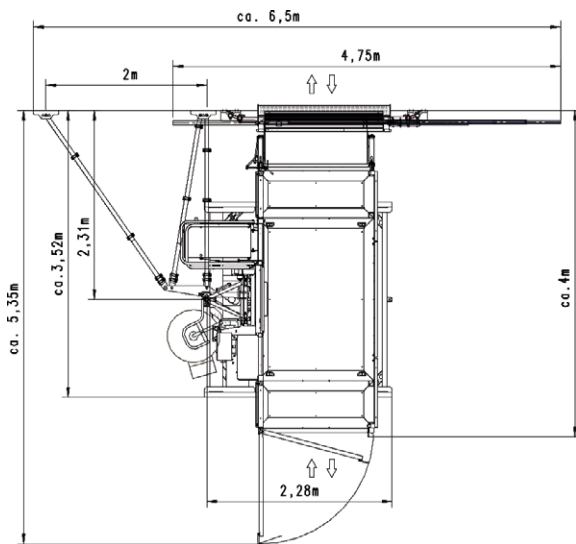

Normal space requirement in front of a wall

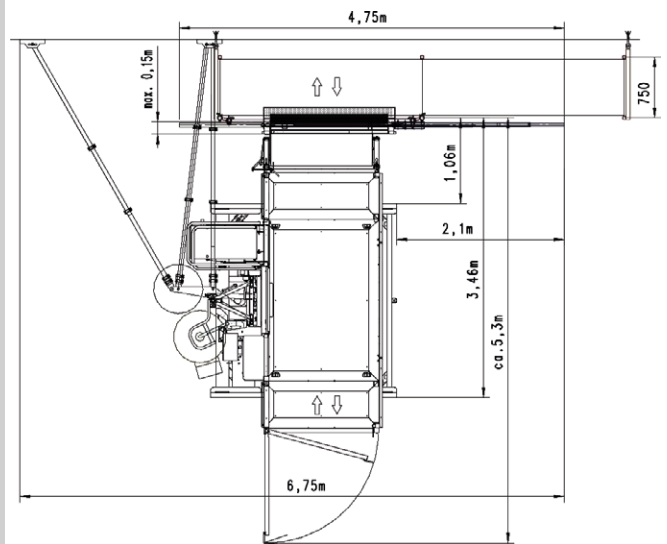


Normal space requirement in front of a scaffold

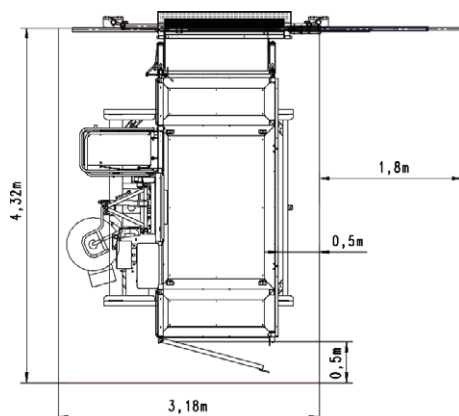

Shaft dimensions (person transport)

Platform:

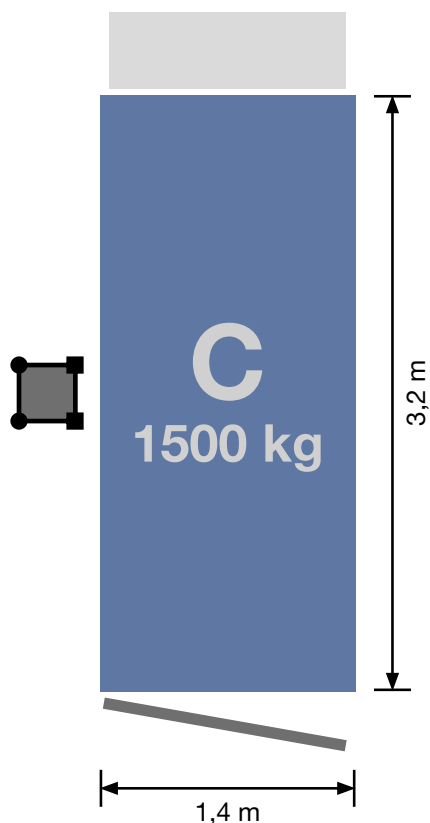

GEDA 1200 Z/ZP platform C 1500 kg 1 loading door / 1 unloading ramp

Recommended landing level safety gates:

Tarpaulin retrofit kit available!



Comfort

Art. No. 01212



Comfort incl. sheet metal panel

Art. No. 68301



VARIO LITE

Art. No. 68200



VARIO/VARIO +

Art. No. 68000;68050

Accessories:


For a wide range of accessories visit:
www.geda.de




Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel


Space requirements:

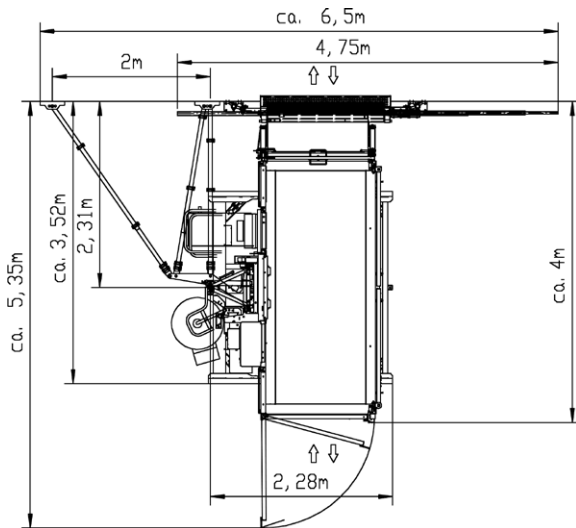

Normal space requirement in front of a wall

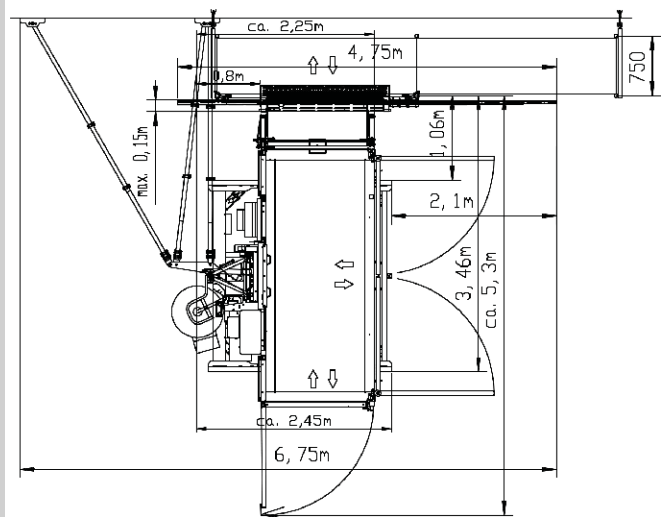

Normal space requirement in front of a scaffold

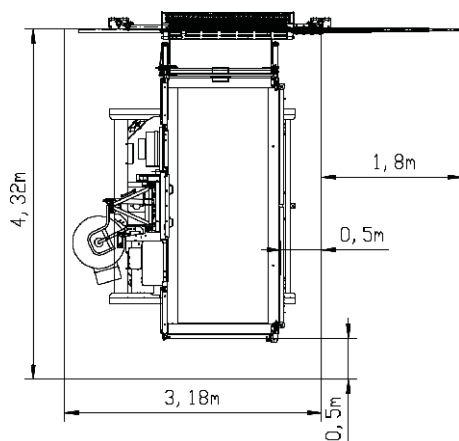

Shaft dimensions (person transport)

GEDA® 1500 Z/ZP

More information
EN
16719
on page 24/25

**Two devices in one:
material hoist and
transport platform**


**Flexible – the right plat-
form variant for any
construction site situation**

GEDA UNI-X-MAST system

**Spacious platform for bul-
ky and heavy construction
materials**

**Automatic lubrication
device as a standard**



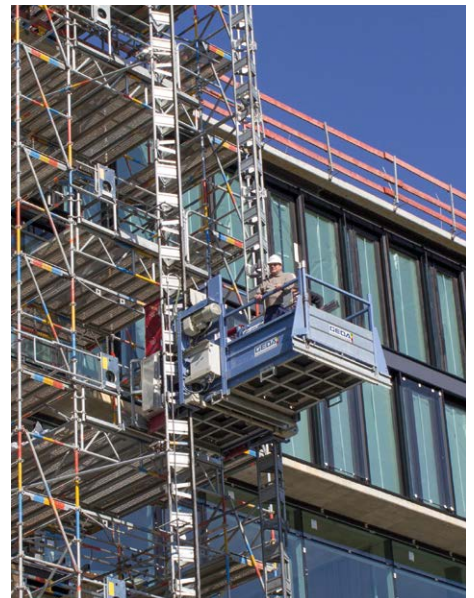

GEDA 1500 Z/ZP

The GEDA 1500 Z/ZP has two separate control systems and can be used either as a material hoist only or as a transport platform for passengers and materials. The transport platform control with a speed of 12 m/min is activated for transporting passengers and materials. For transporting construction materials only, the device is switched to the material hoist mode with a lifting speed of 24 m/min.

One device, numerous possibilities: the double-mast GEDA 1500 Z/ZP transport platform ideally adapts to virtually any conditions on site thanks to the convenient modular system with 14 different platform versions and different load capacities. The large loading platform variants of the GEDA 1500 Z/ZP offer plenty of space – even for transporting particularly heavy and bulky materials. Despite high load capacities of up to 2000 kg, the proven double mast system ensures a stable and smooth travelling motion.

Technical data:



2000 kg
7 persons



100 m




12/24 m/min



**2 x 3.0/6.1 kW/
400 V/ 50 Hz/32 A**

Platform:

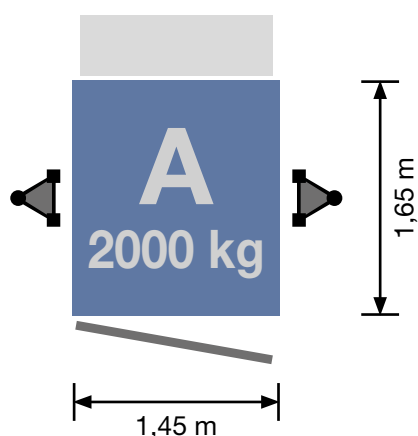

GEDA 1500 Z/ZP platform A

1 loading door / 1 unloading ramp

Recommended landing level safety gates:

Tarpaulin retrofit kit available!



Comfort

Art. No. 01212



Comfort incl. sheet metal panel

Art. No. 68301



VARIO LITE

Art. No. 68200



VARIO/VARIO +

Art. No. 68000;68050

Accessories:


For a wide range of accessories visit:
www.geda.de




Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel


Space requirements:

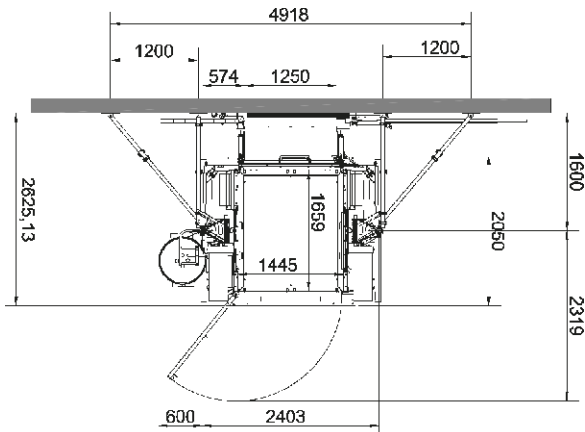


Normal space requirement in front of a wall

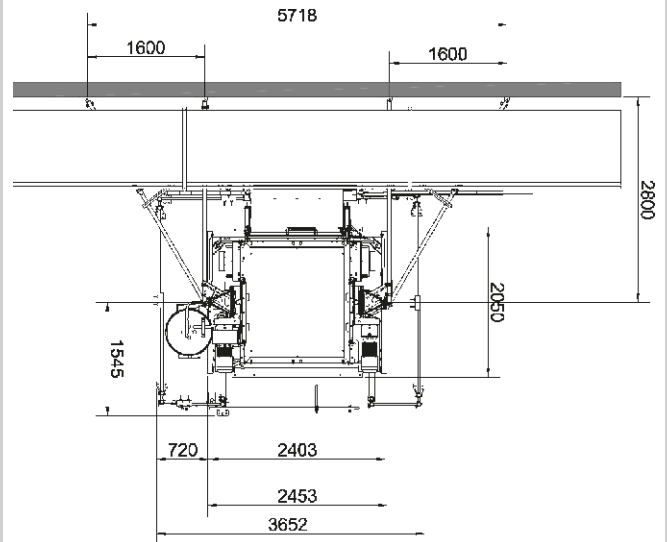

Normal space requirement in front of a scaffold




Shaft dimensions (no person transport)

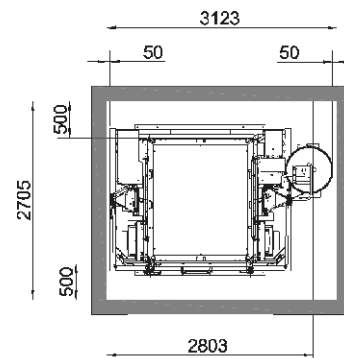

Shaft dimensions (person transport)

Platform:

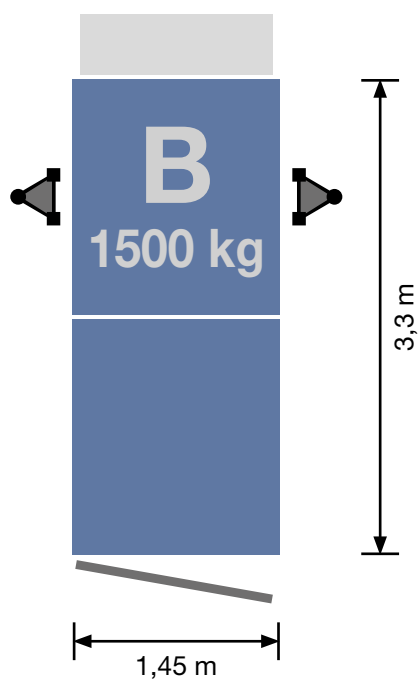

GEDA 1500 Z/ZP platform B

1 loading door / 1 unloading ramp

Recommended landing level safety gates:

Tarpaulin retrofit kit available!



Comfort

Art. No. 01212



Comfort incl. sheet metal panel

Art. No. 68301



VARIO LITE

Art. No. 68200



VARIO/VARIO +

Art. No. 68000;68050

Accessories:


For a wide range of
accessories visit:
www.geda.de




Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel


Space requirements:

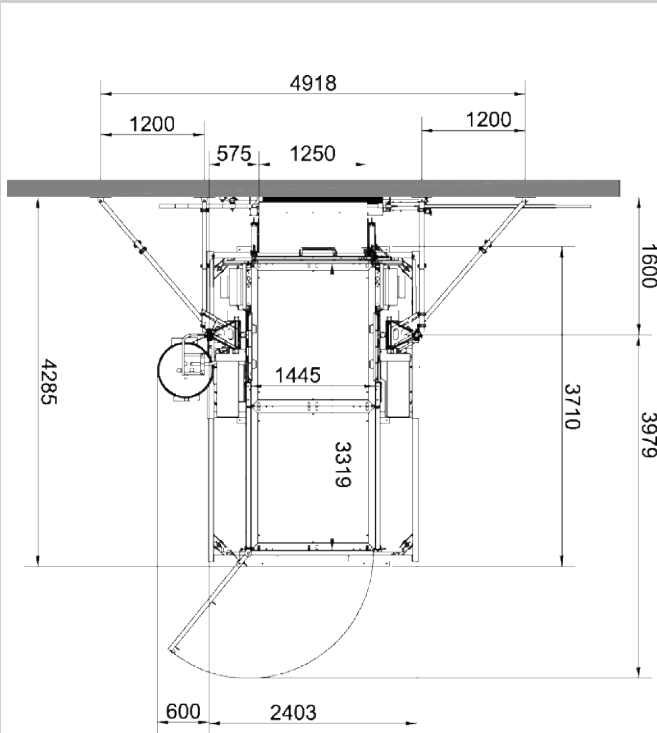


Normal space requirement in front of a wall

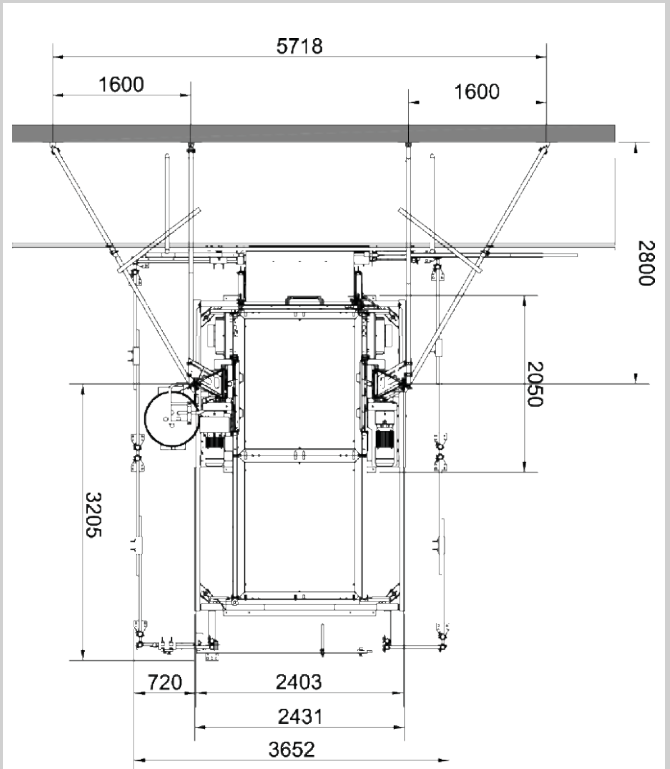

Normal space requirement in front of a scaffold

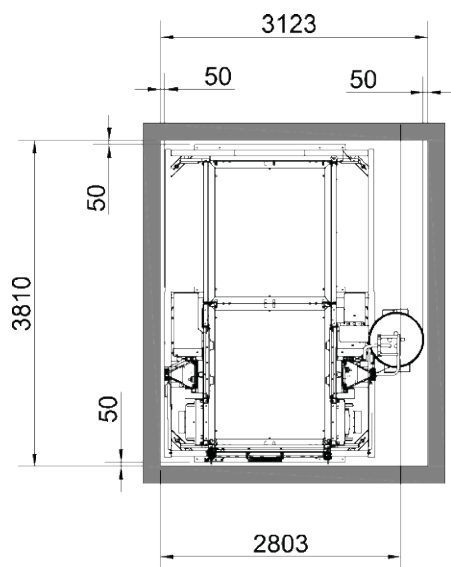


Shaft dimensions (no person transport)

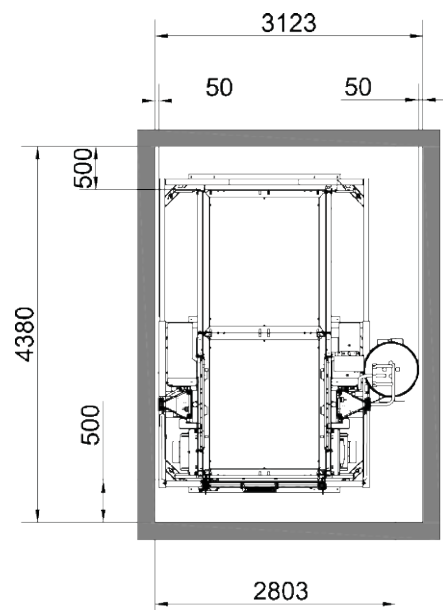

Shaft dimensions (person transport)

Platform:

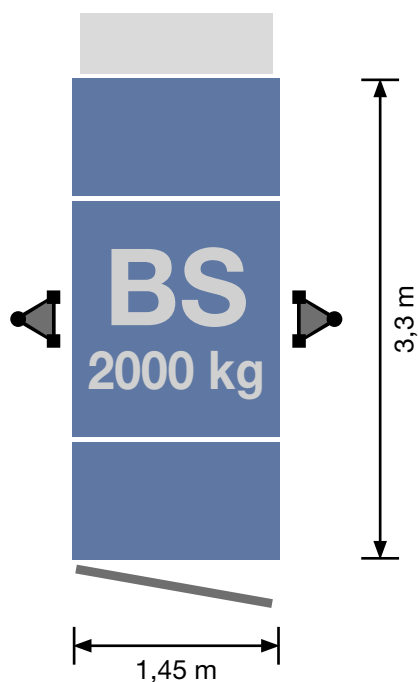

GEDA 1500 Z/ZP platform BS

1 loading door / 1 unloading ramp

Recommended landing level safety gates:

Tarpaulin retrofit kit available!



Comfort

Art. No. 01212



Comfort incl. sheet metal panel

Art. No. 68301



VARIO LITE

Art. No. 68200



VARIO/VARIO +

Art. No. 68000;68050

Accessories:


For a wide range of
accessories visit:
www.geda.de




Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel


Space requirements:

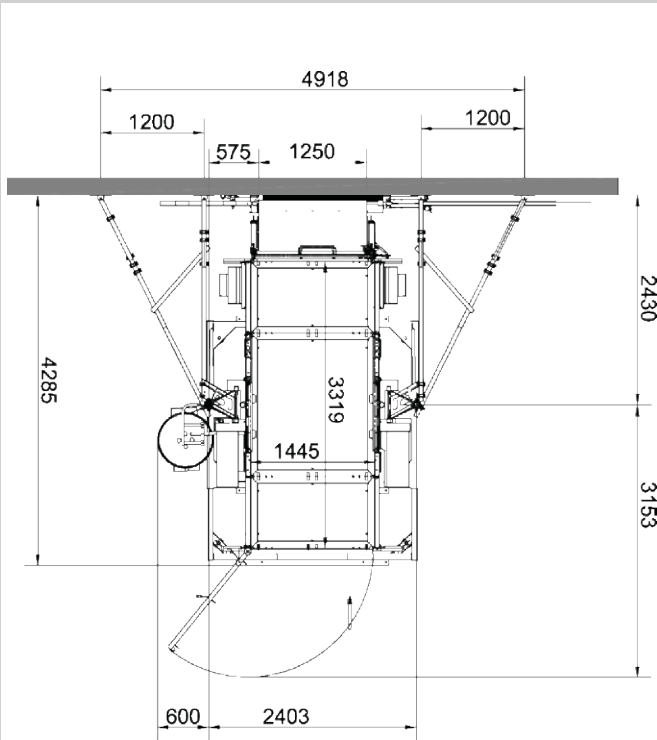


Normal space requirement in front of a wall

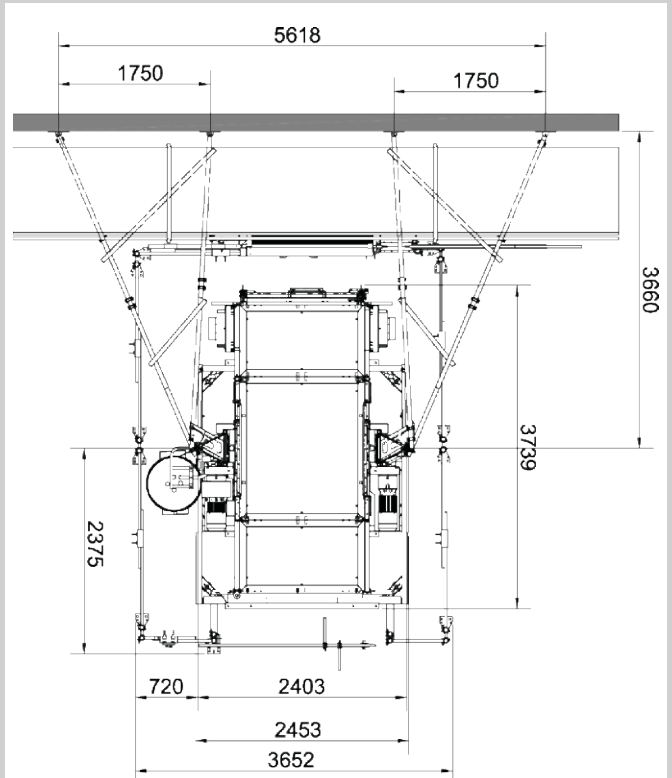

Normal space requirement in front of a scaffold

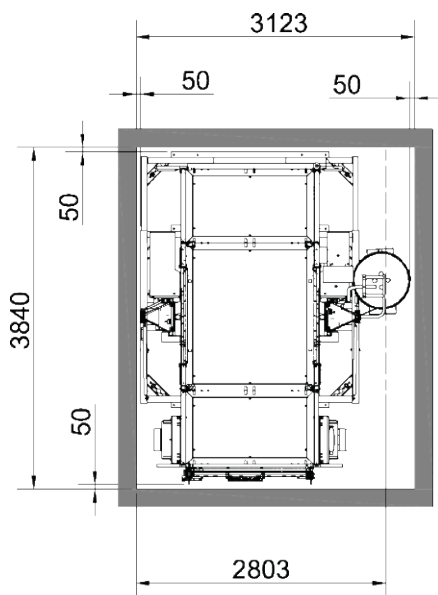


Shaft dimensions (no person transport)

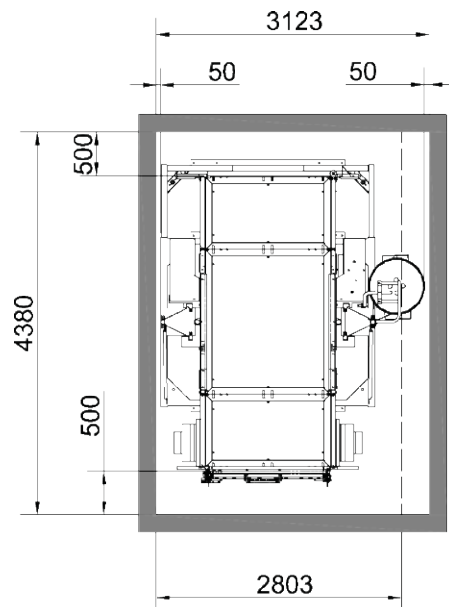

Shaft dimensions (person transport)

Platform:

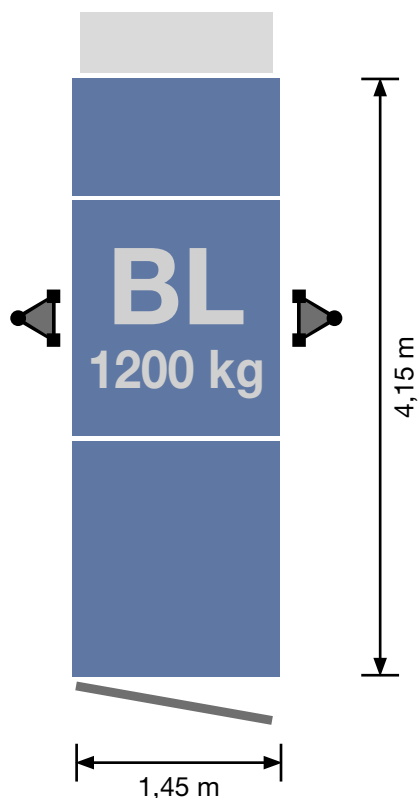

GEDA 1500 Z/ZP platform BL 1 loading door / 1 unloading ramp

Recommended landing level safety gates:

Tarpaulin retrofit kit available!



Comfort

Art. No. 01212



Comfort incl. sheet metal panel

Art. No. 68301



VARIO LITE

Art. No. 68200



VARIO/VARIO +

Art. No. 68000;68050

Accessories:


For a wide range of
accessories visit:
www.geda.de




Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel


Space requirements:

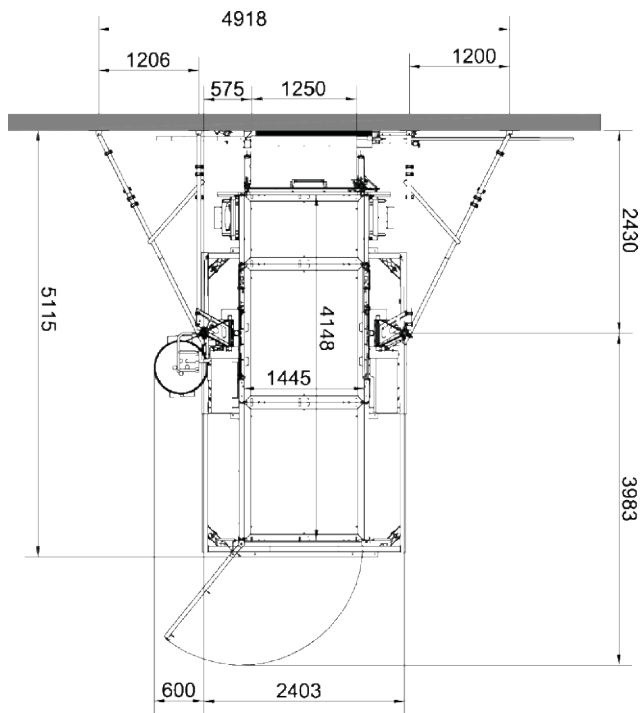


Normal space requirement in front of a wall

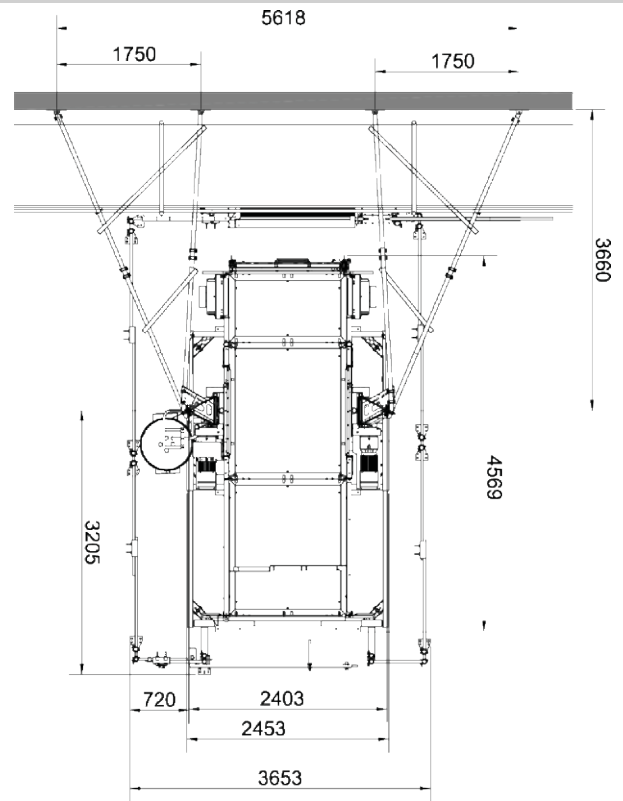

Normal space requirement in front of a scaffold

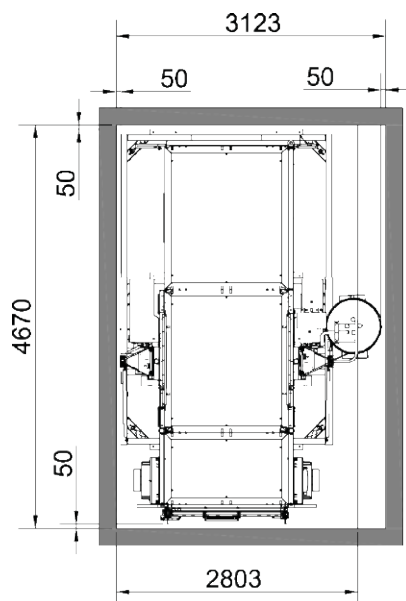


Shaft dimensions (no person transport)

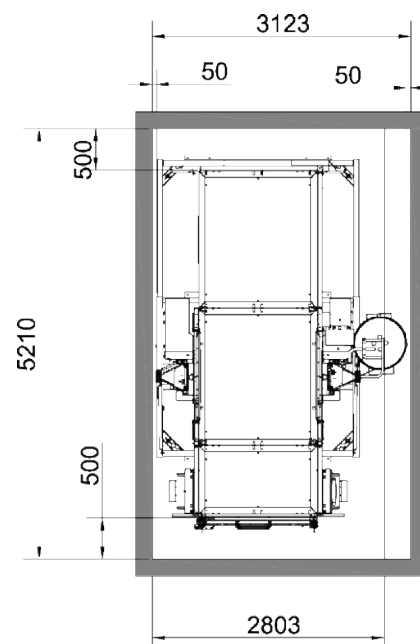

Shaft dimensions (person transport)

Platform:

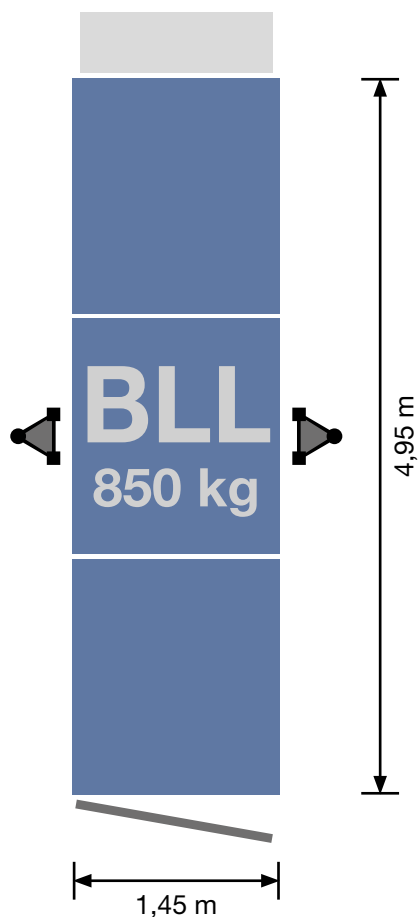

GEDA 1500 Z/ZP platform BLL 1 loading door / 1 unloading ramp

Recommended landing level safety gates:

Tarpaulin retrofit kit available!



Comfort

Art. No. 01212



Comfort incl. sheet metal panel

Art. No. 68301



VARIO LITE

Art. No. 68200



VARIO/VARIO +

Art. No. 68000;68050

Accessories:


For a wide range of accessories visit:
www.geda.de




Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel


Space requirements:

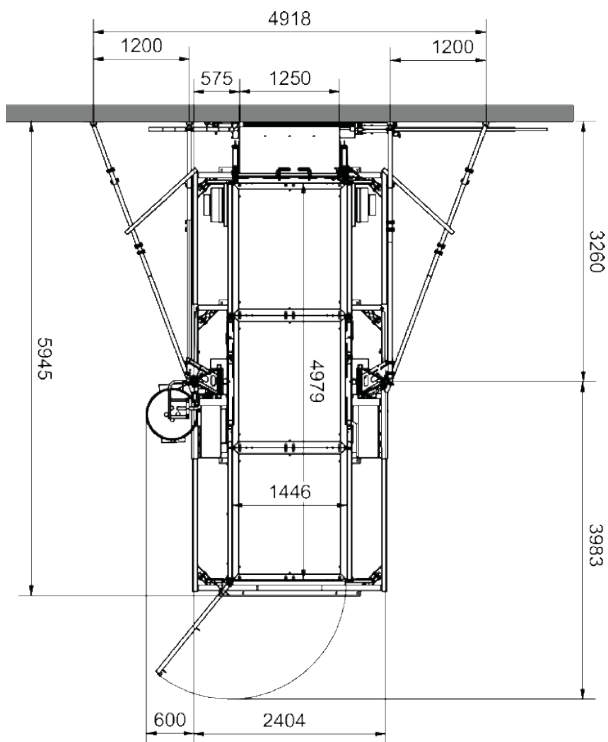


Normal space requirement in front of a wall

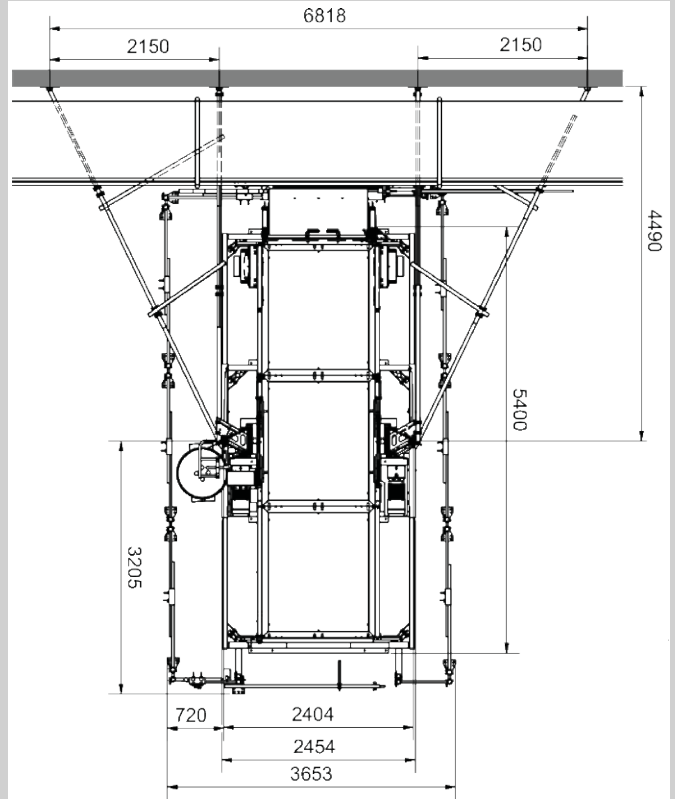

Normal space requirement in front of a scaffold

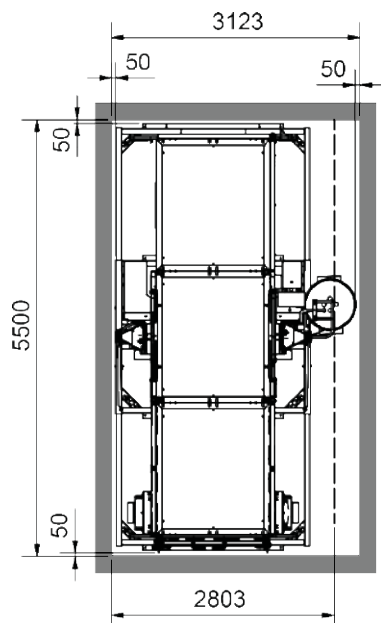


Shaft dimensions (no person transport)



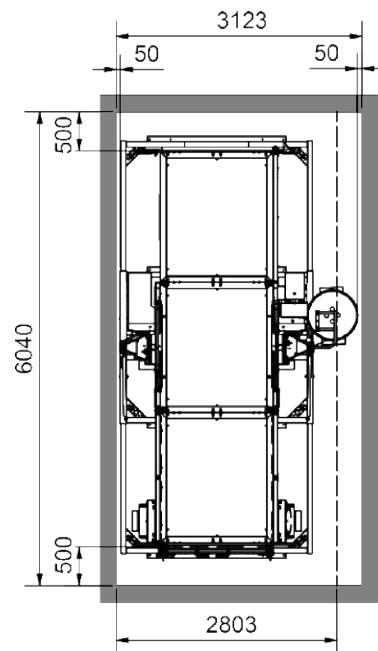


Shaft dimensions (person transport)

Platform:

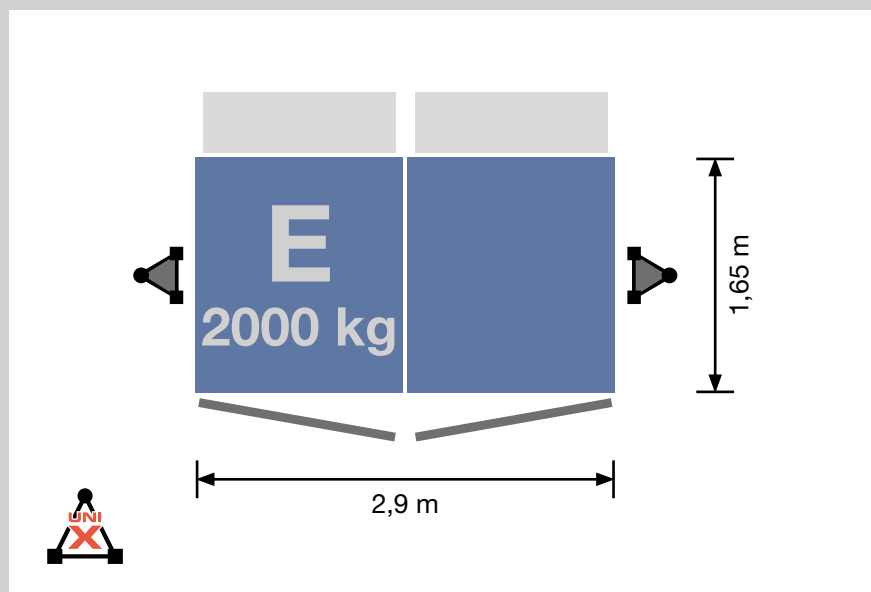

GEDA 1500 Z/ZP platform E 2 loading doors / 2 unloading ramps

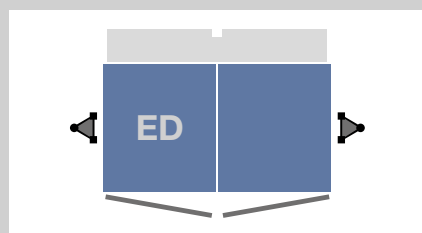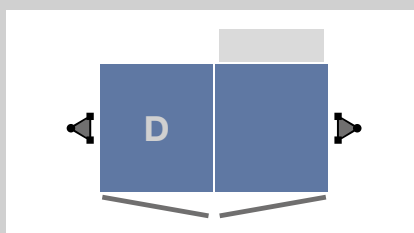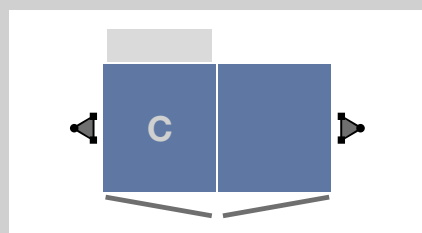

Accessories:

For a wide range of
accessories visit:
www.geda.de



Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 01213	Comfort-Maxi
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel

Recommended landing level safety gates:

Tarpaulin retrofit
kit available!



Comfort

Art. No. 01212



Comfort incl. sheet metal panel

Art. No. 68301



VARIO LITE

Art. No. 68200



VARIO/VARIO +


Art. No. 68000;68050




VARIO MAXI/VARIO MAXI +

Art. No. 68100;68150


Space requirements:

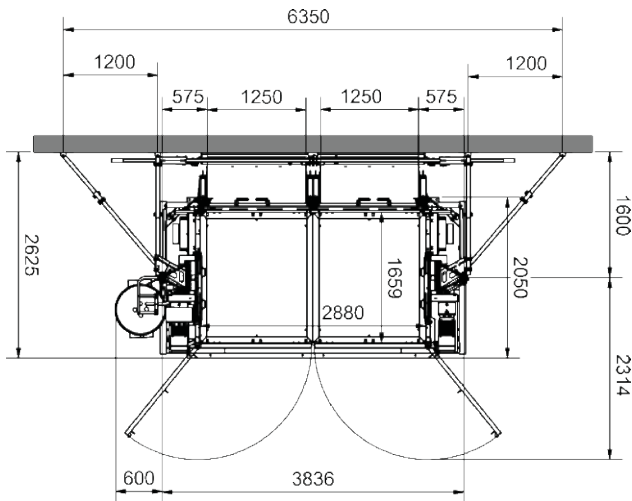


Normal space requirement in front of a wall

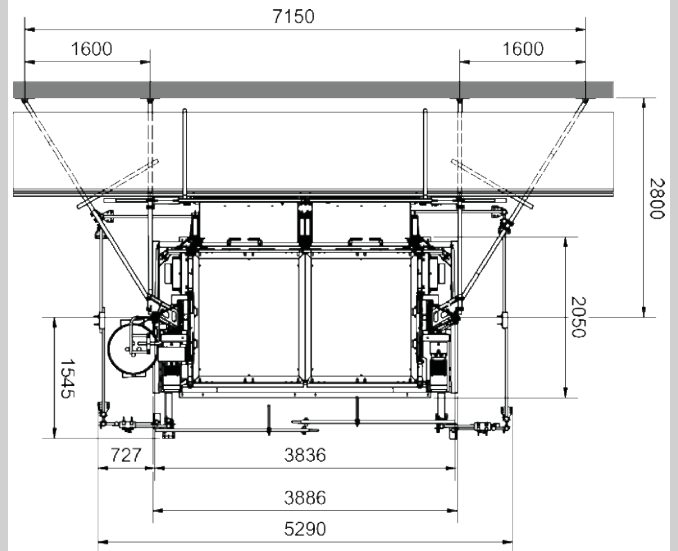

Normal space requirement in front of a scaffold

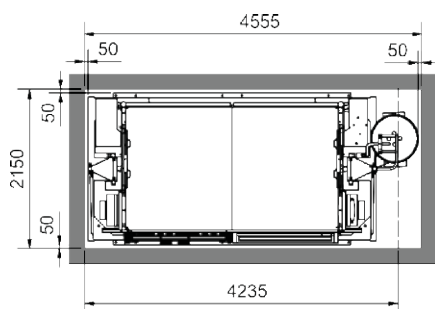


Shaft dimensions (no person transport)



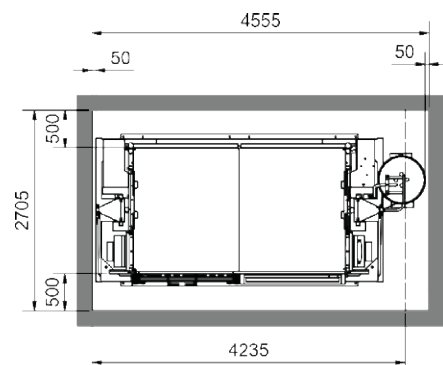


Shaft dimensions (person transport)

Platform:

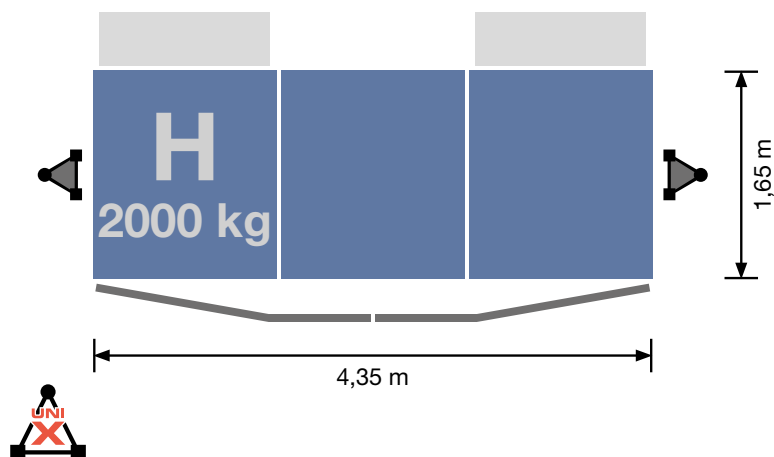

GEDA 1500 Z/ZP platform H 2 loading doors / 2 unloading ramps

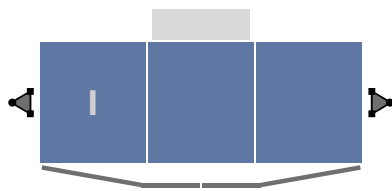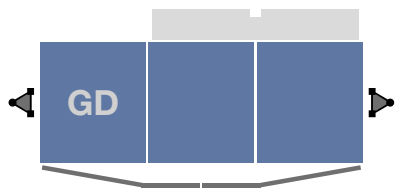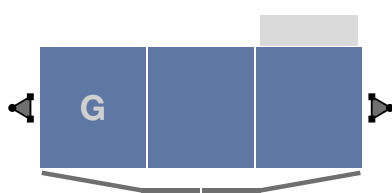

Accessories:

For a wide range of
accessories visit:
www.geda.de



Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 01213	Comfort-Maxi
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel

Recommended landing level safety gates:

Tarpaulin retrofit
kit available!



Comfort
Art. No. 01212



Comfort incl. sheet metal panel
Art. No. 68301



VARIO LITE
Art. No. 68200




VARIO/VARIO +
Art. No. 68000;68050




VARIO MAXI/VARIO MAXI +
Art. No. 68100;68150


Space requirements:

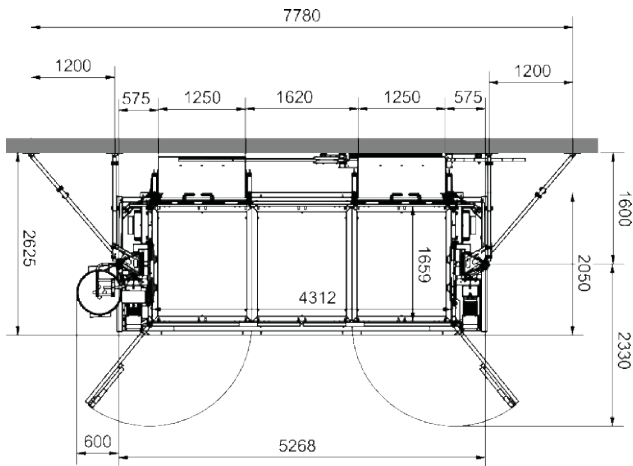


Normal space requirement in front of a wall

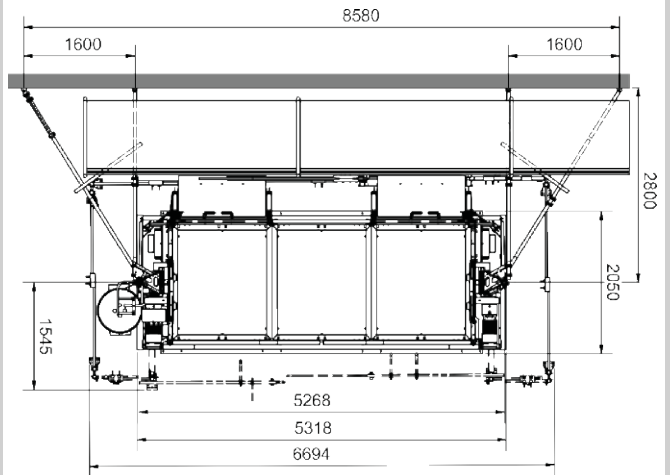

Normal space requirement in front of a scaffold

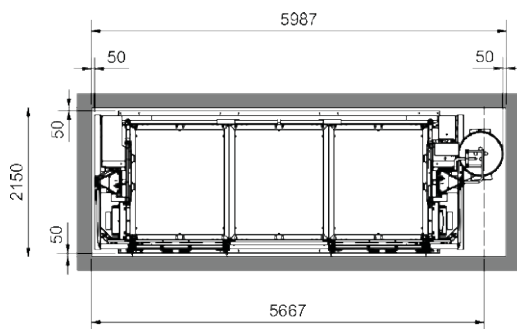

Shaft dimensions (no person transport)

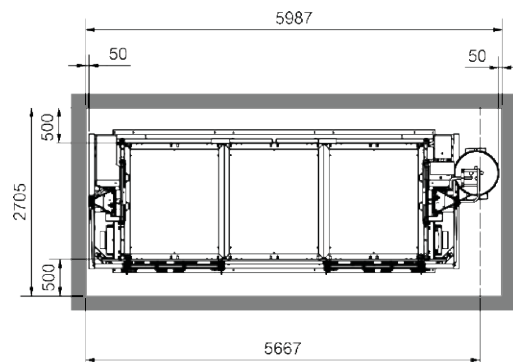

Shaft dimensions (person transport)

GEDA® 3700 Z/ZP

More information
EN
16719
on page 24/25

**Two devices in one:
material hoist and
transport platform**

**Extremely large platform –
ideal for bulky and heavy
construction materials**


**Gentle start and stop and
precise positioning at the
landing level**

Patented flat cable system

**Automatic lubrication
device as a standard**

**Break-off safety for flat
cable as a standard**



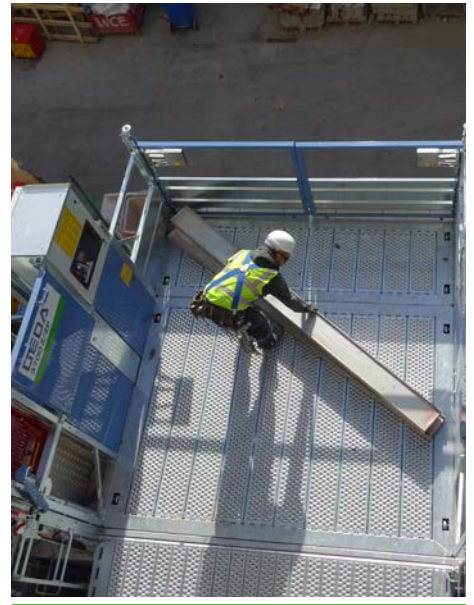

GEDA 3700 Z/ZP

The GEDA 3700 Z/ZP transport platform fully meets the market requirements for higher load capacities and larger platforms. Four different platform variants with a maximum load capacity of 3700 kg allow the transport platform to be used in a wide range of on-site conditions. As a material hoist with a load capacity of up to 3700 kg or as a transport platform for passengers and materials (max. seven people), the GEDA 3700 Z/ZP is a two-in-one-device.

The transport platform is a strong partner for heavy loads and efficient working and transports loads quickly and safely up to a height of 200 metres, with a speed of 12 m/min in passenger mode and 24 m/min in material mode.

The most important benefit of the GEDA 3700 Z/ZP, however, is the large platform. The four different variants with different load capacities are particularly suitable for transporting very bulky and heavy goods.

Technical data:




3700 kg
7 persons



200 m




12/24 m/min




**28 kW/400 V/
50 Hz/63 A**

Platform:

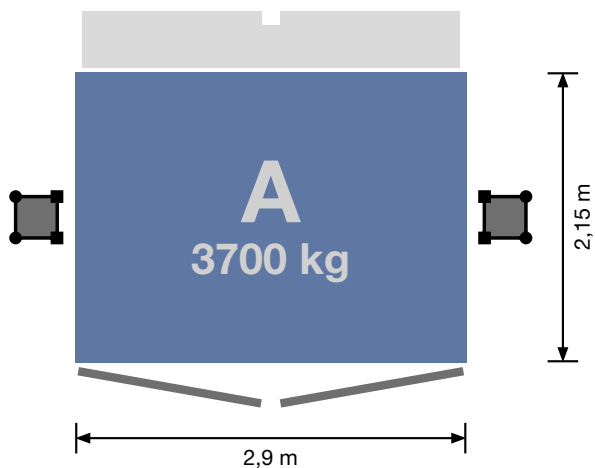

GEDA 3700 Z/ZP platform A

2 loading doors / 1 unloading double ramp

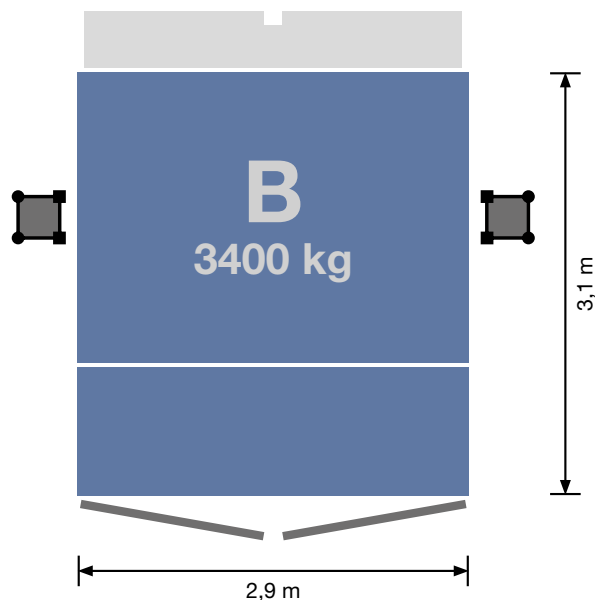


GEDA 3700 Z/ZP platform B

2 loading doors / 1 unloading double ramp


Accessories:

For a wide range of
accessories visit:
www.geda.de



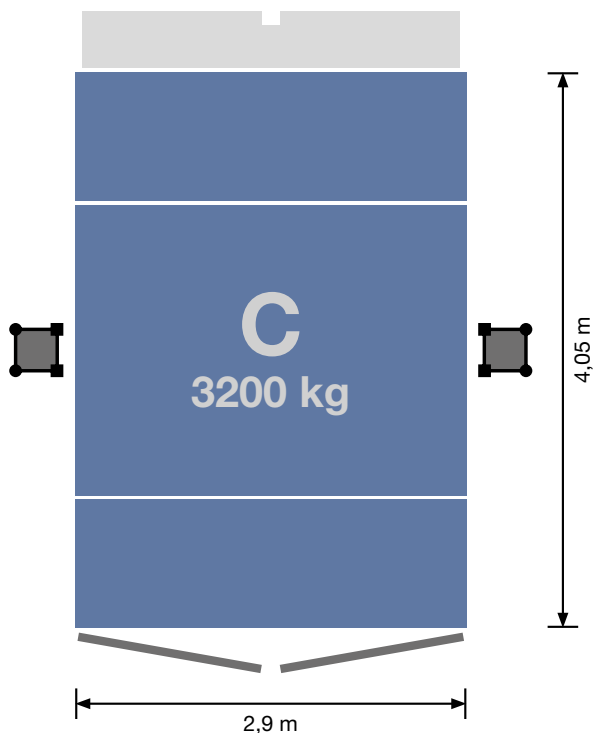

GEDA 3700 Z/ZP platform C
2 loading doors / 1 unloading double ramp

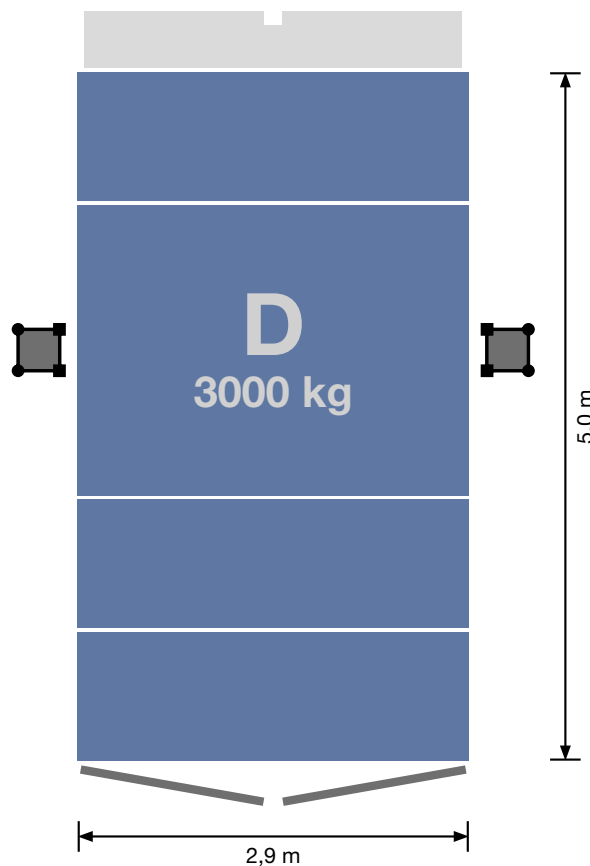

GEDA 3700 Z/ZP platform D
2 loading doors / 1 unloading double ramp


Landing level safety gates:



Comfort-Maxi
Art. No. 01213



VARIO MAXI/VARIO MAXI +
Art. No. 68100;68150

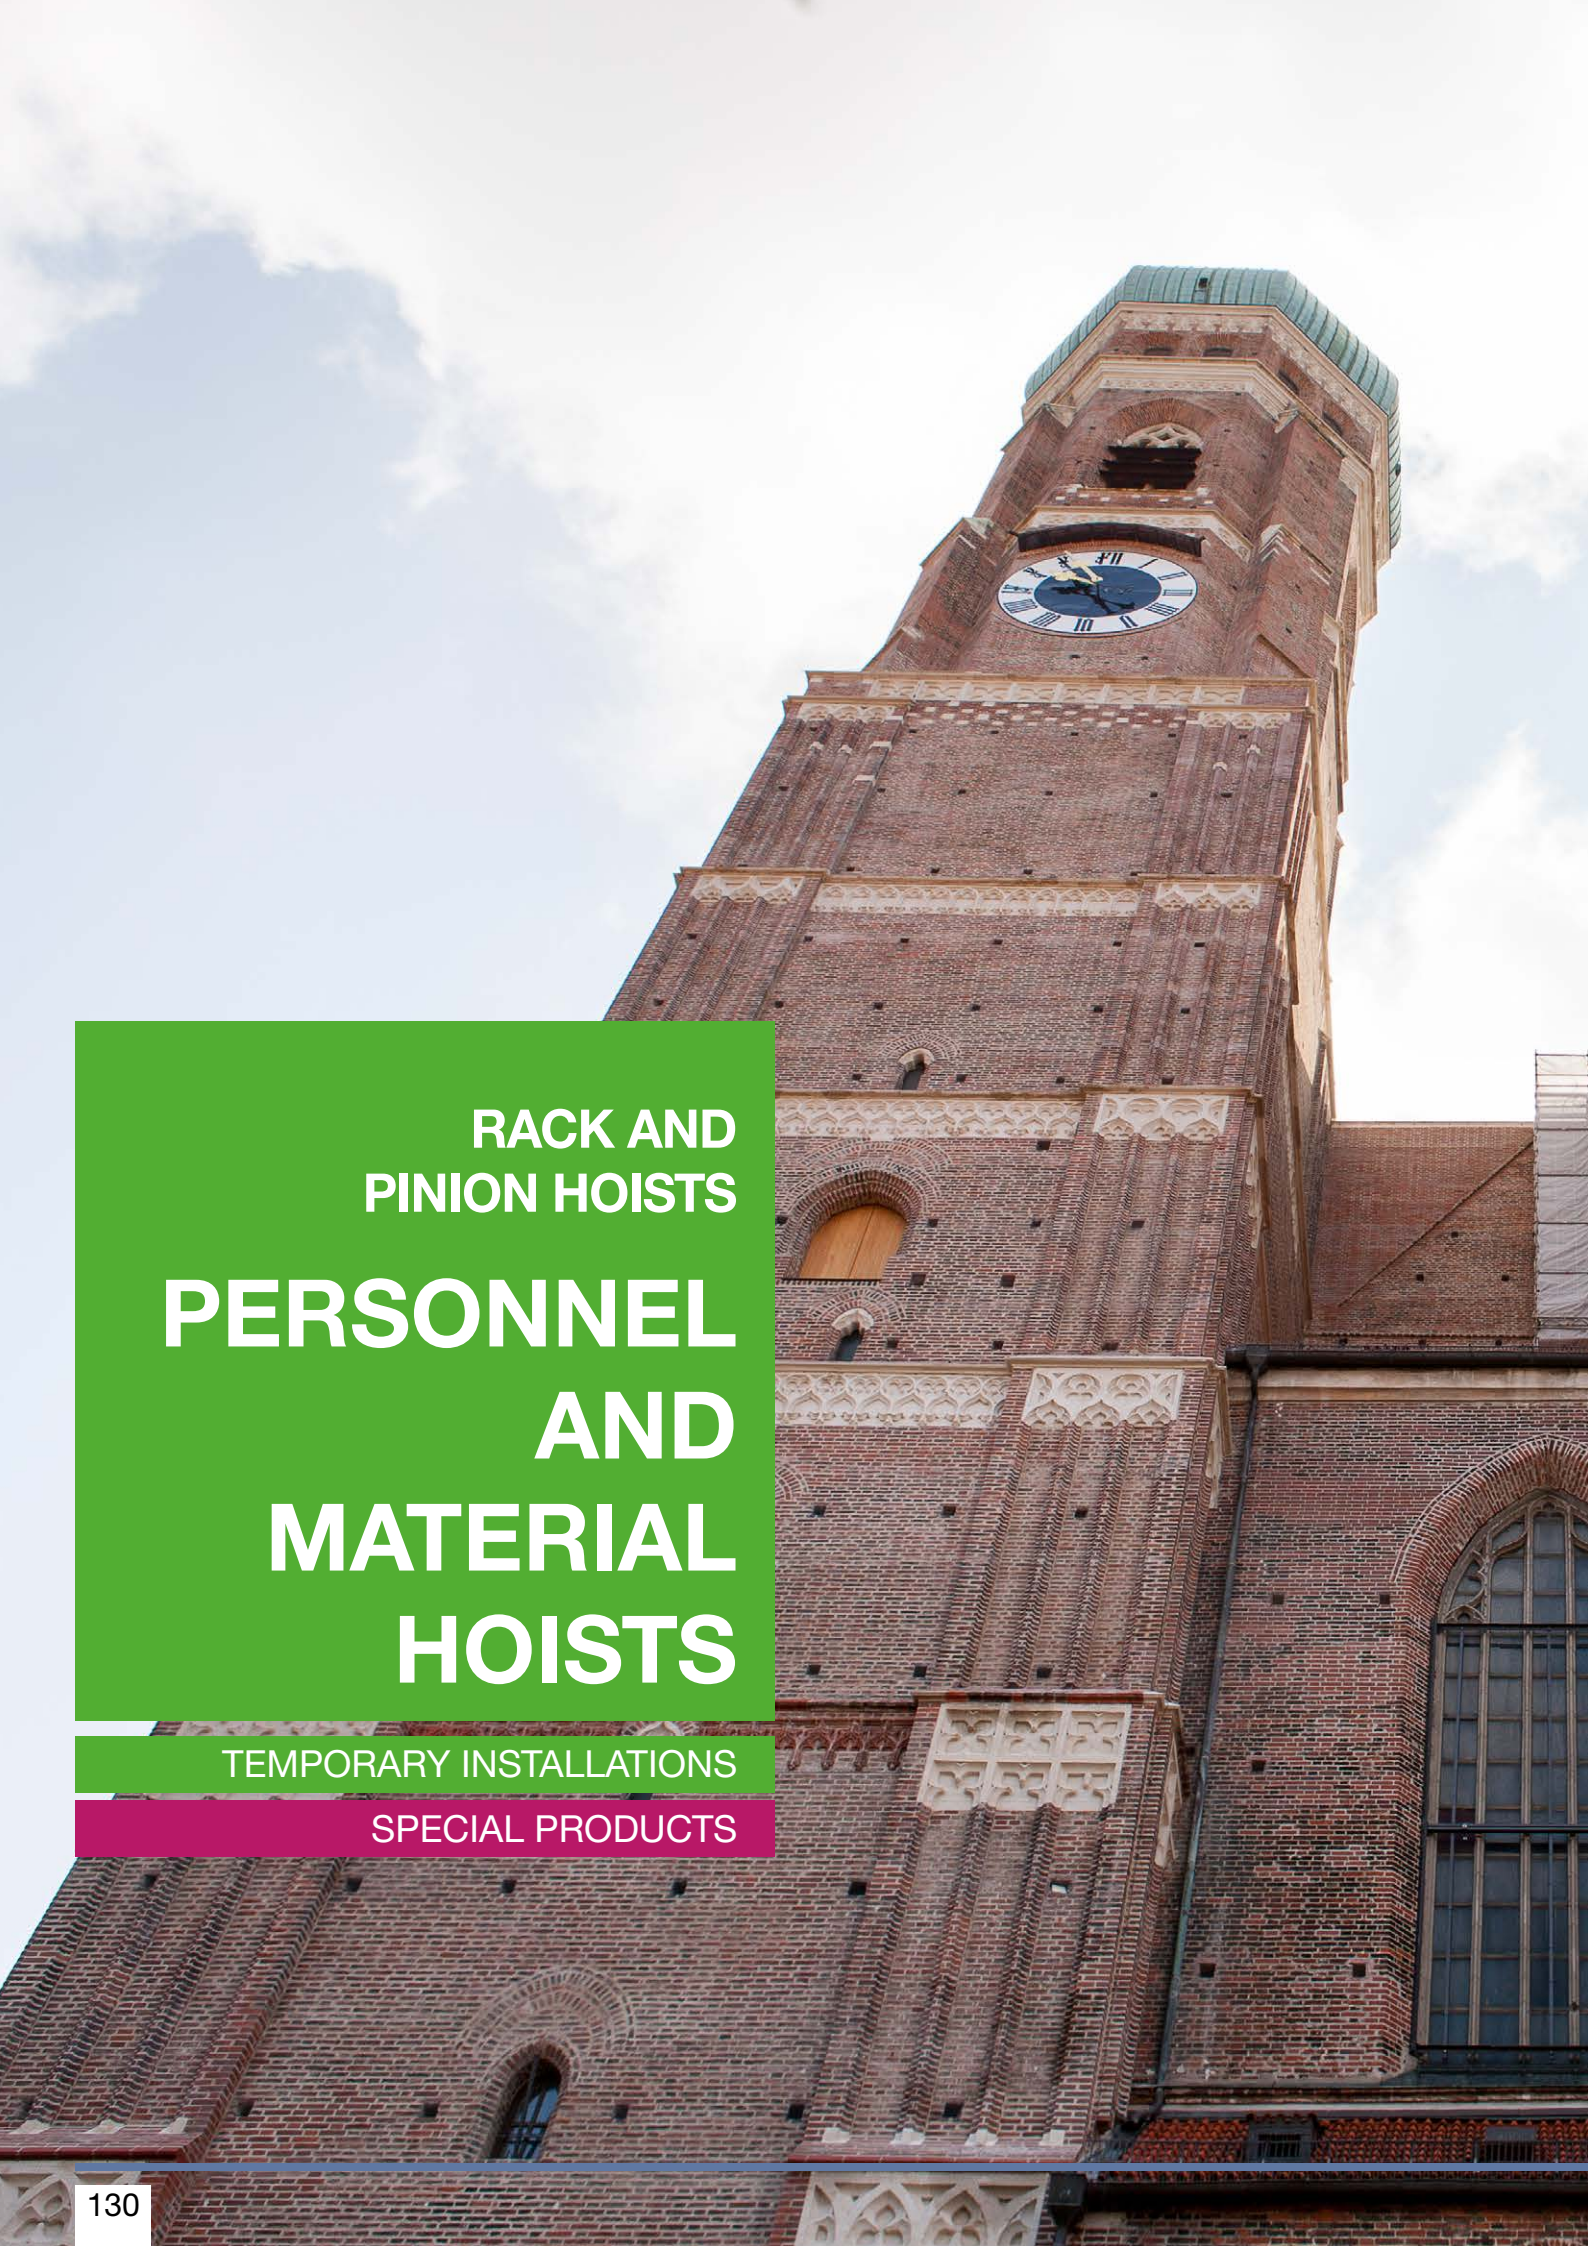

RACK AND
PINION HOISTS

PERSONNEL AND MATERIAL HOISTS

TEMPORARY INSTALLATIONS

SPECIAL PRODUCTS





ELEVATED



GEDA® MULTILIFT P6

**Compact, pre-installed
base unit comprising:
car, enclosure, flat cable
bin and drive**

GEDA UNI-X-MAST system

No foundations required

Modular system

**Fast and safe assembly
directly from the car**

**Automatic lubrication
device as a standard**

**Break-off safety for flat
cable as a standard**





GEDA MULTILIFT P6

The passenger and material hoists from the Multilift range offer the right hoist solution for virtually any construction site application, thanks to the modular system and unique features.

The “smallest” in the range, the GEDA Multilift P6, offers an impressive load capacity for 650 kg or six passengers. The lifting speed is 24 m/min with a maximum lifting height of 100 m.

Installation and dismantling of the Multilift P6 is fast and, above all, safe. The complete base unit, consisting of the car, enclosure, flat cable bin and drive, is delivered as one unit – with perfect dimensions for container loading and HGV transport. Foundations are not necessary. The device can then be set up on-site immediately – for optimum logistics from the outset. With the integrated roof hatch and the assembly guard flap inside the hoist, the device can be easily assembled and disassembled from the platform.

Technical data:



650 kg
6 persons



100 m




12/24 m/min



**3.0/6.1 kW/400 V/
50 Hz/16 A**

Platform:

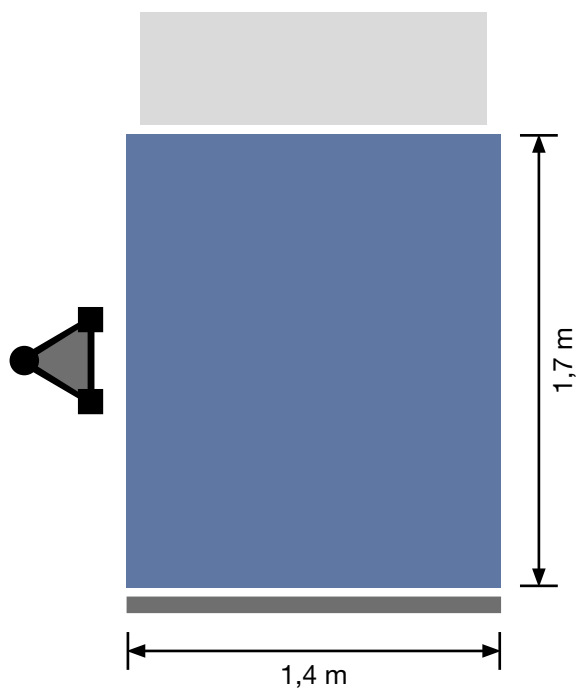

GEDA MULTILIFT P6

1 loading sliding door / 1 unloading ramp

Recommended landing level safety gates:



Comfort

Art. No. 01212



VARIO LITE

Art. No. 68200



VARIO/VARIO +

Art. No. 68000;68050



High and closed 1.8 m/2.1 m

Art. No. 41442;41441

Accessories:

For a wide range of
accessories visit:
www.geda.de




Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68301	Comfort incl. sheet metal panel
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel

SOLUTIONS

Which height access solution can GEDA offer specifically for my requirements? Classified by Construction Site, Industry and Façade Works, the new GEDA applications section will guide you to the appropriate product for your needs from its comprehensive product range.

www.geda.de/en/SOLUTIONS

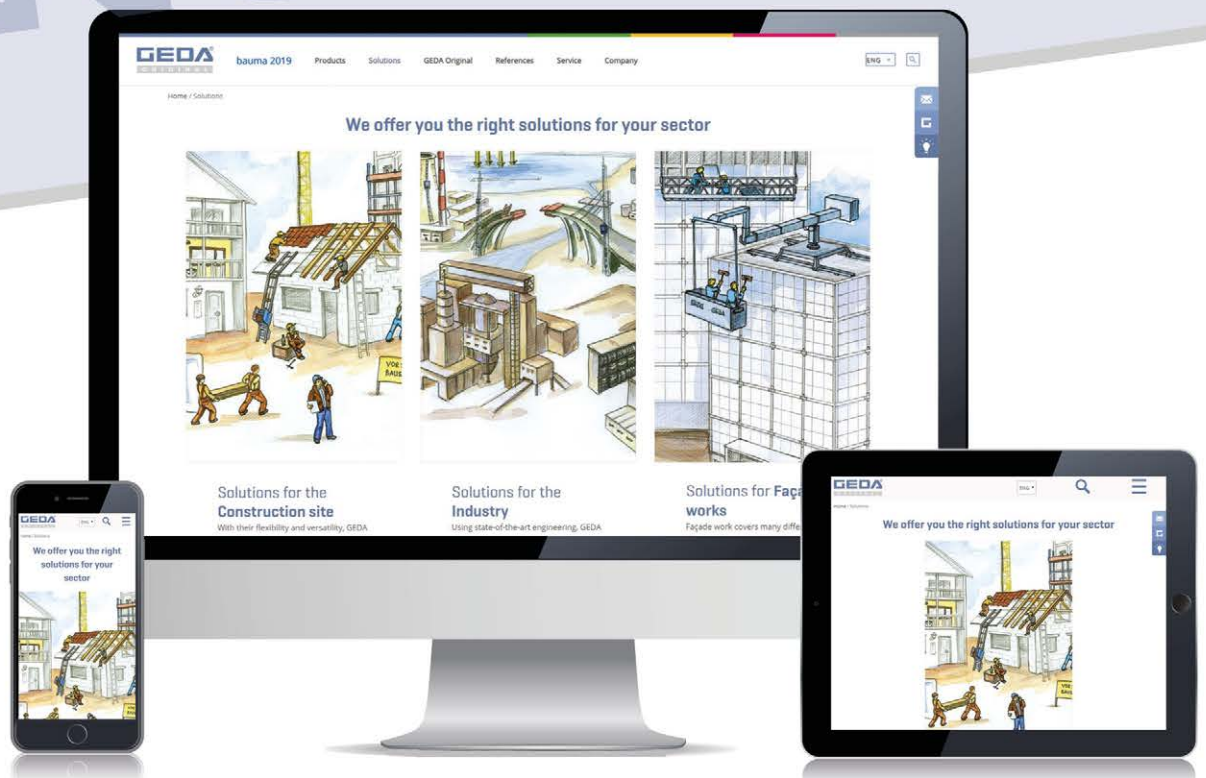

www.geda.de

GEDA® MULTILIFT P12

**Compact, pre-installed
base unit comprising:
car, enclosure, flat cable
bin and drive**

No foundations required

Modular system

**Fast and safe assembly
directly from the car**

**Ideal for assembly in
shafts**

**Automatic lubrication
device as a standard**

**Break-off safety for flat
cable as a standard**





GEDA MULTILIFT P12

The modular system design of the GEDA Multilift range provides a suitable hoist solution for virtually any construction site application.

The compact, pre-installed base unit of the GEDA Multilift P12 consists of the car, enclosure, flat cable bin and drive and is delivered as one unit. The hoist therefore requires no foundations, which often would have to be poured specifically.

The Multilift reveals its advantages especially when space is restricted. Compared to large passenger hoists, the GEDA Multilift P12 has a footprint of only a few square metres.

The hoist can be quickly and efficiently assembled from the car. Operation is controlled conveniently with landing pre-selection in the car and at all landing levels. With a lifting speed of 12 - 40 m/min, the GEDA Multilift P12 transports 1500 kg of materials or 12 people quickly and safely. Four different platform variants with different load capacities ensure flexible adaptation of the passenger and material hoist to the situation on site. Despite the high load capacity, the GEDA Multilift P12 impresses with its low anchoring forces – and with only one mast. The proven GEDA VARIO-MAST system is used.

Technical data:




1500 kg
12 persons



150 m




40 m/min




**15 kW/380-480 V/
50-60 Hz/32 A**

Platform:

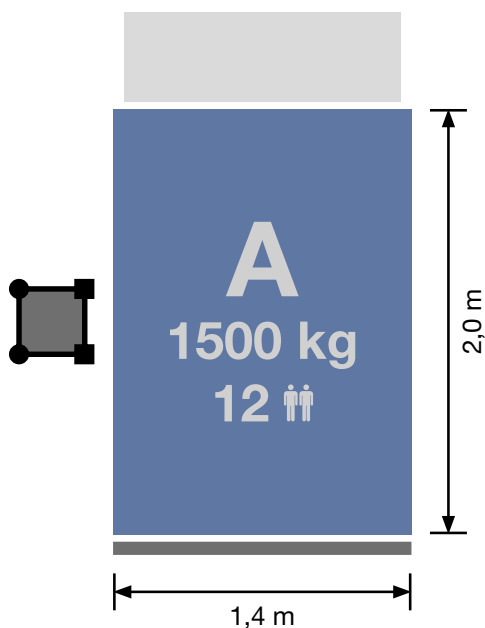

GEDA MULTILIFT P12 platform A
1 loading sliding door / 1 unloading ramp

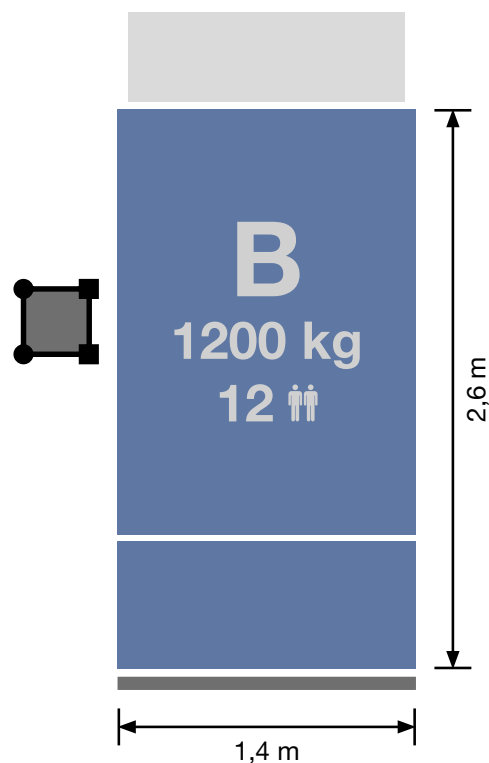

GEDA MULTILIFT P12 platform B
1 loading sliding door / 1 unloading ramp

Accessories:

For a wide range of
accessories visit:
www.geda.de




Recommended landing level safety gates:




Comfort
Art. No. 01212



VARIO LITE
Art. No. 68200

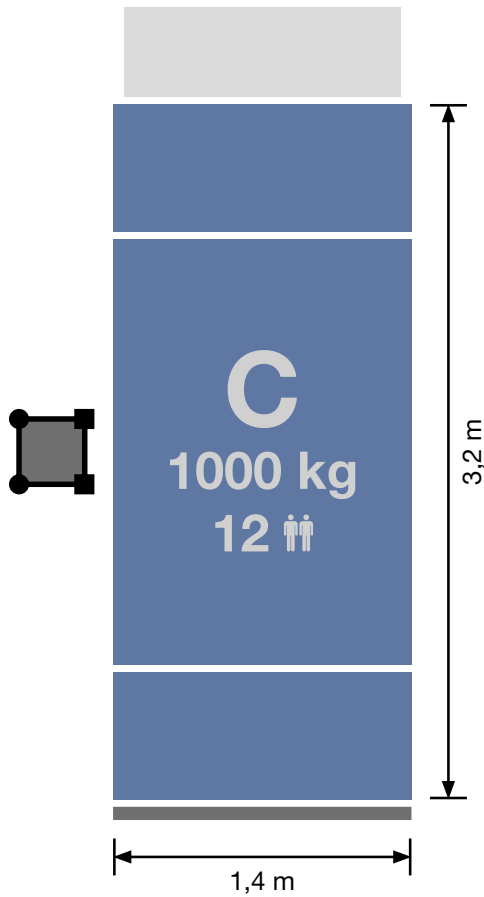

GEDA MULTILIFT P12 platform C
1 loading sliding door / 1 unloading ramp

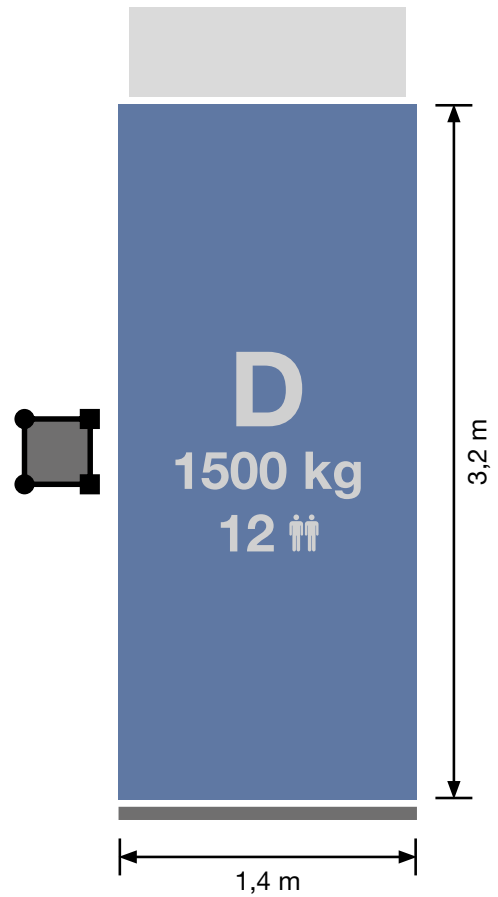

GEDA MULTILIFT P12 platform D
1 loading sliding door / 1 unloading ramp



VARIO/VARIO +
Art. No. 68000;68050



High and closed 1.8 m/2.1 m
Art. No. 41442;41441

Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68301	Comfort incl. sheet metal panel
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel

GEDA® MULTILIFT P18

**Compact, pre-installed
base unit comprising:
car, enclosure, flat cable
bin and drive**

GEDA UNI-X-MAST system

No foundations required

Modular system

**Fast and safe assembly
directly from the car**

**Automatic lubrication
device as a standard**

**Break-off safety for flat
cable as a standard**





GEDA MULTILIFT P18

The tried-and-tested know-how of the entire GEDA Multilift range was included in the development of the GEDA Multilift P18. The GEDA Multilift P18 consequently features a completely pre-installed base unit, consisting of the car, enclosure, space-saving flat cable bin and drive. This makes long installation times a thing of the past, and the mast elements can be set up on site immediately – directly from the car.

The GEDA Multilift P18 also has a footprint of only a few square metres. Three different platform variants with different load capacities allow the GEDA Multilift P18 to be flexibly adapted to the requirements on site. The enormous loading volume permits transport even of particularly heavy and bulky goods, such as plasterboard for interior construction work.

The GEDA Multilift P18 has a load capacity of 2000 kg or 20 passengers and a lifting speed of 32 m/min. The two-mast system ensures stable travelling up to a height of 100 m.

GEDA also scores with the innovative flat cable system. The flat cable conveyor ensures that the cable always remains taut in the flat cable bin, even in strong winds, avoiding the dreaded corkscrew effect.

Technical data:



2000 kg
20 persons



100 m




32 m/min




**15 kW/380-480 V/
50-60 Hz/32 A**

Platform:

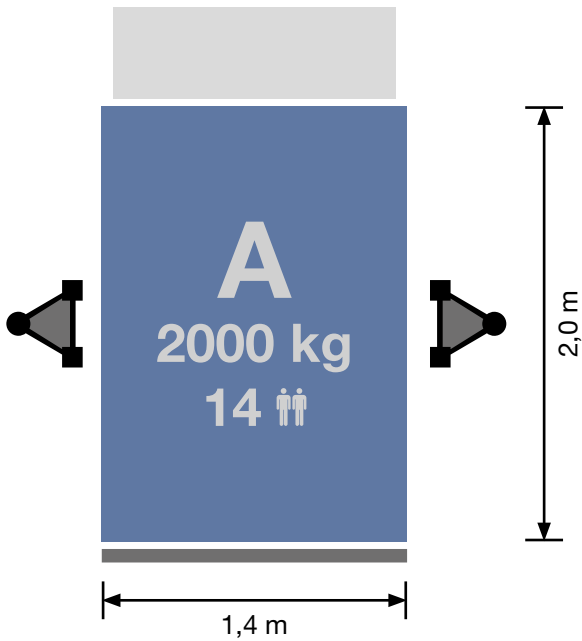

GEDA MULTILIFT P18 platform A
1 loading sliding door / 1 unloading ramp

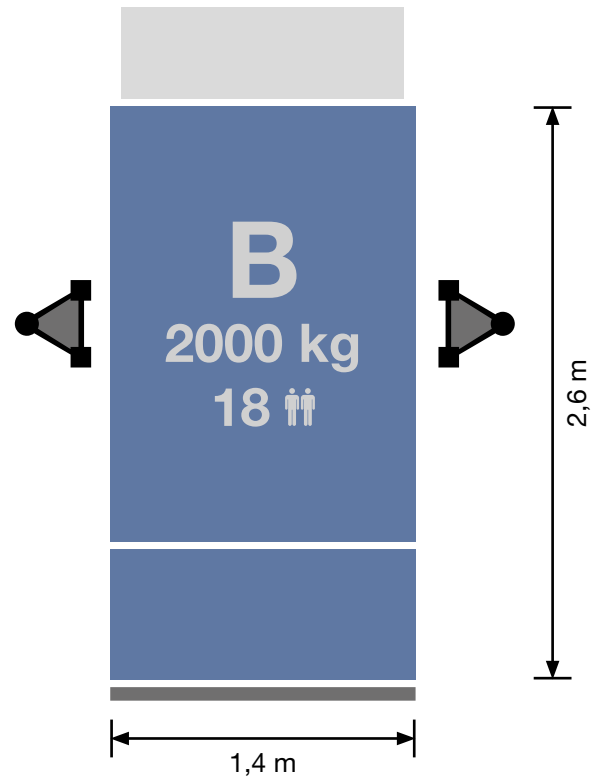


GEDA MULTILIFT P18 platform B
1 loading sliding door / 1 unloading ramp

Accessories:

For a wide range of
accessories visit:
www.geda.de



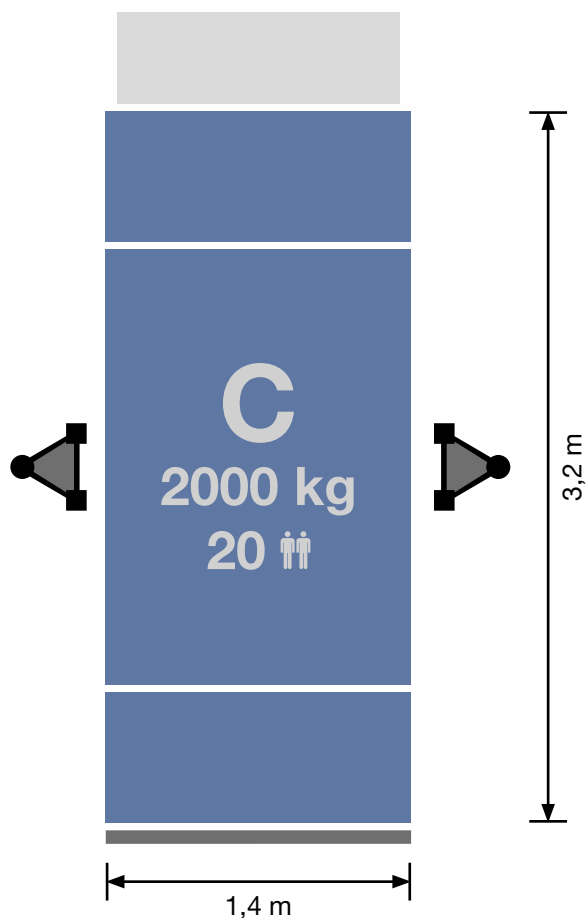

GEDA MULTILIFT P18 platform C
1 loading sliding door / 1 unloading ramp

Recommended landing level safety gates:



Comfort
Art. No. 01212



VARIO LITE
Art. No. 68200



VARIO/VARIO +
Art. No. 68000;68050



High and closed 1.8 m/2.1 m
Art. No. 41442;41441

Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68301	Comfort incl. sheet metal panel
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel

GEDA® MULTILIFT P22

**Compact, pre-installed
base unit comprising:
car, enclosure, flat cable
bin and drive**

No foundations required

Modular system

**Low and easy access
height with and without
a cable trolley**

**Option: large C-door for
easy loading of big,
bulky goods**

**Automatic lubrication
device as a standard**

**Maintenance-friendly
design**





GEDA MULTILIFT P22

The GEDA Multilift P22 is the powerhouse of the Multilift range. Despite its high load capacity of 2000 kg or 22 passengers, it runs on only one mast of the proven GEDA VARIO-MAST system.

The optionally available 2.9 x 2.0 m (W x H) C-door allows convenient loading of the platform even with large, bulky construction materials.

The easy-maintenance design of the GEDA Multilift P22 is another advantage: all electronic components are accessible directly from the platform.

Thanks to the patented GEDA flat cable bin system, passengers and materials can be transported up to a height of 200 m quickly and safely. The special highlight: the GEDA Multilift P22 is operated with a cable trolley above a lifting height of 50 m. The trolley has a space-saving design so that the entry height at the lowest landing level is still at a comfortable 450 mm.

The already convenient operation of the passenger and material hoist is made even more simple and efficient with the optionally available intelligent call control.

The benefits of the Multilift range, such as an uncomplicated installation through the compact, pre-installed unit and installation without a separate foundation, complete the overall concept.

Technical data:



2000 kg
22 persons



200 m




54 m/min



**30 kW/380-480 V/
50-60 Hz/63 A**


Platform:

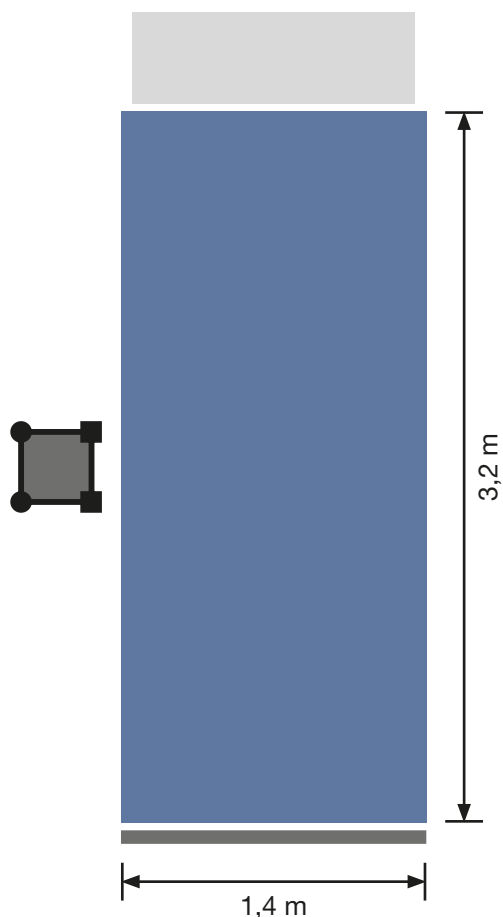

GEDA MULTILIFT P22

1 loading sliding door / 1 unloading ramp

Recommended landing level safety gates:



Comfort

Art. No. 01212



VARIO LITE

Art. No. 68200



VARIO/VARIO +

Art. No. 68000;68050



High and closed 1.8 m/2.1 m

Art. No. 41442;41441

Accessories:

For a wide range of
accessories visit:
www.geda.de



**Also with big
C-door available!**




Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68301	Comfort incl. sheet metal panel
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel

PRODUCT FINDER

All good things come in threes! Load capacity, lifting height, power connection – just three simple questions to find the right GEDA product for you. And are now a reality with the new Product Finder.

www.geda.de/en/products/PRODUCT-FINDER

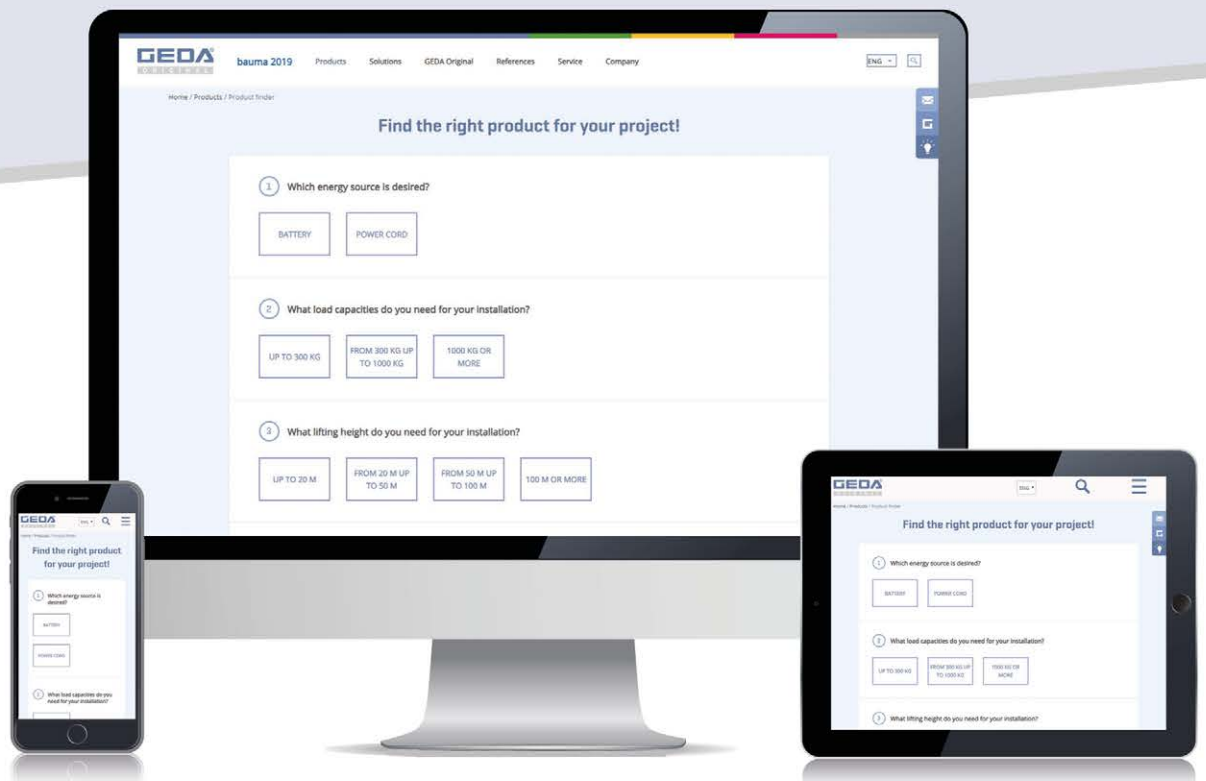

www.geda.de



IDE

GEDA® PH 2032




Single or twin design

Comprehensive control variants of the latest generation

Low, comfortable access height of 450 mm with cable trolley

Patented flat cable system

Flexible door system





GEDA PH 2032

The passenger and material hoists from the GEDA PH range meet the demands for high load capacities and great lifting heights.

The “smallest” among the three GEDA PH models, the GEDA PH 2032, offers a spacious 1.55 x 3.20 m platform for up to 25 passengers or materials with a total weight of 2000 kg.

With a lifting speed of 90 m/min, controlled by a frequency converter, the GEDA PH 2032 reaches a lifting height of up to 400 metres.


The frequency converter enables smooth starting and stopping with a low start-up current, which significantly reduces wear on the gear rack and the motor pinion.

The standard controls for landing pre-selection, automatic mode or fully automatic mode can be selected individually for each model from the GEDA PH series. Different door systems in combination with the suitable requested electrically/mechanically locking landing level doors complete the profile of the PH range.

The GEDA PH 2032 is available as a single-car version or as a double-car version.

GEDA® PH 2032 Single

*Also with big
C-door available!*

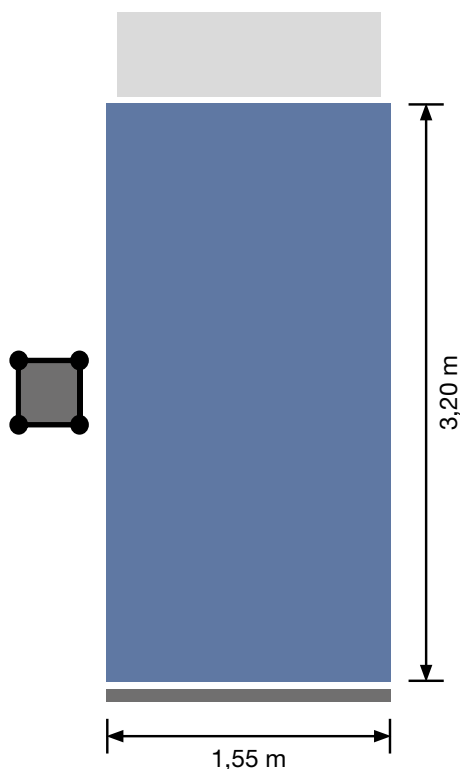

Technical data:



2000 kg
25 persons



400 m



90 m/min



**35-75 kW/380-480 V/
50-60 Hz/63-125 A**

Recommended landing level safety gates:



Comfort
Art. No. 01212



High and closed 1.8 m/2.1 m
Art. No. 41442;41441

Further landing level safety gates:


Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68301	Comfort incl. sheet metal panel
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel
Art. No. 68200	VARIO LITE



VARIO/VARIO +
Art. No. 68000;68050


Accessories:

For a wide range of
accessories visit:
www.geda.de



GEDA® PH 2032 Twin

*Also with big
C-door available!*

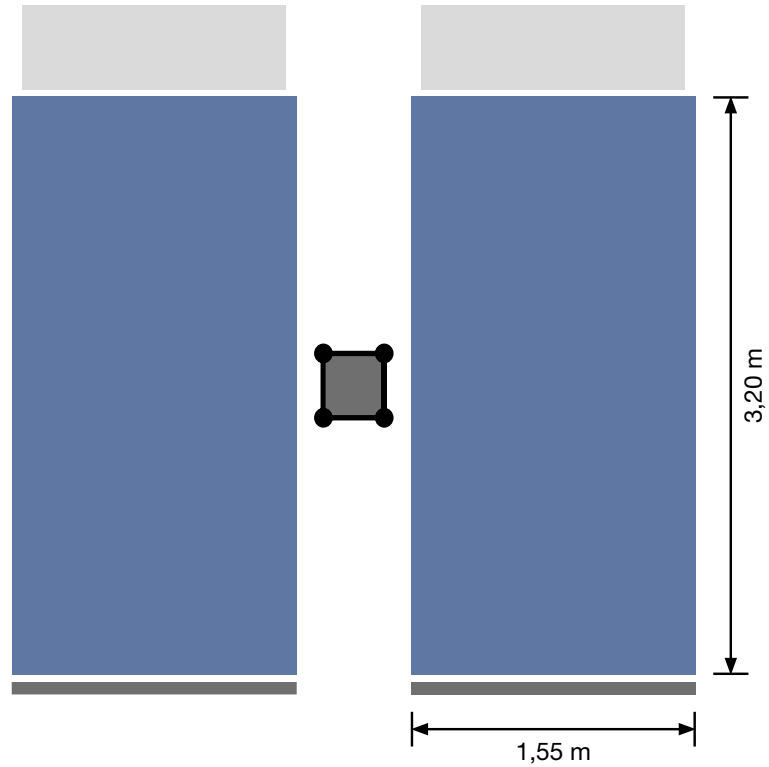

Technical data:



2 x 2000 kg
2 x 25 persons



400 m



90 m/min



**2 x 35-75 kW/380-480 V/
50-60 Hz/2 x 63-125 A**

GEDA® PH 2737



Single or twin design

**Comprehensive control
variants of the latest
generation**

**Low, comfortable access
height of 450 mm with
cable trolley**

Patented flat cable system

Flexible door system





GEDA PH 2737

Whether new building projects, façade work or extensive renovations – wherever heavy loads have to be transported to great heights, the GEDA PH 2737 passenger and material hoist is the ideal tool.


With frequency converter control, the GEDA PH 2737 achieves a lifting speed of 90 m/min and a lifting height of up to 400 m. It is approved for transporting 28 passengers or 2700 kg. The spacious 1.55 x 3.70 m platform allows even particularly bulky loads to be transported.

The standard controls for landing pre-selection, automatic mode or fully automatic mode can be selected individually for each model from the GEDA PH series. Different door systems in combination with the suitable requested electrically/mechanically locking landing level doors complete the profile of the PH range.

The GEDA PH 2737 is available as a single-car version or as a double-car version.

GEDA® PH 2737 Single

Also with big
C-door available!

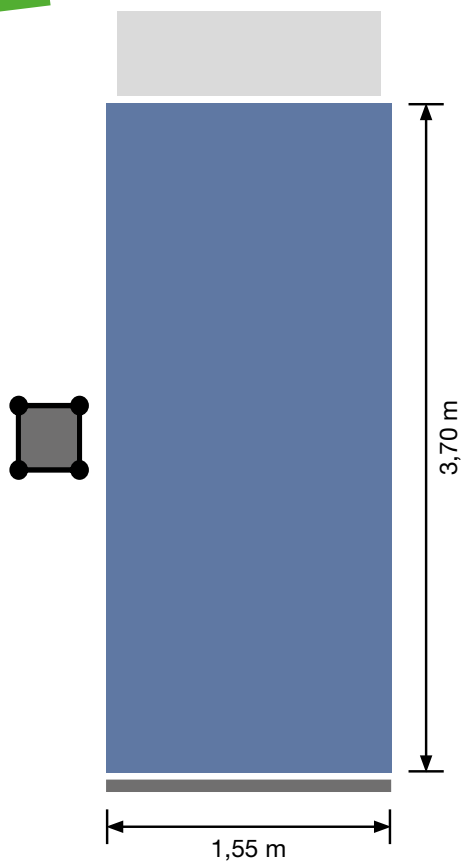

Technical data:



2700 kg
28 persons



400 m



90 m/min



**40-80 kW/380-480 V/
50-60 Hz/80-160 A**

Recommended landing level safety gates:



Comfort
Art. No. 01212



High and closed 1.8 m/2.1 m
Art. No. 41442;41441

Further landing level safety gates:


Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68301	Comfort incl. sheet metal panel
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel
Art. No. 68200	VARIO LITE



VARIO/VARIO +
Art. No. 68000;68050


Accessories:

For a wide range of
accessories visit:
www.geda.de



GEDA® PH 2737 Twin

*Also with big
C-door available!*

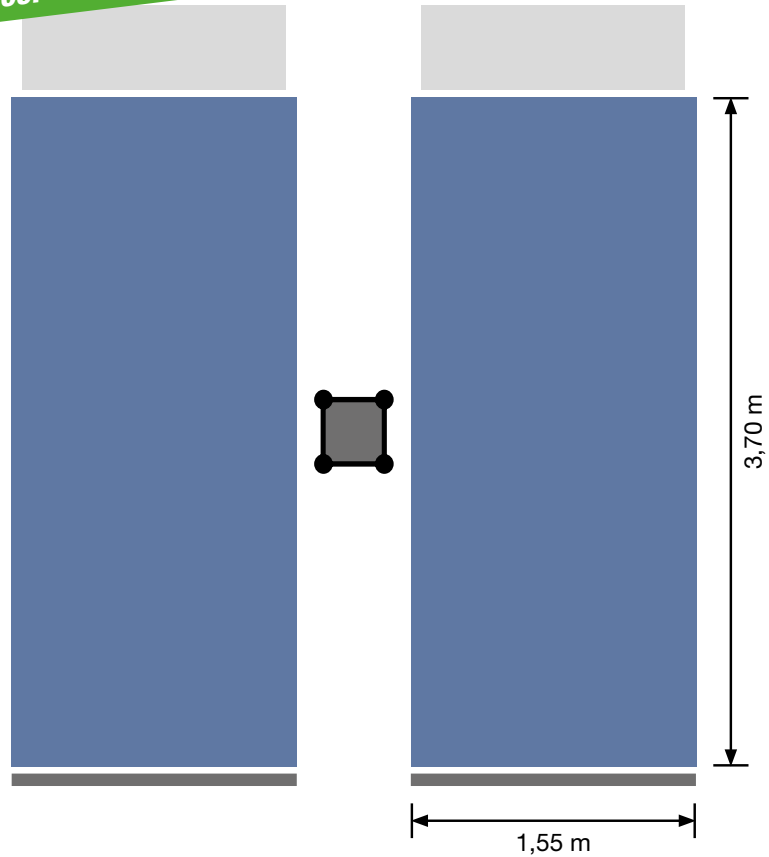

Technical data:



2 x 2700 kg
2 x 28 persons



400 m



90 m/min



**2 x 40-80 kW/380-480 V/
50-60 Hz/2 x 80-160 A**

GEDA® PH 3240


Single or twin design

**Comprehensive control
variants of the latest
generation**

**Low, comfortable access
height of 450 mm with
cable trolley**

Patented flat cable system

Flexible door system





GEDA PH 3240

The strongest model in the PH range, the GEDA PH 3240, is designed especially for transporting extremely heavy loads to great heights and ensures effective and safe transport of passengers and materials.

The 1.55 x 3.20 m platform offers space for up to 30 passengers or materials with a total weight of 3200 kg.


With a lifting speed of 90 m/min, controlled by a frequency converter, the GEDA PH 3240 reaches a lifting height of up to 400 m. The platform can accommodate even the heaviest and bulkiest construction materials.

The standard controls for landing pre-selection, automatic mode or fully automatic mode can be selected individually for each model from the GEDA PH series. Different door systems in combination with the suitable electrically/mechanically locking landing level doors complete the profile of the PH range.

For even more efficient working, the GEDA PH 3240 is available in a single-car version or a double-car version.

GEDA® PH 3240 Single

Also with big
C-door available!

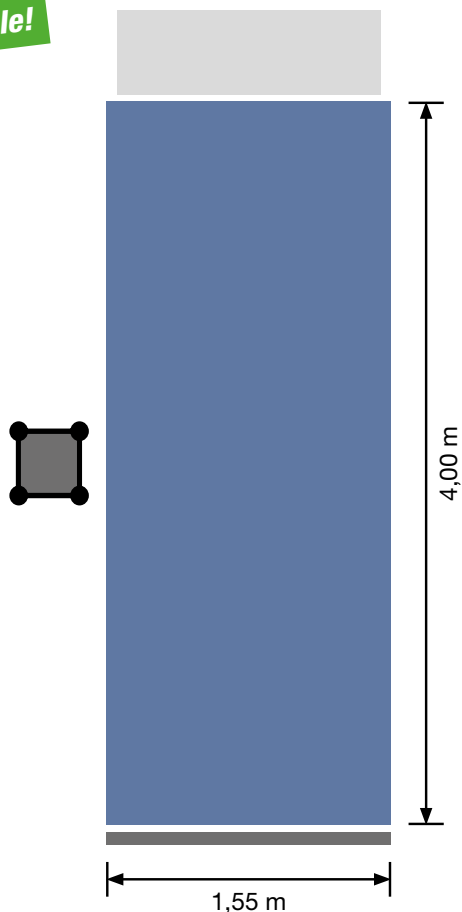

Technical data:



3200 kg
30 persons



400 m



90 m/min



**45-80 kW/380-480 V/
50-60 Hz/80-160 A**

Recommended landing level safety gates:



Comfort
Art. No. 01212



High and closed 1.8 m/2.1 m
Art. No. 41442;41441

Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68301	Comfort incl. sheet metal panel
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel
Art. No. 68200	VARIO LITE



VARIO/VARIO +
Art. No. 68000;68050


Accessories:

For a wide range of
accessories visit:
www.geda.de



GEDA® PH 3240 Twin

*Also with big
C-door available!*

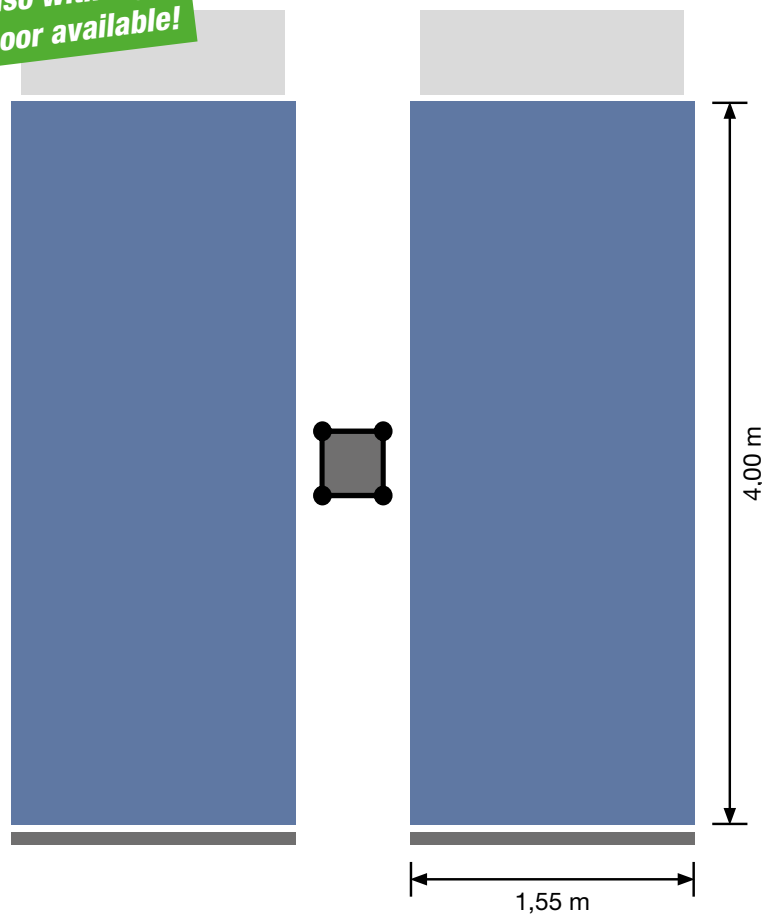

Technical data:



2 x 3200 kg
2 x 30 persons



400 m



90 m/min



2 x 45-80 kW/380-480 V/
50-60 Hz/2 x 80-160 A

GEDA BL 2000
Copenhagen
Denmark





GEDA® BL 2000



Single or twin design

**Comprehensive control
variants of the latest
generation**

**Low access height of 400
mm**

**The single version can be
transported on a lorry
as one unit**

**Display with
comprehensive functions
in the car**





GEDA BL 2000


Wherever heavy loads have to be transported to great heights, the new GEDA BL 2000 ensures the required efficiency in the construction process. The passenger and material hoist has a load capacity of 2000 kg or 23 passengers and a lifting speed of 55 m/min the new powerhouse from GEDA is available as a single variant and as a twin variant. The platform size of 1.45 x 3.20 x 2.10 m also allows transport of bulky goods up to a lifting height of 250 m. For added comfort and operating convenience, the hoist is equipped with comprehensive state-of-the-art control variants.

The GEDA BL 2000 is available in two variants: a Standard and a Premium model.

The Premium version impresses with a range of additional features. For example, the history of the actions performed with the hoist, such as start and stop time, error messages, load per journey etc., can be retrieved. Depending on the conditions at the construction site or on individual customer requirements, the GEDA BL 2000 Premium can be switched flexibly via the display from 2000 kg with 63 A to 1300 kg with 32 A, enabling the hoist to be used for a variety of applications.

An integrated wind sensor – shown on the display – ensures that if the wind conditions are too strong, the hoist is moved automatically to the ground station, providing an additional safety feature in particular for coastal construction sites.

GEDA® BL 2000 Single

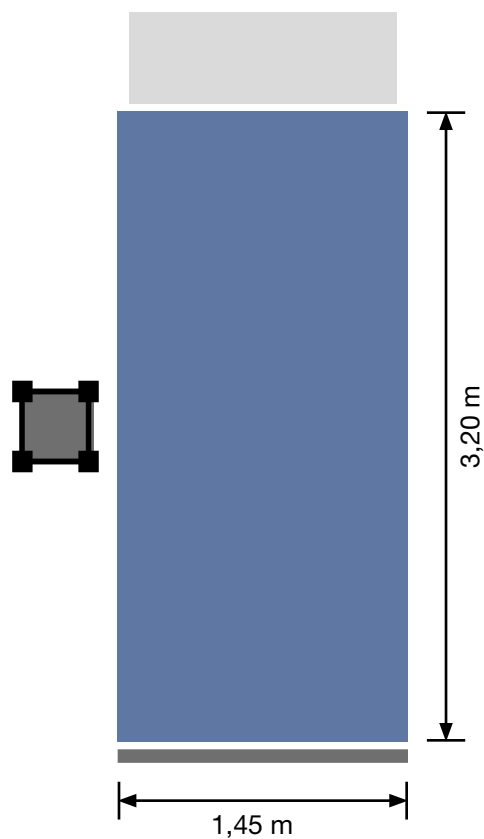

Technical data:



2000 kg
23 persons



250 m



55 m/min



**32 kW/380-480 V/
50-60 Hz/63 A**

Recommended landing level safety gates:



Comfort
Art. No. 01212



High and closed 1.8 m/2.1 m
Art. No. 41442;41441

Further landing level safety gates:


Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68301	Comfort incl. sheet metal panel
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel
Art. No. 68200	VARIO LITE




VARIO/VARIO +
Art. No. 68000;68050

Accessories:

For a wide range of
accessories visit:
www.geda.de



GEDA® BL 2000 Twin

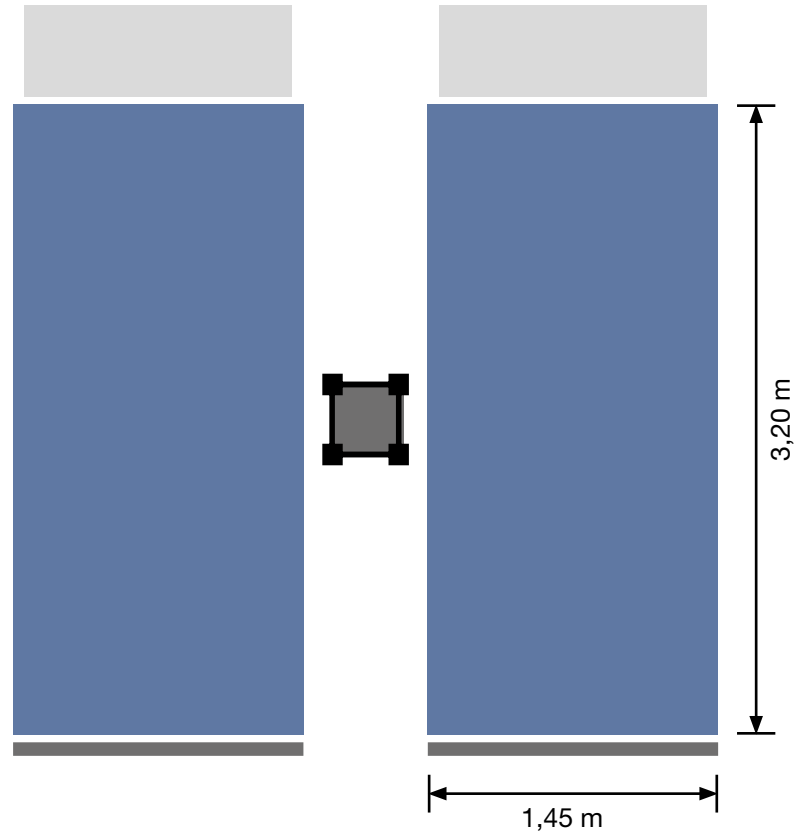

Technical data:



2 x 2000 kg
2 x 23 persons



250 m



55 m/min



**2 x 32 kW/380-480 V/
50-60 Hz/2 x 63 A**

GEDA® SBL 2000





**Specially designed for
non-European markets**

Single or twin design

Robust platform design

**Comprehensive
safety features**



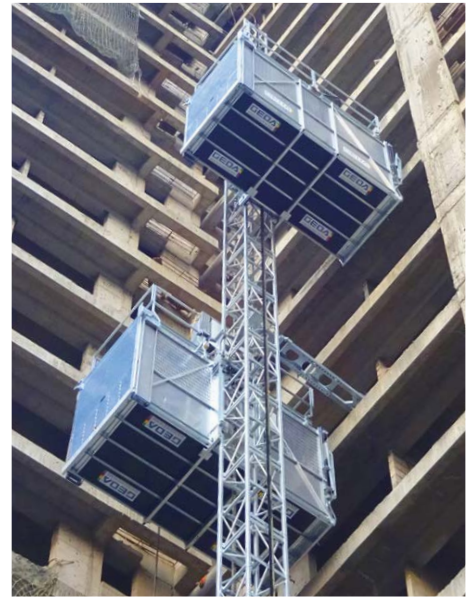


GEDA SBL 2000

Special solutions tailored exactly to individual building conditions are usually not required in markets outside Europe. In contrast to other, variably adjustable hoist solutions from GEDA, the new GEDA SBL 2000 is therefore only available with a fixed platform size of 3.20 x 1.45 x 2.10 m, a standard load capacity of 2000 kg and 23 passengers, a lifting speed of 55 m/min and a lifting height of 250 m.

And of course the GEDA SBL 2000 in no way lags behind other hoist solutions from the extensive GEDA range in terms of quality and safety. The GEDA SBL 2000 is a product ideally tailored to meet the requirements of target markets outside Europe, developed and manufactured entirely in Germany.

The GEDA SBL 2000 is available both as a single and as a twin cabin.

GEDA® SBL 2000 Single

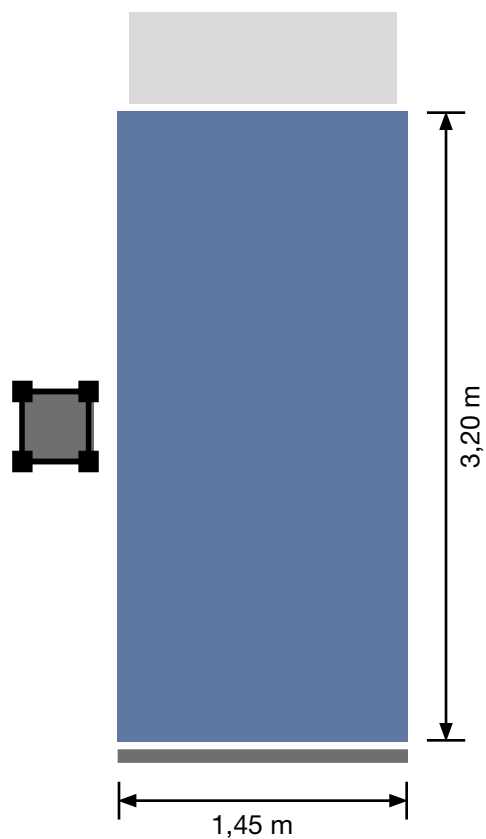

Technical data:



2000 kg
23 persons



250 m



55 m/min



**23 kW/380-480 V/
50-60 Hz/50 A**

Recommended landing level safety gates:



Comfort
Art. No. 01212

Further landing level safety gates:

Art. No. 01217	Standard
Art. No. 01268	Standard-Basic
Art. No. 68301	Comfort incl. sheet metal panel
Art. No. 68311	Standard incl. sheet metal panel
Art. No. 68312	Standard-Basic incl. sheet metal panel
Art. No. 68200	VARIO LITE




VARIO/VARIO +
Art. No. 68000;68050

Accessories:

For a wide range of
accessories visit:
www.geda.de



GEDA® SBL 2000 Twin

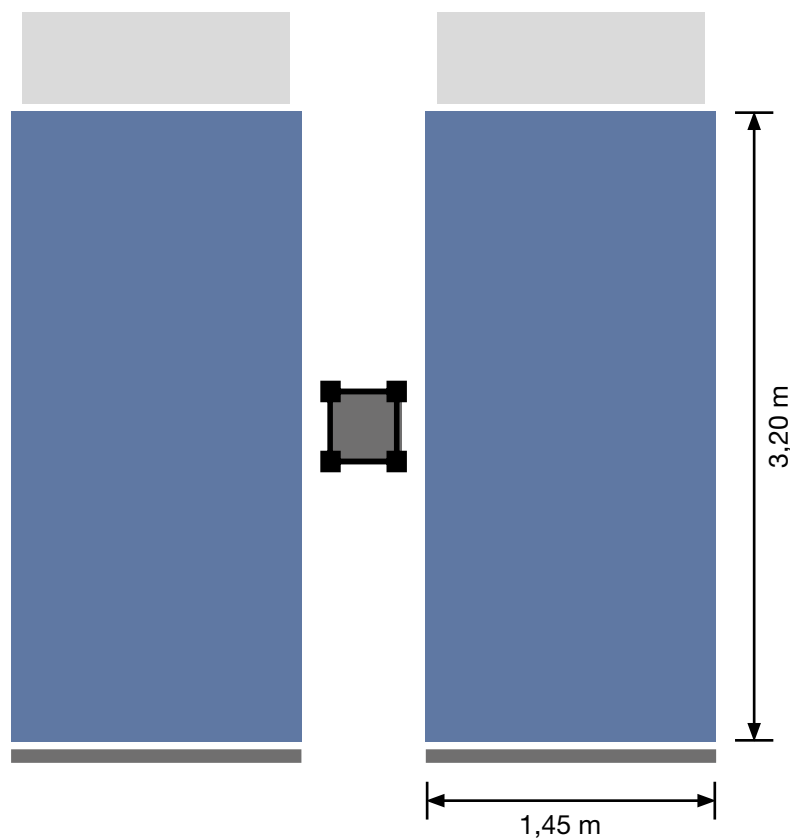

Technical data:



2 x 2000 kg
2 x 23 persons



250 m



55 m/min



**2 x 23 kW/380-480 V/
50-60 Hz/2 x 50 A**



GEDA 2 PK
*Paris
France*

K E S

GEDA® 2 PK



Flexible system: can be used universally for all crane brands



Full crane load thanks to movable mounts and lightweight aluminium structure

Easy handling, fast assembly

Maintenance-friendly design

Proven technology in use worldwide – Made in Germany



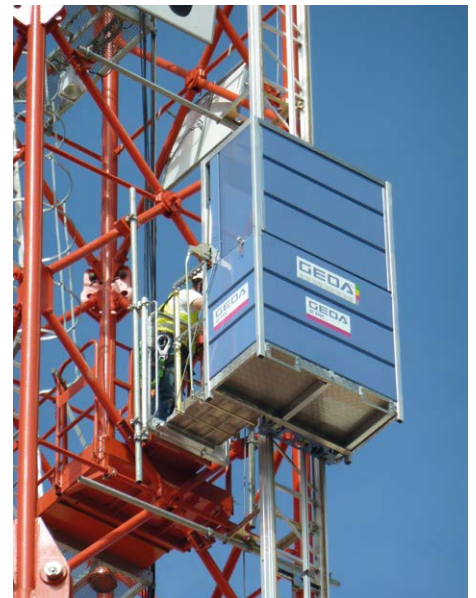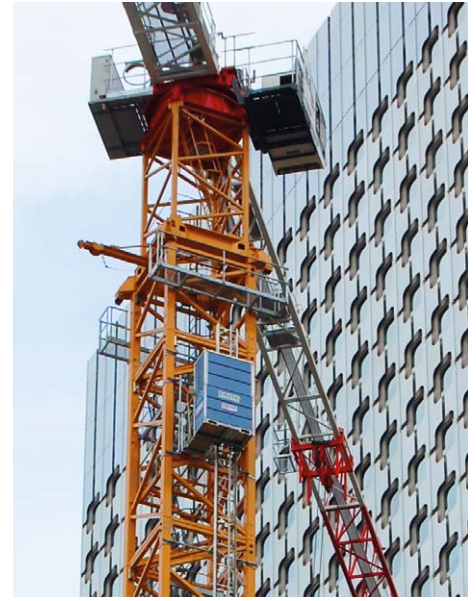

GEDA 2 PK

The GEDA 2 PK transports the crane operator to his workplace, quickly and, above all, safely. This means no more risky, arduous climbs in often poor weather conditions. The flexible system means the hoist can be installed on all crane types from all manufacturers, up to a height of 150 m as a standard.

Once the base unit of the rack and pinion hoist has been assembled and anchored, the aluminium ladder sections, weighing only 22 kg, are installed through the open cabin roof and easily mounted without screws, using the patented quick-release connections.

Comprehensive safety features complete the overall concept of the GEDA 2 PK. When opening the car, a small ramp with side protection folds down and, in conjunction with the access barrier on the crane, ensures safe access to the car. A speed-dependent safety gear guarantees safety, while electrical safety elements prevent operating errors.

The crane operator hoist can also act as a life saver in an emergency situation, as the recovery and rescue of unconscious or ill crane operators can be conducted very quickly with the GEDA 2 PK.

Technical data:



200 kg
2 persons



60/80/120/150 m




24 m/min



**1.5 kW/400 V/
50 Hz/16 A**

Platform:

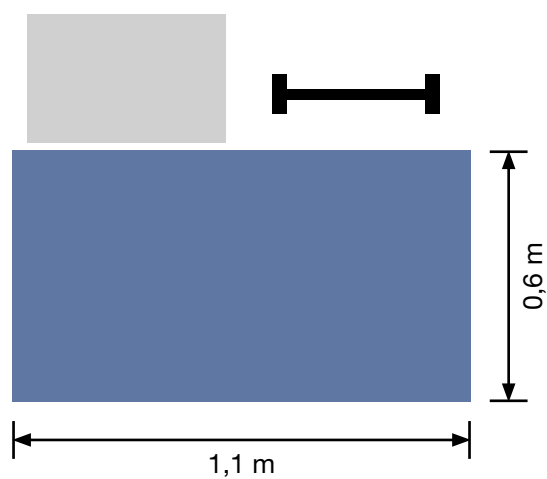

GEDA 2 PK

1 entrance and exit ramp

Accessories:

For a wide range of
accessories visit:
www.geda.de




Landing level safety gate:



2 PK
Art. No. 38100

**You can use the GEDA 2 PK
for ALL TYPES OF CRANES
of the different manufacturers!**

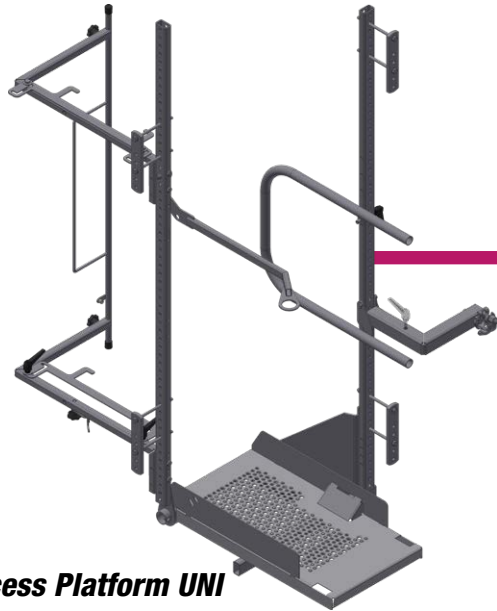

GEDA Access Platform UNI
for the safe access between
crane operator hoist and crane platform.



GEDA Crane Console UNI
to assemble the GEDA 2 PK
hanging on the crane



GEDA MCP 1500
Dresden
Germany



A tall building with a grey tiled facade is shown under renovation. A GEDA mast climbing platform is extended against the building. A worker in a white uniform and yellow helmet stands on the platform. The building has several balconies with white railings. A banner is visible on the left side of the building.

**RACK AND
PINION HOISTS**

MAST CLIMBING PLATFORMS

TEMPORARY INSTALLATIONS



GEDA® **MCP 750** **MCP 1500**

**Transports passengers to
their workplace quickly
and safely**


**Serves as a work platform
for several passengers**

GEDA UNI-X-MAST system

**Available as a single-mast
and double-mast variant**

**Modular design allows
flexible adaptation to
building shape**



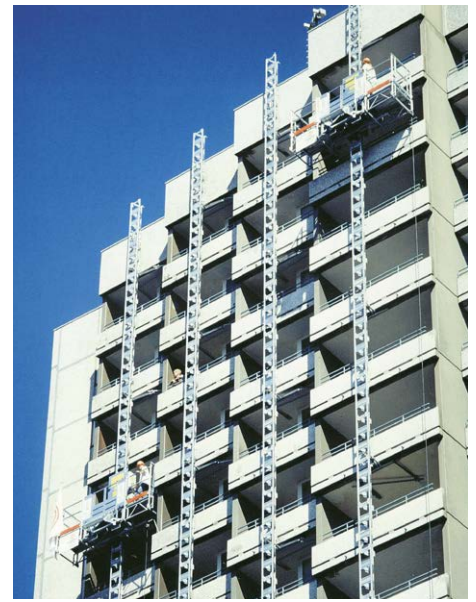

GEDA MCP

GEDA "electric scaffolds" – the GEDA MCP 750 and GEDA MCP 1500 mast climbing platforms – have several impressive features, such as ease of use and the simple assembly and disassembly. The advantages already become evident during installation. For assembly of the pedestal for example, standard scaffolding elements such as girders, scaffold planks, guard rails and toe boards can be used.

Using the well-known GEDA UNI-X-MAST segments with captive screws, the subsequent assembly can be undertaken directly from the platform.

The platforms allow ergonomic and comfortable working as the device can be flexibly positioned along the façade. The platform also has a power supply point for working with electric tools.

When compared with traditional scaffolding, the use of mast climbing platforms has other significant benefits. Wall surfaces, for example, can be worked on freely as there are no vertical tubes preventing access. Furthermore, investment costs remain low, space saving transport of individual elements is possible and maximum safety and stability are guaranteed, all with low installation effort.

Mast climbing platforms are also popular for use on rental buildings. The platform is only located where work is actually going on, so that no unnecessary tarpaulins conceal the view or block the light for other tenants.

Technical data:



750 kg
1500 kg



100 m





9 m/min




**2.2 kW/400 V/
50-60 Hz/16 A**



GEDA MCP 750 (single mast)
Platform width up to 5.6 m

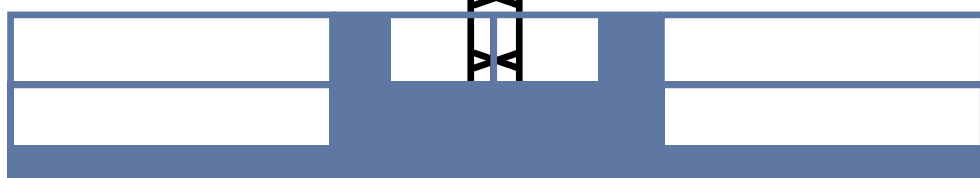

**GEDA quality realized in the
modular system principle!**

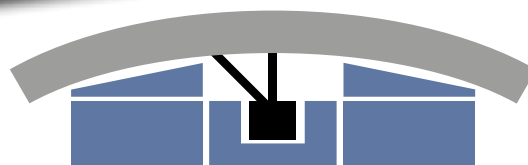


**STANDARD
SCAFFOLD
ELEMENTS!**

GEDA MCP 1500 (double mast)
Platform width extendable up to 16.7 m

Accessories:

For a wide range of
accessories visit:
www.geda.de



INDUSTRIAL ELEVATORS

SERVICE HOISTS

PERMANENT INSTALLATIONS







Versatile pallet on standard models including explosion protection and stainless steel variants

Specially developed for use in various industries



Also suitable for extreme ambient and climate conditions

No machine room required

Patented flat cable system

Customer-specific special solutions available



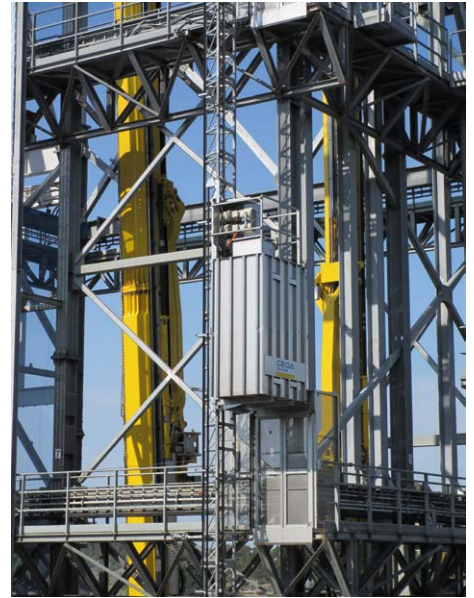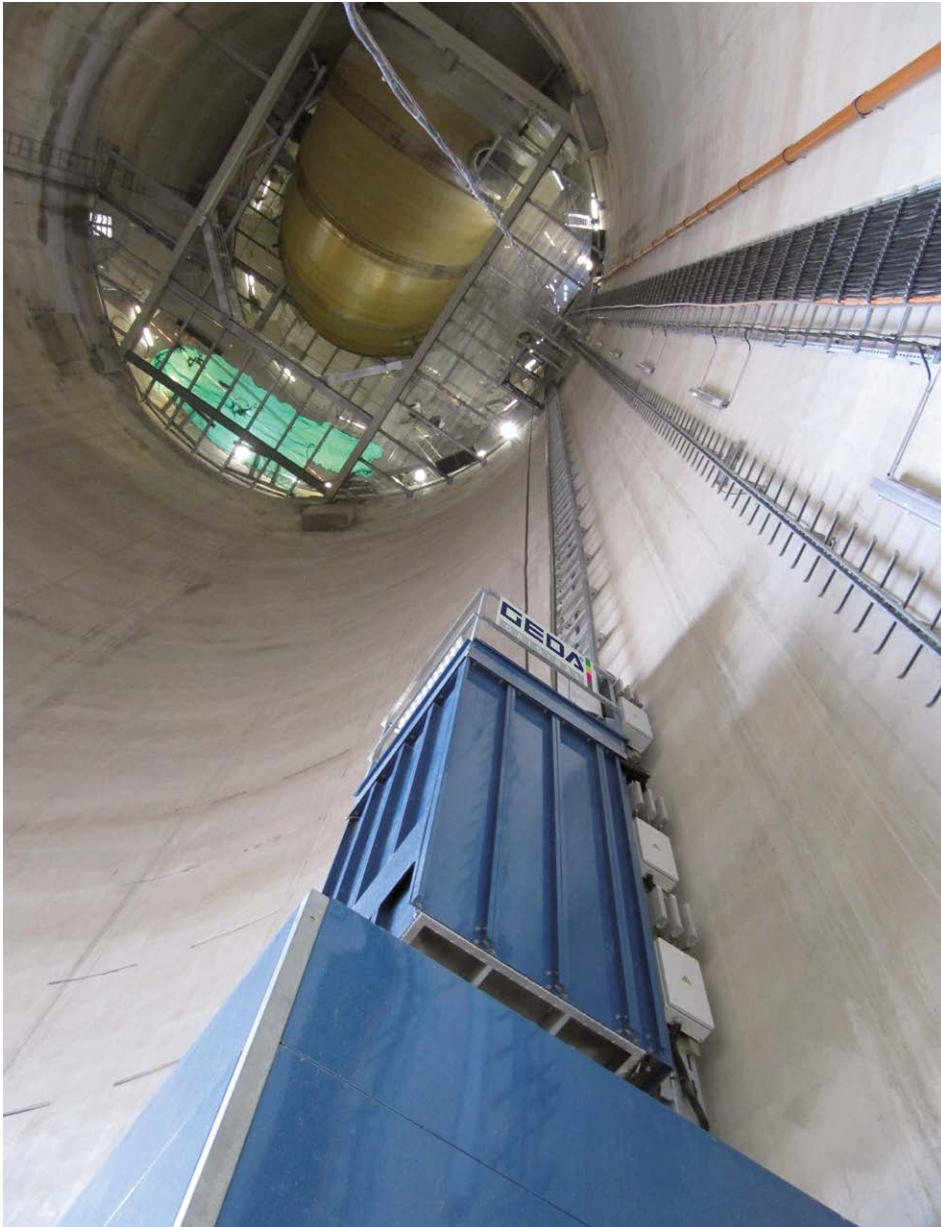

GEDA SH

GEDA industrial hoists – unique variety and efficiency made in Germany. GEDA industrial hoists ensure smooth, efficient and safe transport of passengers and materials exactly where required. Even in the toughest of conditions, GEDA products impress customers due to their unique quality and modern car design. The versatile application options of GEDA industrial hoists range from cement works, asphalt mixing plants and chemical plants to cooling towers, silos, off-shore plants and explosion-protected areas. Industrial hoists create huge time and cost savings due to efficient workflows in maintenance and service processes. The GEDA SH standard hoist range covers load capacities from 400 to 3200 kg. The modular design also provides customers with a choice of different car dimensions and lifting speeds of up to 60 m/min. Special customized solutions can be implemented and tailored precisely to the requirements on site, with state-of-the-art engineering and professional project management.

Technical data:




400-3200 kg
5-42 persons




0-400 m




0-60 m/min



Project specific

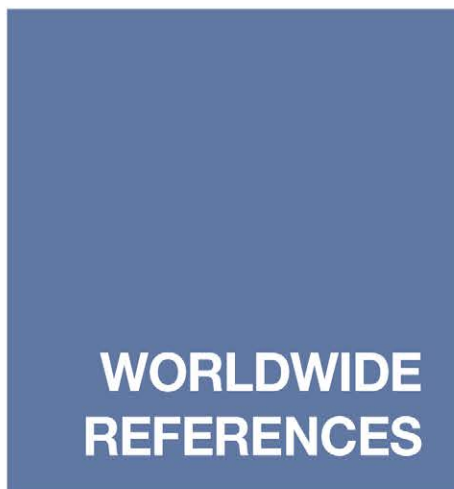

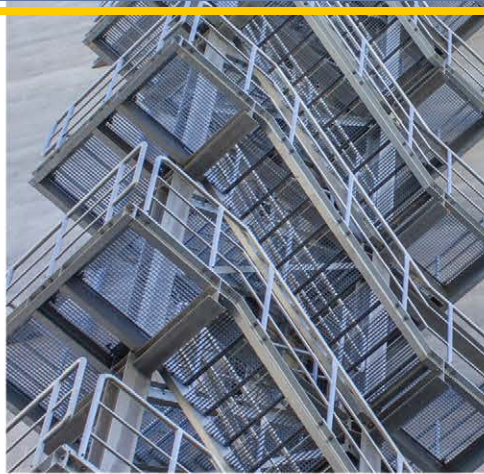

**DISCOVER
THE WORLD
OF THE GEDA
INDUSTRIAL
ELEVATORS**



www.geda.de/en/solutions/industry



The background image shows an industrial workshop or factory floor. In the foreground, there are several metal workbenches with perforated metal tops. A mobile work cart with a blue toolbox and various tools is visible. In the background, there are industrial structures, including a red overhead crane system with a yellow hoist and a silver tool hanging from it. The floor is made of metal grating.

INDUSTRIAL ELEVATORS MATERIAL HOISTS

PERMANENT INSTALLATIONS



GEDA 1200 ZM P
Factory hall, Ulm
Germany

GEDA® 850 ZM P




**Robust, durable material
hoist**

**Maintenance-friendly
design**

No machine room required

GEDA UNI-X-MAST system

**Automatic lubrication
device as a standard**





GEDA 850 ZM P

The GEDA 850 ZM P material hoist is installed as a useful transport system in the warehousing and logistics functions of many different sectors.

The spacious upward opening platform provides space for up to 850 kg of materials and transports all goods safely and efficiently up to heights of 100 m. At the touch of just one button the material hoist takes over that energy-sapping dragging.

For a limited number of instructed users, the GEDA 850 ZM P can be installed on machines and on buildings in non-public areas. A separate TÜV acceptance is not required.

Technical data:



850 kg



100 m




**9 m/min
12 m/min
24 m/min**



**2.5 kW/400 V/
50 Hz/16 A**

Platform:

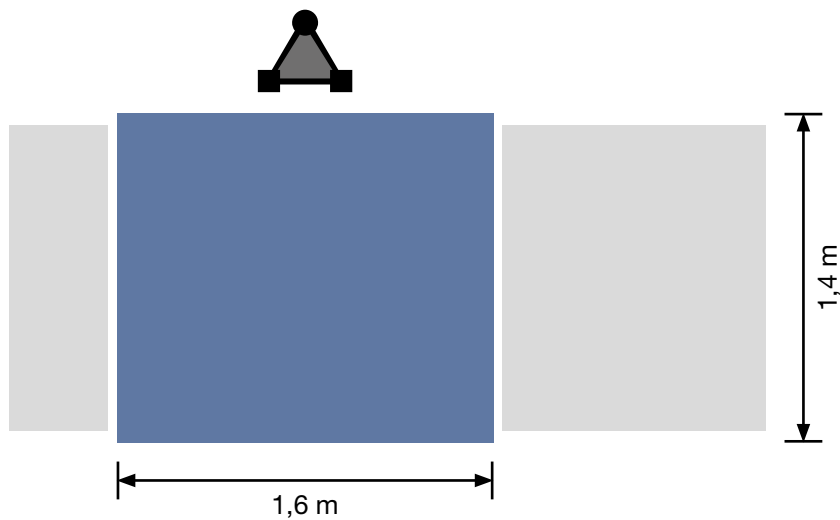

GEDA 850 ZM P

1 loading ramp / 1 unloading ramp

Accessories:

For a wide range of
accessories visit:
www.geda.de



Landing level safety gate:

For every project
the suitable
landing level safety gate -
we are happy to advise you!

PRODUCT VARIANTS

And to retain an overview! Whatever the diverse requirements and challenges posed by construction sites, GEDA has the flexible and adaptable height access solutions to match. And to back this up for each product the new website has an overview of all the variants which can also be compared against each other.

PRODUCT VARIANTS



www.geda.de

GEDA® 1200 ZM P



**Large loading volume –
allows convenient
transport of all types of
materials**

**Extensive range of
platform variants**

**Robust, durable material
hoist**

**Maintenance-friendly
design**

No machine room required

**Automatic lubrication
device as a standard**





GEDA 1200 ZM P

Whenever heavier loads need to be transported, the GEDA 1200 ZM P material hoist is a practical and efficient transportation system.

The GEDA VARIO-MAST system is easy to assemble directly from the platform up to an installation height of 100 m. The easy-to-handle 1.5 metre high steel mast with captive screws and secured nuts can be quickly set up without the assistance of a crane. Despite the high load capacity of 1500 kg the transport platform is guided on only one mast.

The transportation of bulky goods is no problem due to the spacious and upward opening loading platform. The GEDA 1200 ZM P has three different platform variants and can therefore be easily adapted to on-site conditions.

For a limited number of instructed users, the GEDA 1200 ZM P can be installed on machines and on buildings in non-public areas. A separate TÜV acceptance is not required.

Technical data:



1500 kg



100 m




**9 m/min
12 m/min
24 m/min**




**2 x 3.0/6.1 kW/400 V/
50 Hz/32 A**

Platform:

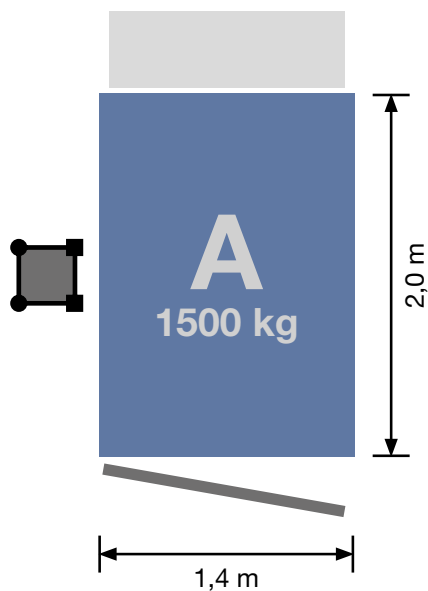

GEDA 1200 ZM P platform A
1 loading door / 1 unloading ramp

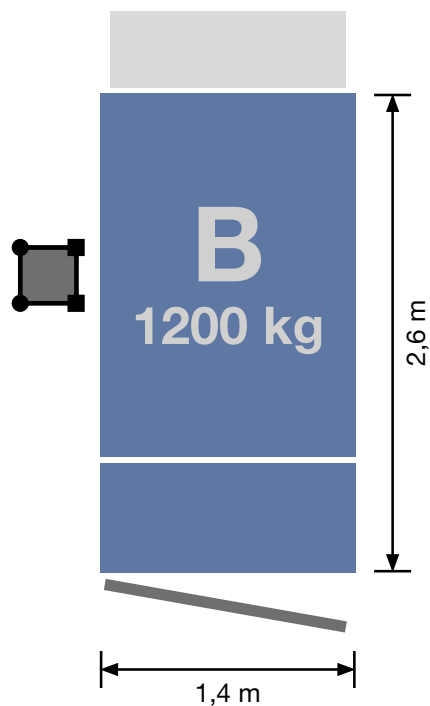


GEDA 1200 ZM P platform B
1 loading door / 1 unloading ramp


Accessories:

For a wide range of
accessories visit:
www.geda.de



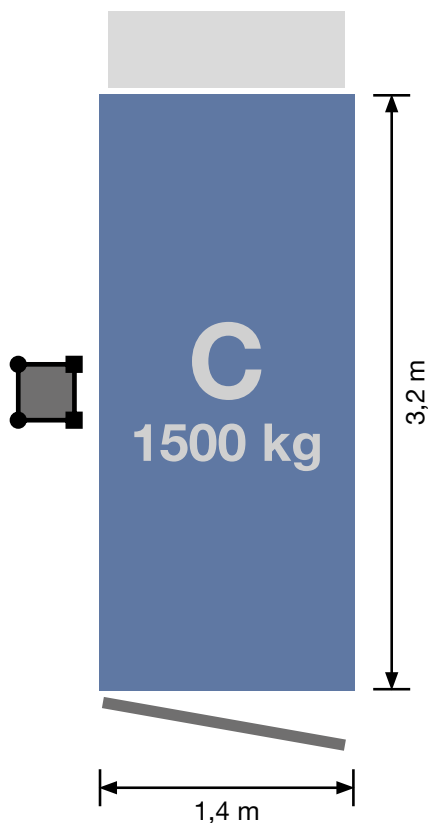

GEDA 1200 ZM P platform C 1500 kg
1 loading door / 1 unloading ramp

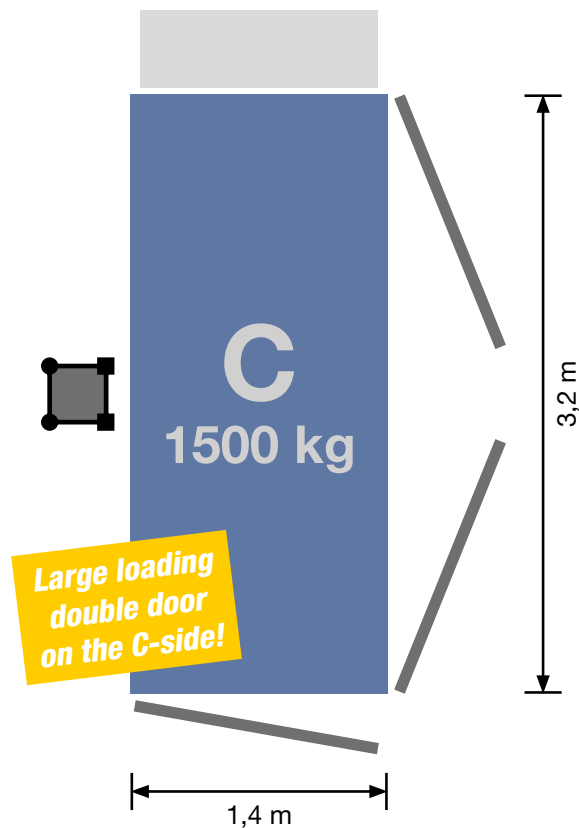

GEDA 1200 ZM P platform C 1500 kg
1 loading door / 1 loading double door / 1 unloading ramp

Landing level safety gate:

For every project the suitable landing level safety gate - we are happy to advise you!



INDUSTRIAL ELEVATORS TRANSPORT PLATFORMS

PERMANENT INSTALLATIONS

GEDA® 300 ZP P

Particularly space-saving

Folding platform

Facilitates and accelerates regular inspection, maintenance and repair work

Robust, durable material hoist

Maintenance-friendly design

No machine room required

Break-off safety for flat cable as a standard

GEDA UNI-X-MAST System

Innovative flat cable system

Automatic lubrication device as a standard





GEDA 300 ZP P

Powerful, compact, foldable – the GEDA 300 ZP P combines all these features in one permanently installable transport platform. These platforms can be deployed to support the whole spectrum of warehousing and logistics functions as well as maintenance and repair operations on industrial plants.

The permanently-installed hoist reliably and safely transports up to 500 kg or 3 people upwards and downwards. Its lifting speed of 12 m/min in material and 9 m/min in people mode, along with its height of up to 50 m round off this solution. The benefits of the GEDA 300 ZP P become particularly clear when it has to be used in confined spaces, as thanks to the foldable platform and compact, robust design, it can be used virtually everywhere. Retrofitting on existing façades or to a scaffolding can be achieved with minimum effort, since no shaft, machine room or specific support construction is required.

Technical data:



500 kg
3 persons



50 m




9 m/min
12 m/min




1.9 kW/400 V/
50 Hz/16 A

Platform:

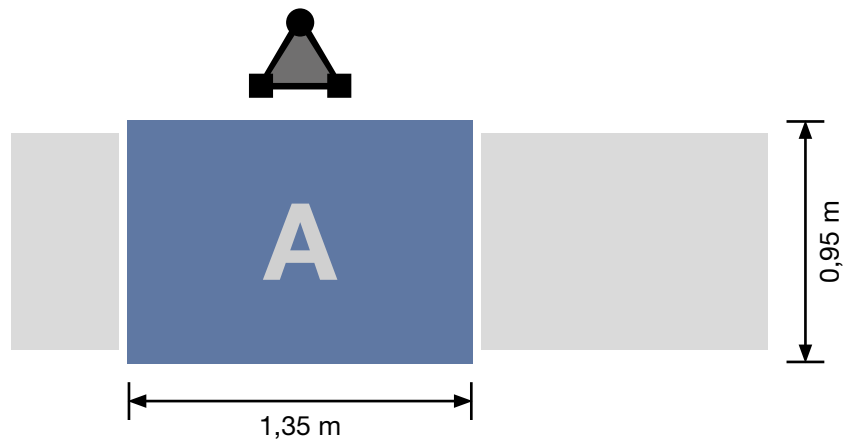

GEDA 300 ZP P platform A

1 loading ramp / 1 unloading ramp

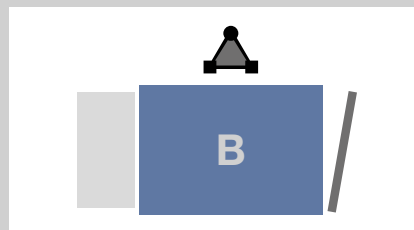

Accessories:

For a wide range of
accessories visit:
www.geda.de




Landing level safety gate:

For every project
the suitable
landing level safety gate -
we are happy to advise you!

Filters

The clear filter system restricts or expands the search results on each product page of the new www.geda.de with just a couple of easy inputs.

www.geda.de/en/PRODUCTS

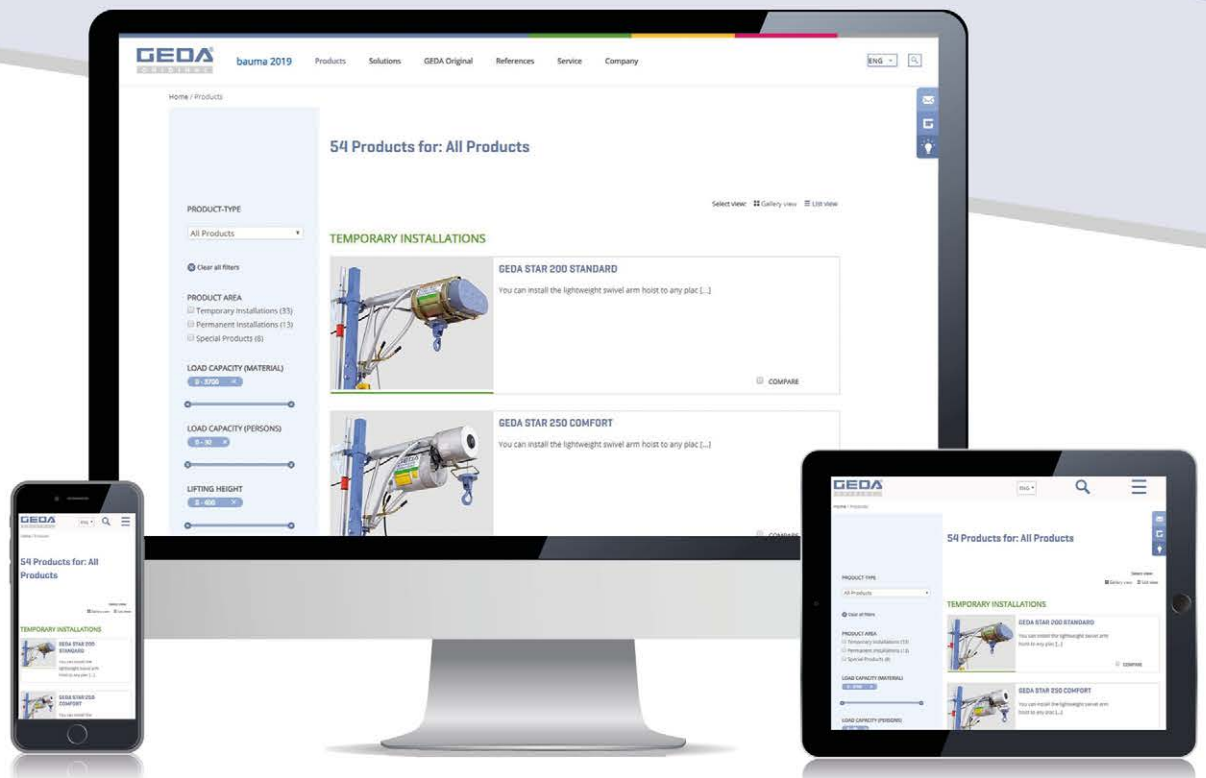

www.geda.de

GEDA® 500 ZP P

Your powerful partner for heavy loads and efficient working

Extensive range of platform variants

Robust, durable material hoist

Maintenance-friendly design

No machine room required

Facilitates and accelerates regular inspection, maintenance and repair work

GEDA UNI-X-MAST system

Automatic lubrication device as a standard





GEDA 500 ZP P

Whether to support maintenance and repair work or for practical transportation assistance for warehousing/logistics functions, the robust design of the GEDA 500 ZP P permanent transport platform has been specifically adapted to meet the broadest of industrial requirements and also to cope with the toughest conditions such as high dust accumulation and heat development.

The three different platform variants each have a payload of 500 kg or five people and this ensures that the transport platform can be adapted specifically to on-site conditions and also enables the safe transportation of heavy and bulky parts. The installation of the transport platform results in huge time and cost savings and is an excellent alternative to the stair tower, as with its lifting speed of 9 m/min in people mode and 12 m/min in material mode the rapid transportation of people and materials up to heights of 100 m is guaranteed.

Technical data:



500 kg
5 persons



100 m




9 m/min
12 m/min
24 m/min





3 kW/400 V/
50 Hz/16 A

Platform:

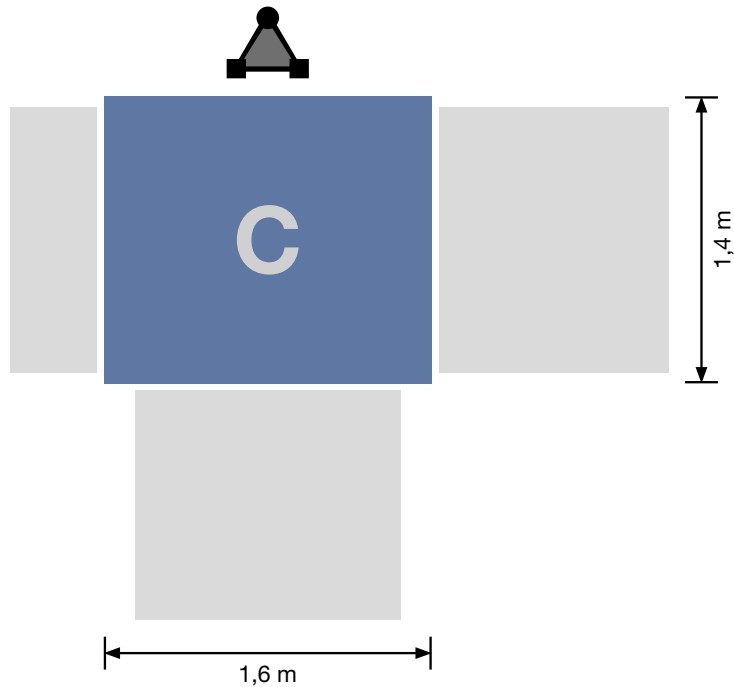

GEDA 500 ZP P platform C

2 loading ramps / 1 unloading ramp

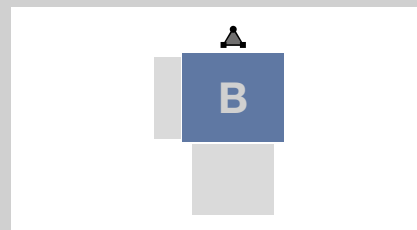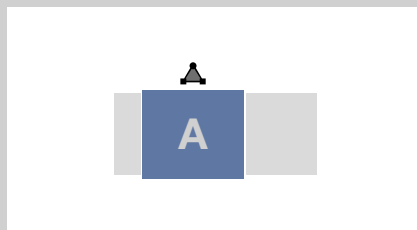

Accessories:

For a wide range of
accessories visit:
www.geda.de




Landing level safety gate:

For every project
the suitable
landing level safety gate -
we are happy to advise you!

ACCESSORIES

*All the relevant accessories you
need for each product will be
clearly displayed on the new
www.geda.de.*

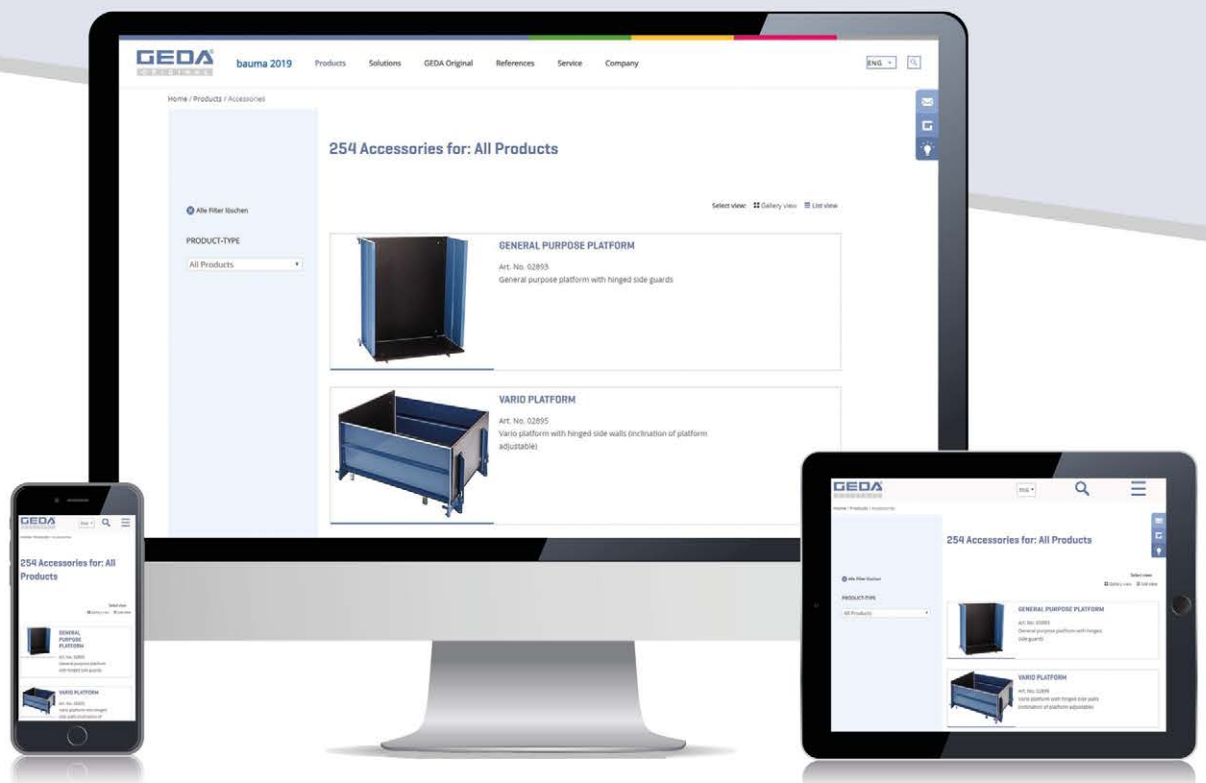

www.geda.de

GEDA® 1200 ZP P

**Large loading volume –
allows convenient
transport of all types of
materials**

**Extensive range of
platform variants**

**Robust, durable material
hoist**

**Maintenance-friendly
design**

No machine room required

**Facilitates and accelerates
regular inspection, main-
tenance and repair work**

**Automatic lubrication
device as a standard**





GEDA 1200 ZP P

The permanently installed GEDA 1200 ZP P transport platform is the strong and versatile partner for heavy loads and efficient working. People and materials are conveyed quickly, but primarily safely, upwards and downwards.

Its wide range of industrial applications include asphalt mixing systems, power stations, cement works, chemical plants as well as in the warehousing and logistics sector.

The flexible system enables the GEDA 1200 ZP P transport platform to adapt to individual customer requirements and on-site conditions. Therefore in addition to the three different speed variants, there is also an extensive range of platform versions. The highlight of the GEDA 1200 ZP P transport platform is that despite the high load capacity of 1500 kg it is guided on only one mast which only requires low anchoring forces on the façade or on the scaffolding construction.

Technical data:



1500 kg
7 persons



150 m




9 m/min
12 m/min
24 m/min




2 x 3 kW/400 V/
50 Hz/32 A

Platform:

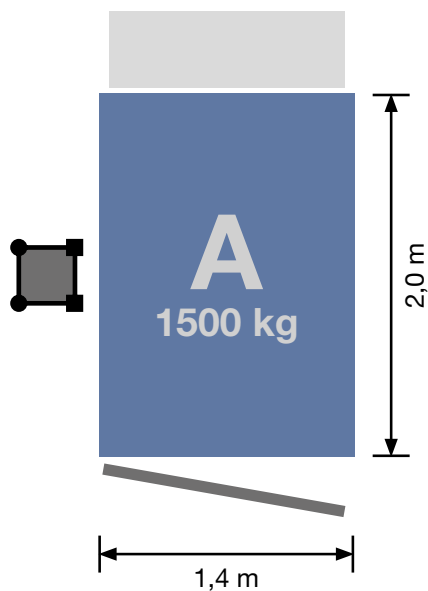

GEDA 1200 ZP P platform A
1 loading door / 1 unloading ramp

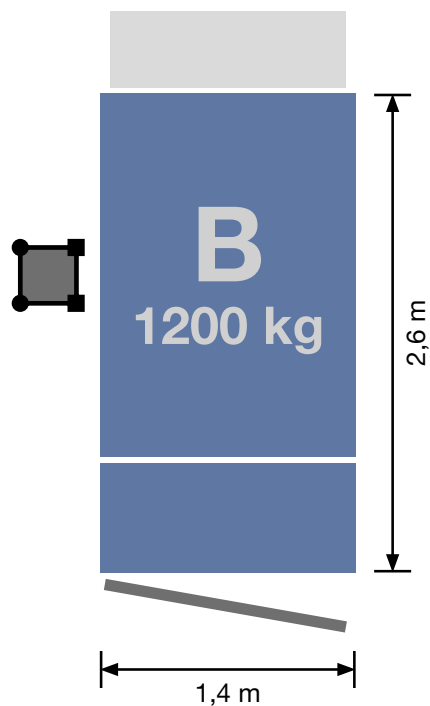


GEDA 1200 ZP P platform B
1 loading door / 1 unloading ramp


Accessories:

For a wide range of
accessories visit:
www.geda.de



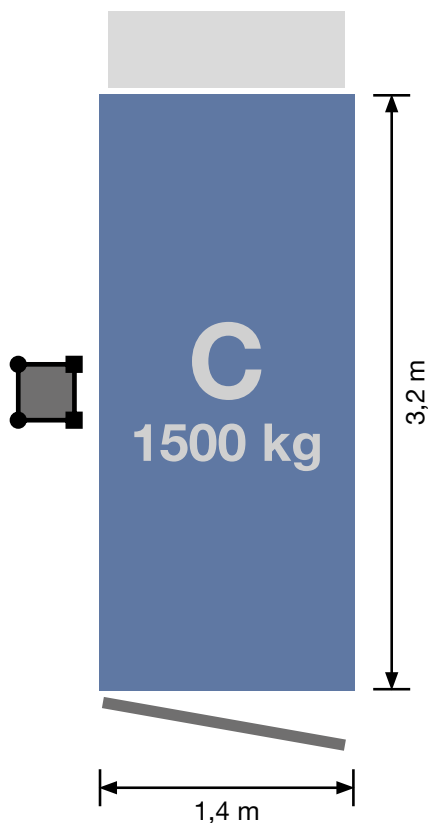

GEDA 1200 ZP P platform C 1500 kg
1 loading door / 1 unloading ramp

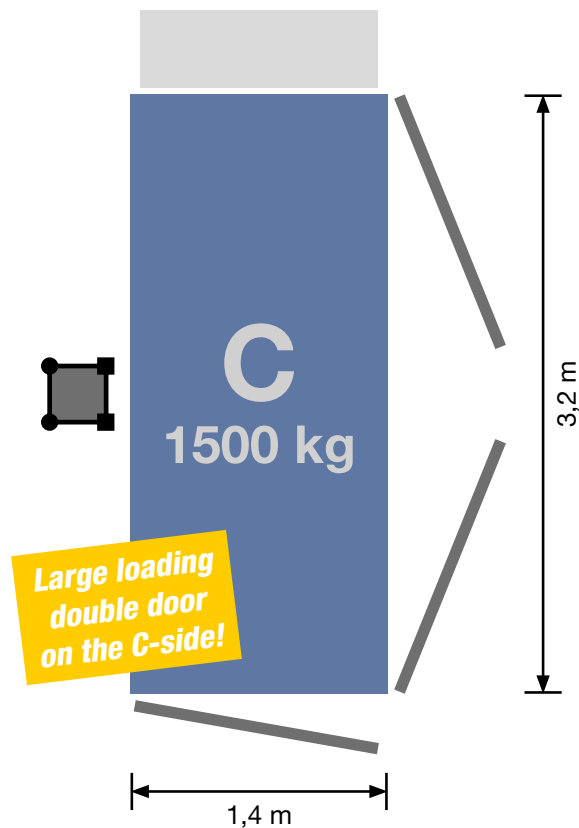

GEDA 1200 ZP P platform C 1500 kg
1 loading door / 1 loading double door / 1 unloading ramp

Landing level safety gate:

For every project the suitable landing level safety gate - we are happy to advise you!

GEDA® 1500 ZP P

**Large loading volume –
allows convenient
transport of all types of
materials**

**Flexible – the right plat-
form variant for any
construction site situation**

**Robust, durable material
hoist**

**Maintenance-friendly
design**


No machine room required

**Facilitates and accelerates
regular inspection, main-
tenance and repair work**

GEDA UNI-X-MAST system

**Automatic lubrication
device as a standard**



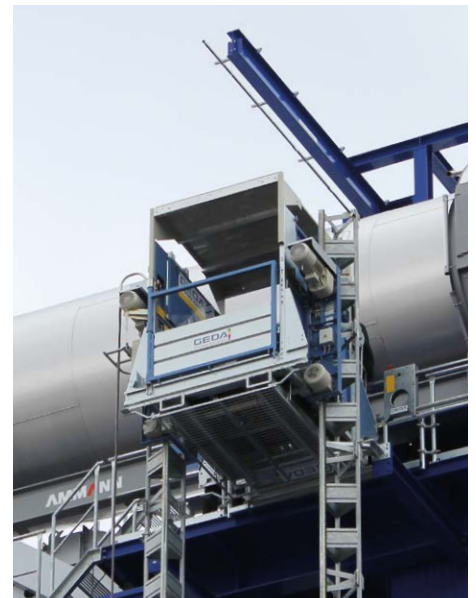

GEDA 1500 ZP P

The GEDA 1500 ZP P is the powerpack of the permanently installable transport platforms and can transport up to 2000 kg or seven people up to heights up to 100 m.

Guided on two masts, only low anchoring forces are required on the façade or scaffolding construction. The four different platform variants of the GEDA 1500 ZP P show that it has been designed to be flexible in its use. Often installed for maintenance and repair works in many different industry sectors as well as in the warehousing and logistics sectors, the GEDA 1500 ZP P both facilitates and accelerates the work processes and delivers both people and materials quickly and safely to the right place.

The specific highlight of this platform is that it has been designed so the user can convert it himself – depending on the installation site and purpose.

Technical data:



2000 kg
7 persons



100 m




9 m/min
12 m/min
24 m/min




2 x 3 kW/400 V/
50 Hz/32 A

Platform:

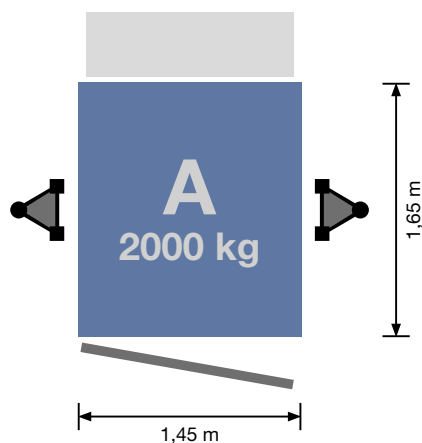

GEDA 1500 ZP P platform A
1 loading door / 1 unloading ramp

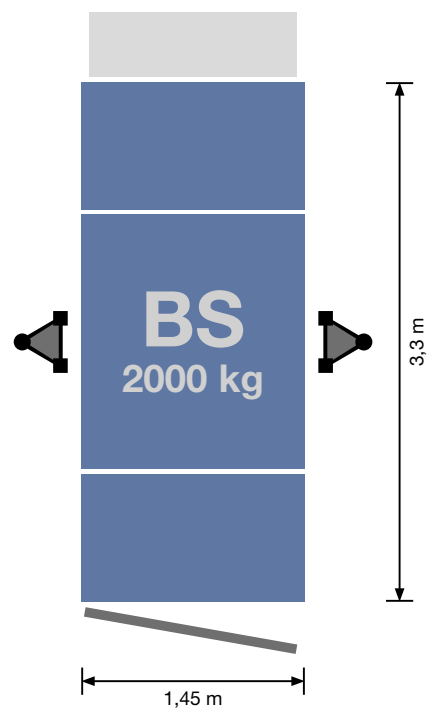


GEDA 1500 ZP P platform BS
1 loading door / 1 unloading ramp

Accessories:

For a wide range of
accessories visit:
www.geda.de




Platform:

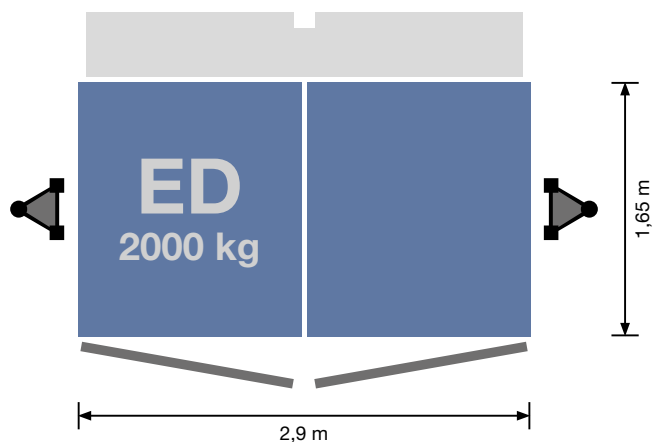

GEDA 1500 ZP P platform ED

2 loading doors / 1 unloading double ramp

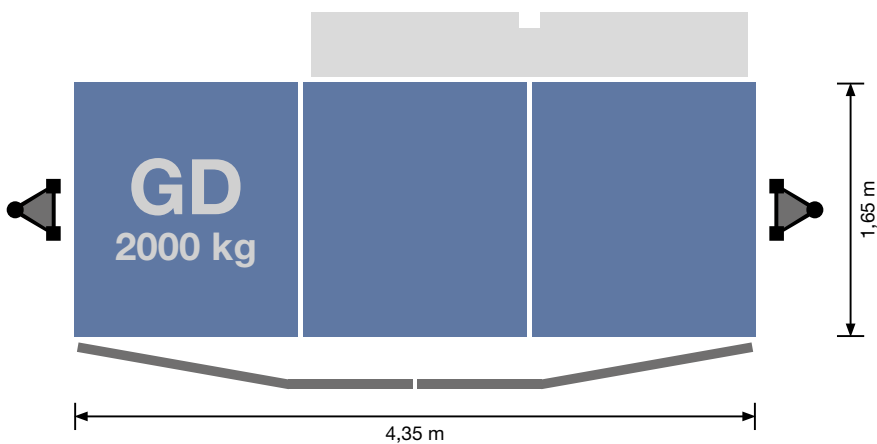

GEDA 1500 ZP P platform GD

2 loading doors / 1 unloading double ramp

Landing level safety gate:

For every project the suitable landing level safety gate - we are happy to advise you!

WORLDWIDE REFERENCES





A low-angle, upward-looking photograph of a complex industrial structure, likely an elevator shaft or material hoist. The structure is composed of dark grey metal beams, cross-braces, and perforated metal grates. The perspective creates a sense of height and industrial scale. A bright yellow rectangular box is superimposed over the center of the image, containing white text.

INDUSTRIAL ELEVATORS PERSONNEL AND MATERIAL HOISTS

PERMANENT INSTALLATIONS



GEDA® MULTILIFT P12 P


**Compact, pre-installed
base unit comprising:
car, enclosure, flat cable
bin and drive**

Modular system

**Facilitates and accelerates
regular inspection, main-
tenance and repair work**

**Break-off safety for flat
cable as a standard**



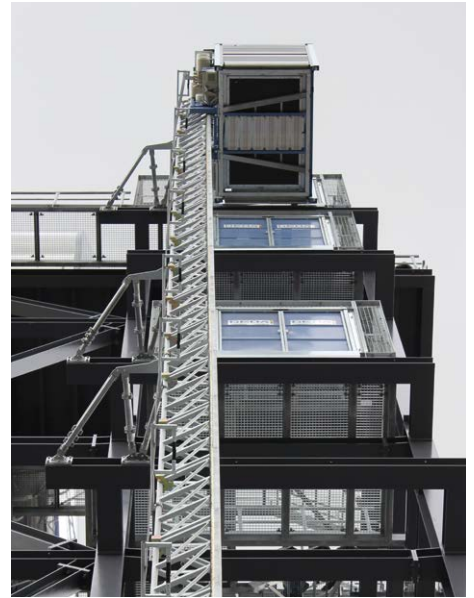

GEDA MULTILIFT P12 P

Customised specifically for industrial requirements such as for maintenance and repair work in asphalt mixing systems, cement works etc., the GEDA Multilift P12 P persons and materials hoist can transport up to 1500 kg or 12 people to a height of 150 m, thus combining all the benefits of the proven GEDA Multilift range in a permanently installed hoist solution.

The GEDA Multilift P12 P can be controlled from all loading and unloading points, the car and also the ground station. The three different versions of the platform give it the flexibility to be adapted to on-site conditions.

Despite the high load capacity, the GEDA Multilift P12 P is guided by only one mast from the GEDA VARIO-MAST system which only requires low anchoring forces on the façade or scaffolding construction.

A break-off safety for the flat cable is included in the delivery scope, so if the cable were to get caught, a limit switch prevents damage to the trailing cable.

Technical data:



1500 kg
12 persons



150 m




40 m/min




**15 kW/400 V/
50 Hz/32 A**


Platform:

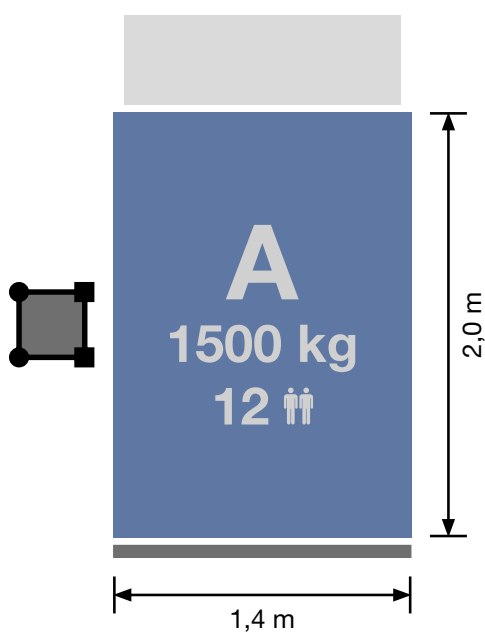

GEDA MULTILIFT P12 P platform A
1 loading sliding door / 1 unloading ramp

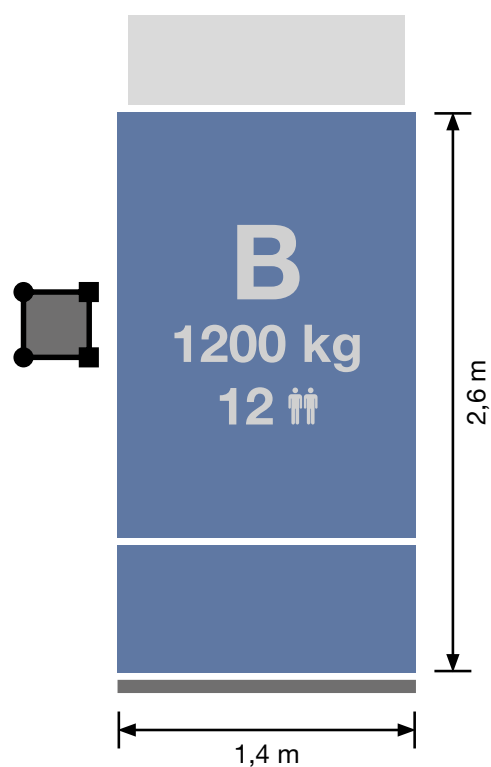

GEDA MULTILIFT P12 P platform B
1 loading sliding door / 1 unloading ramp

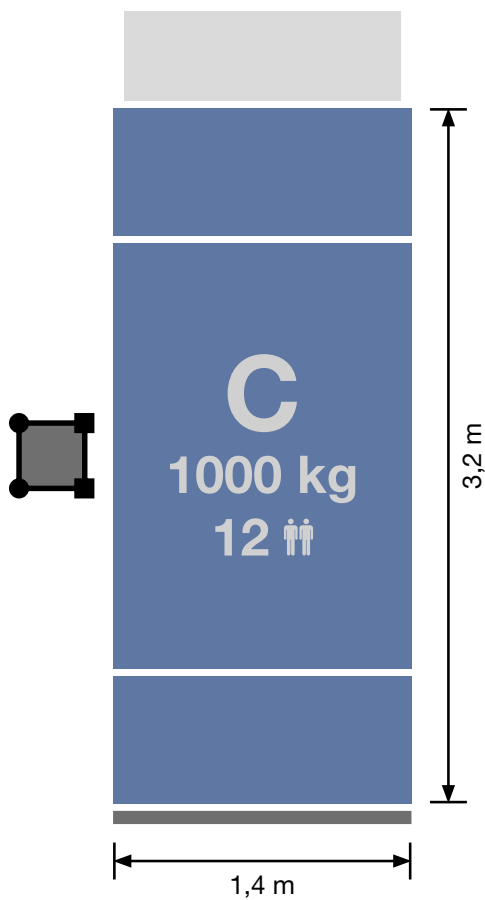

GEDA MULTILIFT P12 P platform C
1 loading sliding door / 1 unloading ramp

Landing level safety gate:

**For every project
the suitable
landing level safety gate -
we are happy to advise you!**

Accessories:

**For a wide range of
accessories visit:
www.geda.de**



GEDA® MULTILIFT P18 P

**Compact, pre-installed
base unit comprising:
car, enclosure, flat cable
bin and drive**

Modular system



**Facilitates and accelerates
regular inspection, main-
tenance and repair work**

**Break-off safety for flat
cable as a standard**

GEDA UNI-X-MAST system

**Automatic lubrication
device as a standard**



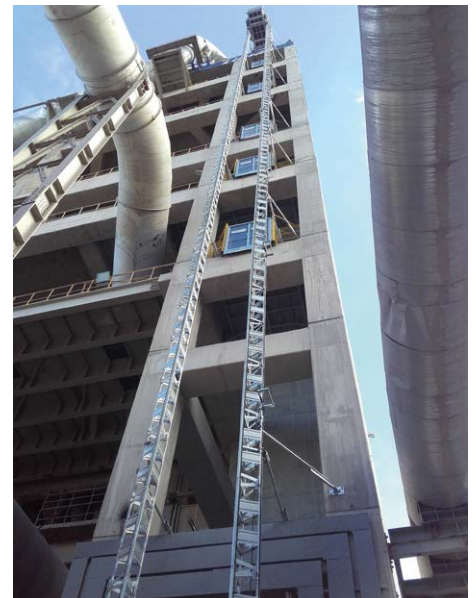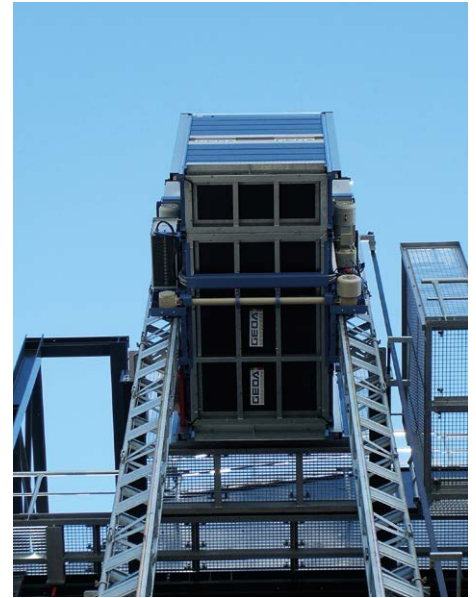

GEDA MULTILIFT P18 P

The GEDA Multilift P18 P is the strong partner for heavy loads for use with permanently installable hoist solutions. It is the ideal support tool for maintenance and repair tasks in all industry sectors. Guided on two masts, the hoist transports up to 2000 kg or 20 people in a closed car safely and efficiently. The hoist has three different platform variants and can therefore be easily adapted to on-site conditions.

The GEDA Multilift P18 P also scores highly thanks to the benefits of the proven GEDA Multilift range. The compact, pre-installed base unit comprising car, base enclosure, flat cable bin and drive ensures the smooth transport and rapid assembly of the hoist on-site.

The break-off safety for the flat cable is included in the delivery scope, so if the cable were to get caught, a limit switch prevents damage to the trailing cable.

Technical data:




2000 kg
20 persons



100 m




40 m/min




**15 kW/380-480 V/
50-60 Hz/32 A**


Platform:

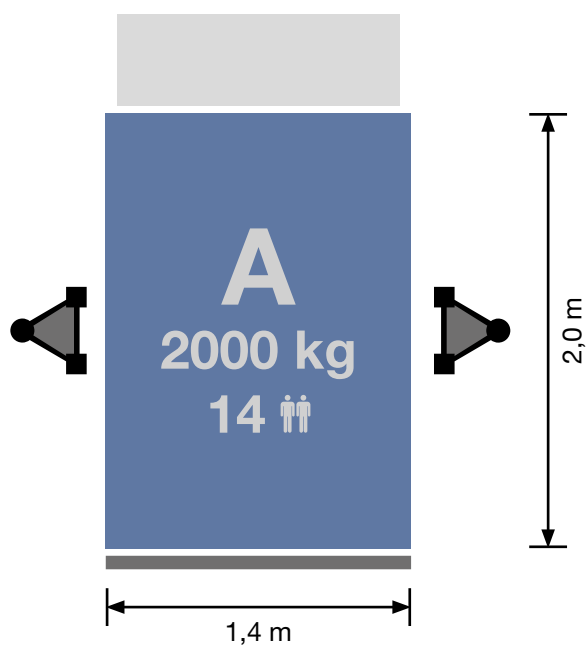

GEDA MULTILIFT P18 P platform A
1 loading sliding door / 1 unloading ramp

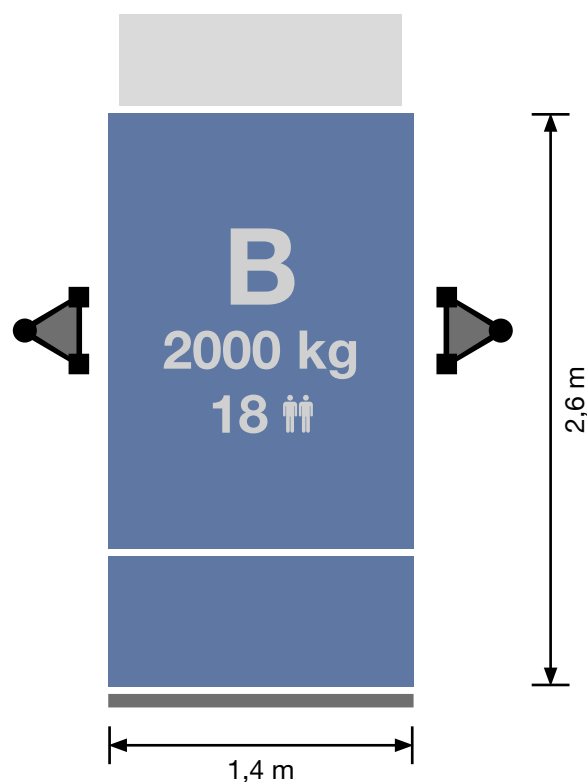

GEDA MULTILIFT P18 P platform B
1 loading sliding door / 1 unloading ramp

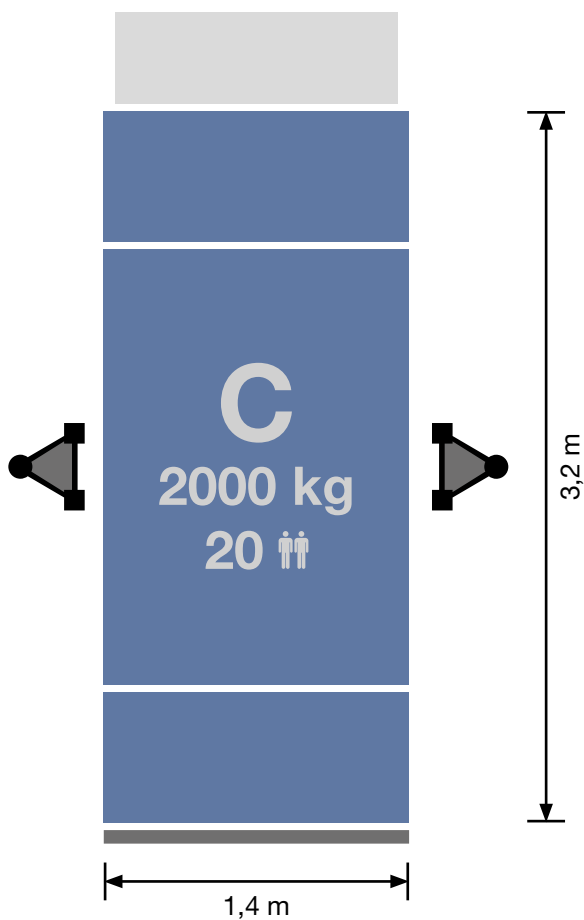

GEDA MULTILIFT P18 P platform C
1 loading sliding door / 1 unloading ramp

Landing level safety gate:

**For every project
the suitable
landing level safety gate -
we are happy to advise you!**

Accessories:

**For a wide range of
accessories visit:
www.geda.de**



SUSPENDED WORKING PLATFORMS

TEMPORARY INSTALLATIONS

SPECIAL PRODUCTS





GEDA®

AB 450

AB 650

**The perfect alternative
for working without
scaffolding on all
construction sites**



**Façade work regardless of
building height**

**Variable working
height adjustment for
ergonomically convenient
working**

**Modular aluminium
platform system
(segment length 1/2/3 m)**

**Push-to-connect
galvanised outrigger
modules**



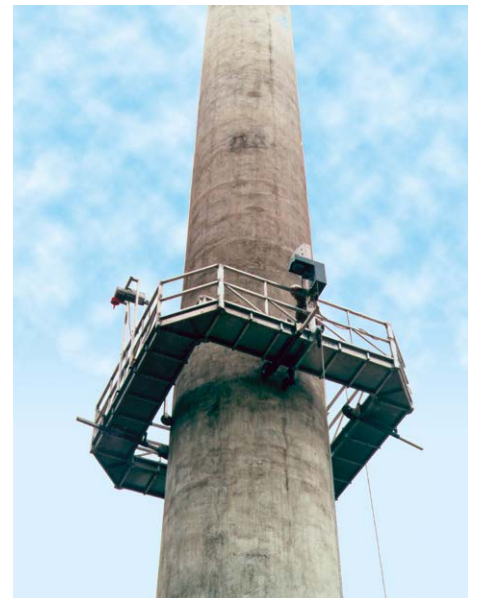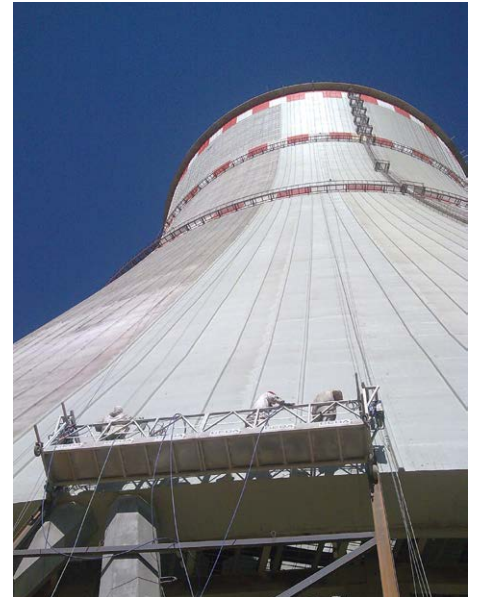

GEDA AB

GEDA Suspended Working Platforms allow working on all types of building façades without scaffolding.

The models GEDA AB 450 and GEDA AB 650 have been part of the GEDA range for many years, providing vertical transport for passengers and materials with a lifting force of 450 and 650 kp, respectively.

The operating height of the GEDA Suspended Working Platforms can be adjusted to within a centimetre, allowing work to always be carried out in the most ergonomically convenient position. Corner pieces and brackets can be used to adapt the platform to a wide variety of building shapes.

Easy and convenient handling is another crucial advantage. The push-to-connect design ensures fast assembly and disassembly of the galvanised outriggers. The individual components are very lightweight and can be transported by just one person, which also makes the assembled platform considerably easier to move.

Safety features such as the integrated tilt compensation and the overload protection ensure safe working at great heights.

Technical data:



**450 kp
650 kp**



8 m/min




**1.4 kW/230 V/50 Hz/16 A
1.4 kW/400 V/50 Hz/16 A**



1-14 m

GEDA® SUSPENDED WORKING PLATFORM STANDARD

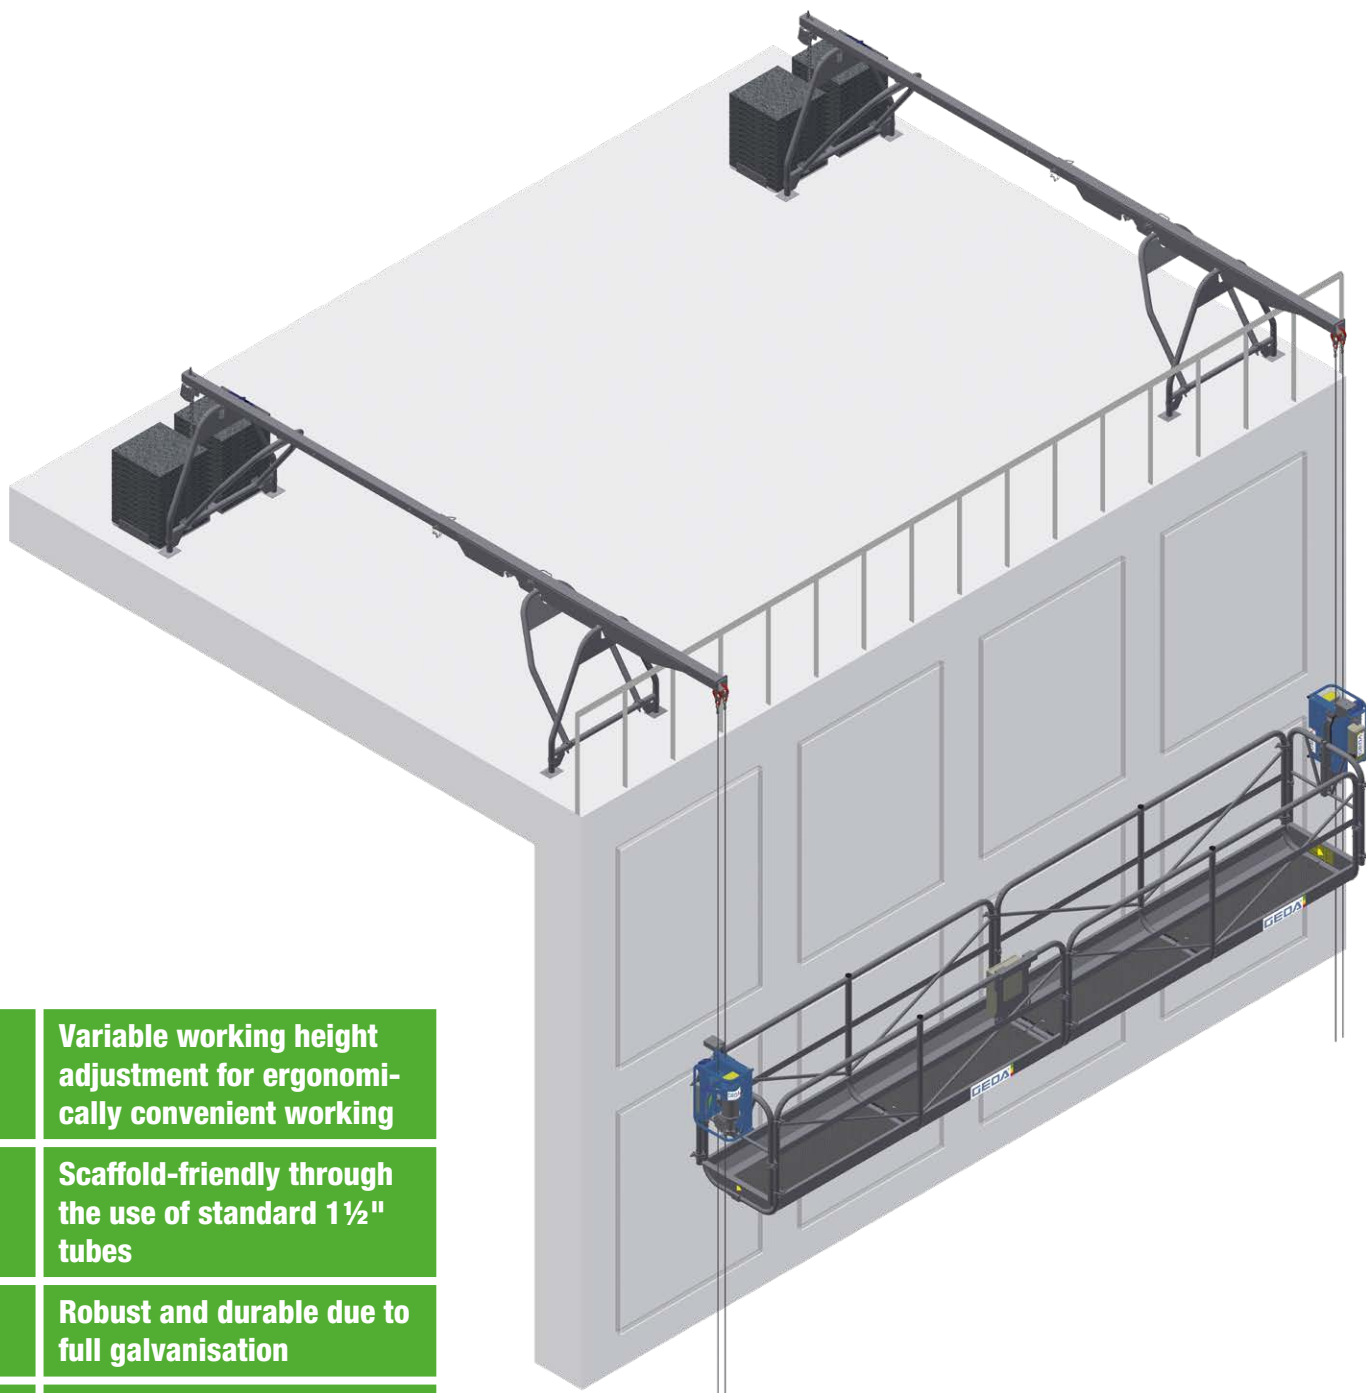

**Variable working height
adjustment for ergonomi-
cally convenient working**

**Scaffold-friendly through
the use of standard 1½" tubes**


**Robust and durable due to
full galvanisation**

**Easy to use due to
low weight of platform
and outrigger**

No losable small parts

**Outrigger can be used as
three-legged or
four-legged variant**



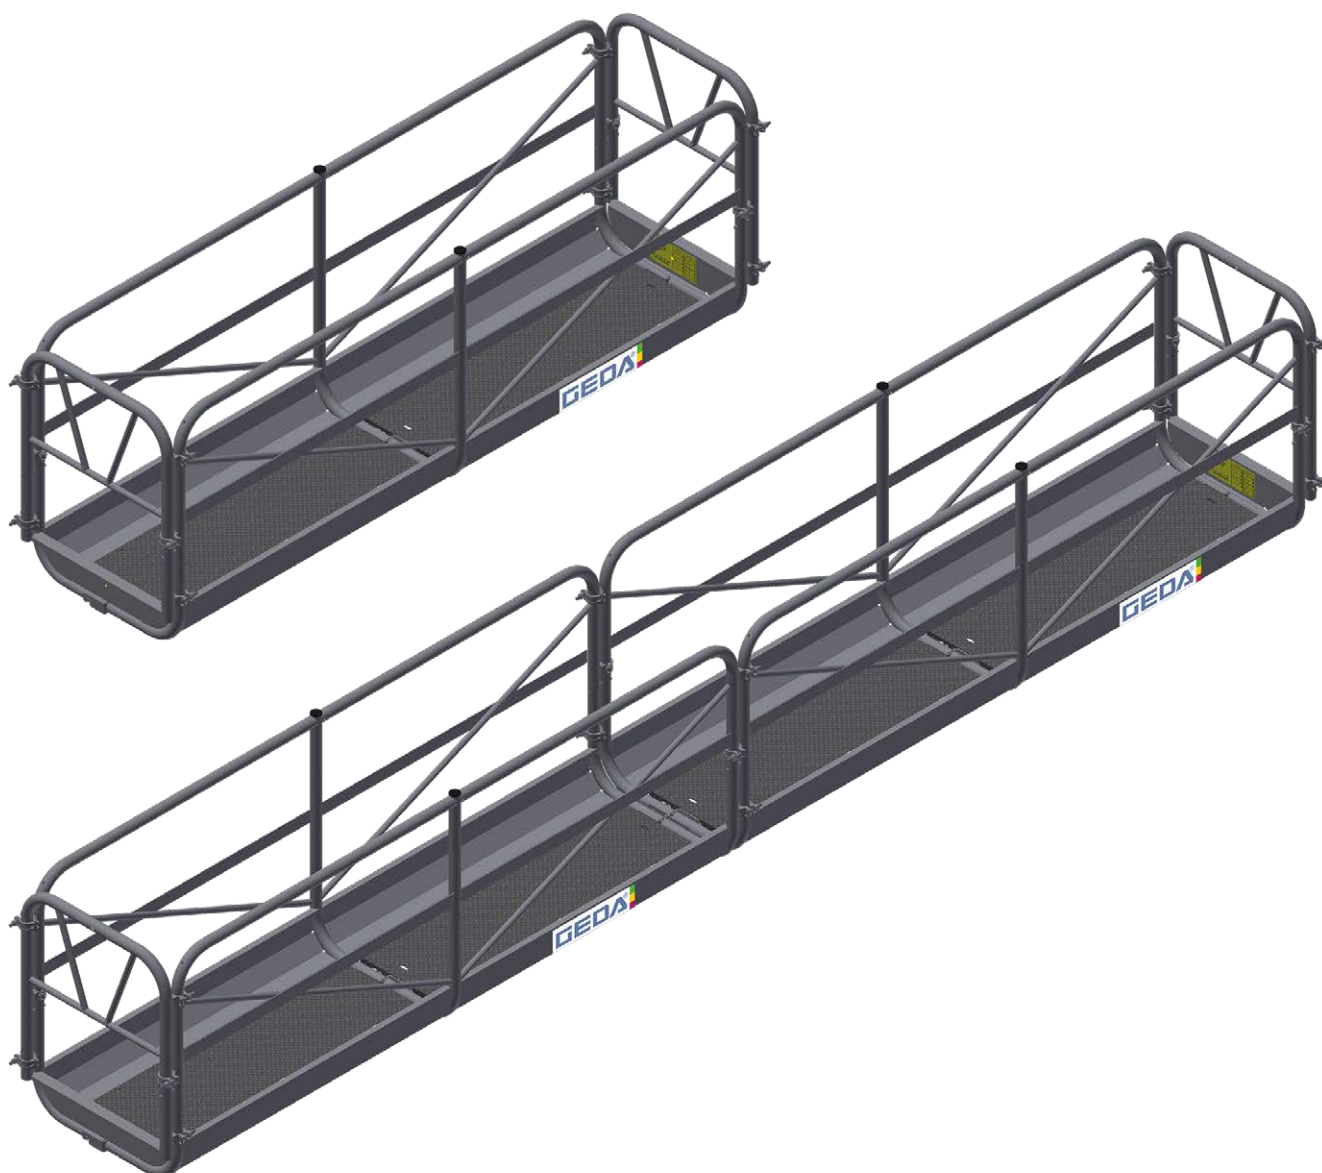

GEDA Suspended Working Platform Standard

The use of 1½" tubes ensures that the new GEDA Standard Suspended Working Platform is flexible to use and very scaffold-friendly. A particularly convenient feature is that the platforms and outriggers can be installed using just one spanner. The platform is big enough for passengers and materials and the high-precision adjustment of the operating height always ensures the most ergonomically convenient working position.

Both for transport and for assembly/disassembly, the new GEDA Standard Suspended Working Platform benefits greatly from the low dead weight of the platform and the outriggers. The easy handling – with no small parts that can be lost – also translates into considerable time and cost savings.

Suspended working platforms are often exposed to rough environmental conditions in daily operation at construction sites. But GEDA had made provisions for that as well: the full galvanisation of the robust platform defies wind and weather. The outrigger can be used as a three-legged or four-legged variant, ensuring maximum adaptability and flexibility depending on the specific conditions on site.


Technical data:



650 kp



8 m/min



**1.4 kW/400 V/
50 Hz/16 A**



3/6 m

GEDA® AB 650 M

**Efficient and reliable
material transport along
the façade**

**Flexibly adaptable to the
situation and requirements
on site**

**Conversion kit for
doubling the load capacity
to 1300 kg**

**Comprehensive safety
features**





GEDA AB 650 M

With traction of 650 kp and a lifting speed of 8 m/min, the GEDA AB 650 M material winch ensures efficient and reliable transport of materials along façades. Various suspension cable lengths, optional extension cords, outriggers (either with 2.0 or 2.8 m radius) and ballast weights ensure that the winch adapts flexibly to the conditions and requirements on site.

A conversion kit to a load capacity of 1300 kg is available for transporting greater loads.

It goes without saying that the GEDA AB 650 M material winch is equipped with the usual safety devices including a rope coil monitoring system and an overload safety device.


Technical data:



650 kp



8 m/min



**1.4 kW/400 V/
50 Hz/16 A**

GEDA RUBBISH CHUTE COMFORT

Oslo

Norway

RUBBISH CHUTES

TEMPORARY INSTALLATIONS



GEDA[®] RUBBISH CHUTE STANDARD



GEDA® RUBBISH CHUTE



GEDA RUBBISH CHUTE

The GEDA Rubbish Chutes from the Standard and Comfort ranges are a system for universal use.

The GEDA Rubbish Chutes use all the benefits of plastic: they are very quiet and also have a low dead weight, facilitating transport and assembly/disassembly.

Highly impact-resistant plastic, 6 mm material thickness and additional 3 mm wearing ribs on the low/wear GEDA Comfort Rubbish Chute ensure an extremely long service life compared to conventional chutes.

The GEDA Standard Rubbish Chute is made of high-quality plastic with 4 mm material thickness.

Both variants are equipped with double hooks to ensure secure attachment of the rubbish chutes – whether for use on walls, scaffolding, pitched roofs or flat roofs. A wide selection of different fastening elements ensures shortest possible setup times and efficient working. The range of convenient accessories allows dust-free working as well as simultaneous working at several stories.

GEDA® RUBBISH CHUTE

GEDA® RUBBISH CHUTE STANDARD



Technical data:

Length:

1.2 m

Wall thickness:

4 mm

Weight:

10 kg



GEDA® RUBBISH CHUTE

GEDA® RUBBISH CHUTE COMFORT



Technical data:

Length:

1.1 m

Wall thickness:

**6 mm + 3 mm
anti-wear ribs**

Weight:

12 kg



GEDA® RUBBISH CHUTE

Accessories:



Dump hopper
Art. No. 08922



Dump hopper
Art. No. 01921



Chute branch section with chains
Art. No. 01922



Chute liner
Art. No. 01919



Hand winch (21 m rope)
Art. No. 01907



Hand winch (41 m rope)
Art. No. 01908



Deflector ring
Art. No. 01918


For further accessories
visit: www.geda.de



GEDA®
BAUSCHUTTRUTSCHE
COMFORT

GEDA® RUBBISH CHUTE

Fixing devices:



Set of chains
Art. No. 01903



Fixing frame
Art. No. 01904



Set of balcony clamps
Art. No. 01902



Flat roof support
Art. No. 01911



Bolt down flat roof support
Art. No. 52104



Ballast weight
Art. No. 01912

Dust-free working?



Dust protection hood
Art. No. 01909



Dust collar
Art. No. 01913



Skip cover
Art. No. 01917

*No problem with the right
GEDA accessories!*











Copyright/Edition

© 2020 GEDA-Dechentreiter GmbH & Co. KG
Edition 03/2020/GB

Editor

GEDA-Dechentreiter
GmbH & Co. KG
Mertinger Strasse 60
86663 Asbach-Bäumenheim
Germany
Phone +49 (0) 906 9809-0
Fax +49 (0) 906 9809-50
info@geda.de
www.geda.de

VAT-ID No. DE 811917547
Registered at Augsburg, HRA
1381
General partner:
Dechentreiter Verwaltungs-GmbH
HRB 17 064
CEO: Johann Sailer

Production

GEDA-Dechentreiter
GmbH & Co. KG

Design & Pre-Press

GEDA-Dechentreiter
GmbH & Co. KG

Printer

Merkle Druck+Service GmbH,
Donauwörth

Guarantee and liability disclaimer

This issue of the Catalogue renders all other issues invalid. Our right to make changes is reserved. All details, including product-related information, are based on the specifications of the manufacturer. The catalogue author excludes any guarantee for the statements made in the catalogue. No guarantee is assumed for the usability of products for specific purposes or for the occurrence of damages or the appearance of defects through the statements or tips given herein.

Modifications/figures

Errors and omissions excepted. Similarly for figures.

Other models/variants

In the interest of further design changes, the right to make changes is reserved.

Colours

Colour deviations are possible on all products due to print reproduction.

Picture credits

GEDA-Dechentreiter
GmbH & Co. KG

TC/TCP

The general terms and conditions/general terms and conditions of purchase of GEDA-Dechentreiter GmbH & Co. KG shall apply. www.geda.de/en/tos

Prices

All prices (if stated or included in the Catalogue) are exclusive of shipping costs and statutory value-added tax.

Retention of title

Retention of title applies to all deliveries until full payment has been received.



THE NEXT LEVEL



Your dealer:



**GEDA-Dechentreiter
GmbH & Co. KG**

Mertinger Straße 60
86663 Asbach-Bäumenheim
Phone +49 (0) 906 9809-0
Fax +49 (0) 906 9809-50
info@geda.de
www.geda.de